

**UTL**<sup>®</sup> 上海尤提乐电器有限公司  
SHANGHAI UTILITY ELECTRICAL., LTD

服务热线 **400-021-8088**

Room D2301, No.1759, North Zhongshan Road,  
Putuo District, Shanghai 200061  
上海市普陀区中山北路1759号D2301室  
Tel: +86-21-6147-8436  
+86-21-6147-8345  
Fax: +86-21-6147-8348  
E-mail: marketing@china-utl.com





# BRIF INTRODUCTION

SHANGHAI UTILITY ELECTRICAL CO., LTD. is a professional manufacturer of all kinds of Terminal blocks, Connectors, Nylon cable glands and Push buttons, which was founded in 1990. Through persistent research and development, we have grown into a leading manufacturer of this field. The main products have gained the certificates, such as VDE, UL, CE, CS, RoHS, ISO9001, CCC and CCS etc.

For UTL company, innovation is the base of developing and unique research system is the central competitive power. In recent years, we constantly increase the R&D investment, and now we are holding a first-class research center and an expert team included several senior engineers. We have also set up a mould process center and a product test center. Relying the advanced management mode, abundant technology strength, excellent process facility, first-class test equipment and skilled mould process technology, we are able to supply the high-quality products with reliable guarantee.

We also accept OEM/ODM orders and special designs to serve the customer better. Under the instruction of serving excellent electronics manufacturers of the globe, we keep a good business relationship with many world-famous companies.

With the spirit of "Pursuing Excellence, Innovating for Quality", UTL always keeps the promise "All best service for all customers". UTL warmly welcome domestic and foreign customers to cooperate with us to make prosperous future.

尤提乐电气有限公司成立于1990年，是接线端子行业内专业化生产、经销商，是该行业里技术力量雄厚、成长迅速、极具规模化的企业。

公司成立以来，在社会各界的关怀支持下，经公司全体同仁共同努力，十几年来尤提乐取得了令人瞩目的成绩，从销售业绩到企业形象均得到了客户及业界同行的认可，并取得了可喜的品牌效应。

公司一贯坚持“以人为本，以市场为导向”的经营理念，在产品标准方面，尤提乐潜心研究了IEC、UL、CSA、GB、CE、CCC等国际国内关于接线端子的标准，并按照这些标准自行编制了更为严格的企业标准，从产品的开发、模具的设计、原材料的采购、金属零部件的制作、塑料配件的成型，到成品组装以及品质检测、包装发货等，每个环节均由专业的人员按照相应的标准层层把关，以生产适销对路、应用于全球范围内工业自动化领域的产品为己任，积极追随、引进、借鉴国际知名品牌产品的技术，科技创新，锐意进取。目前公司生产的数十个系列，上千个规格的产品，为客户选型提供了丰富的产品保障。公司通过了ISO9001质量管理体系认证，绝大部分产品通过了UL、CSA、CCC、CCS、CE认证，部分产品通过了VDE认证，所有产品均符合Ro环保要求。其中JUT1系列、JUT2系列、JUT3系列、JUT4系列接线端子，已达到国内外同类产品的先进水平，部分产品已被国家电力部门指定、推荐为全国城乡电网改造的首选产品。

产品主要销往法国、俄罗斯、巴西、东南亚、香港和台湾等地区，作为一家以外销为主（出口65%）的民营独资企业，尤提乐置身于国际市场，直接感受市场气息，当面倾听客户需求，不断提升产品设计、生产、经营、管理过程中的技术含量，对生产作业的全过程实施科学的管理。

近年来“尤提乐”名声遍大江南北，“尤提乐”的经营理念发挥得淋漓尽致、深得人心，“尤提乐”的服务颇得广大客户赞赏。“腾飞的尤提乐，骄傲的尤提乐人”，尤提乐人正是凭借先进的管理模式、雄厚的技术实力、完善的工艺制程、一流的检测设备和精湛的模具加工技术，以生产高性价比的产品为前提，凭借卓越的销售团队、周密的销售网络、专业化的服务，赢得了开拓市场新篇章的今天。☺

应用广泛 经验丰富  
Widely applied  
Extensive experience





# ADHERE TO THE QUALITY PERFECT DETAILS

High quality is the guarantee to win the market, and effective modern management and quality system is the premise of supporting high-quality, strive to break the spirit of innovation as a constant driving force and the pursuit of exquisite quality, Company introduced a total quality management

高品质是赢得市场的保证，而有效的现代化管理和质量体系是支撑高品质的前提，力求突破创新的精神，作为不断向前的动力和追求精湛质量，公司推行全面质量管理。

## 坚持品质 完美细节

一直以来

坚持质量就是生命的经营理念

始终印证着我们发展的每一个脚步

我们因此赢得的不仅是全部信赖的目光

更是鉴定着我们进取的决心与信心

As always all the time

We hold the concept that quality is life

It is proving each step of our development

What we have achieved is not only the trust

But also our determination and confidence of keeping going.



PEOPLE  
-ORIENTED

# TECHNOLOGY INNOVATION

以人为本，科技创新

坚持以人为本的理念

在生产发展过程中

注重员工的知识水平和业务能力


有计划有组织地开展各项培训工作

不断地提高学习和创造能力

以科技为发展的动力

在原有的基础上

致力于各项产品的研发和创新

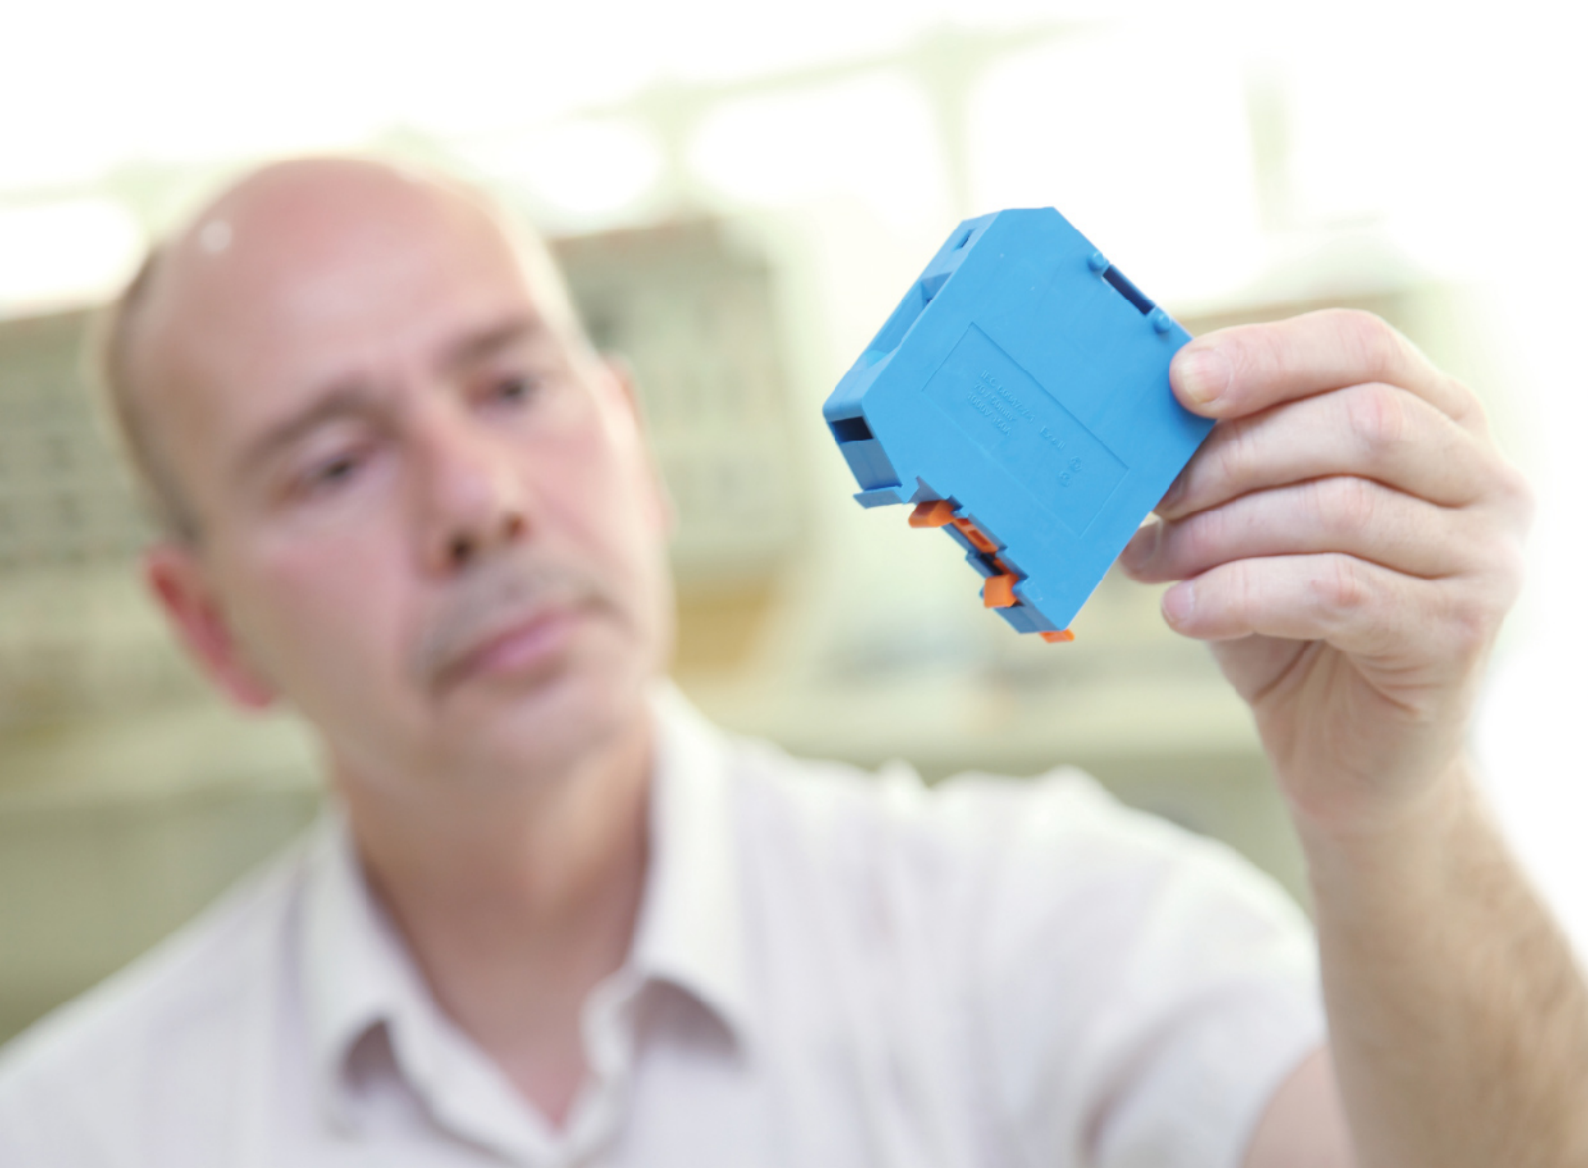

## CONTENT

### 目录

工业配电接线端子 — 螺钉类（通用型） 01  
Industrial Distribution Terminal Block – Screw type (Universal)

工业配电接线端子 — 螺钉类（组合型） 21  
Industrial Distribution Terminal Block – Screw type (Combination)

工业配电接线端子 — 弹簧类接线端子系列 31  
Industrial Distribution Terminal Block – Spring type terminal series

工业配电接线端子 — 开关型端子系列 43  
Industrial Distribution Terminal Block – Switching terminal series

工业配电接线端子 — 保险丝型端子系列 47  
Industrial Distribution Terminal Block – Fuse type terminal series

工业配电接线端子 — 穿墙式接线端子系列 51  
Industrial Distribution Terminal Block – Pass through board terminal series

工业配电接线端子 — 基座型接线端子系列 52  
Industrial Distribution Terminal Block – Base type terminal series

附件 58  
Attachment

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



实用特征

端子具有通用安装脚能方便快速的安装在U型导轨 NS35及G型导轨NS32上。

封闭型的螺钉引导孔即方便螺丝刀操作，又可防止螺丝旋松后跌落机外。

电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现。

对多个截面的端子配备了通用附件，如：端板、分組隔板、隔片等；

绝缘外壳采用机械强度高，电气特性好，弹性极佳的进口工程塑料—聚酰胺（尼龙）66。

顶部二端采用白色标记采列，可实现统一标识。

Practical features

Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;

Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out;

Electric potential distribution is realized by either connecting central adaptor to the center of terminal or inserting a side adaptor to the cone jack;

General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections;

The insulating shell is made of imported engineering plastic—polyamide(Nylon)66, which is of high mechanical intensity, good electric property, and super flexibility;

Two ends on the top with white marking system to realize uniformed sign.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 型，或NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

(1)端板 End plate




(2)中心联络件：置于端子中央，实现横向导通。螺钉头带绝缘罩，可分：2-位、3-位、5-位、10-位。  
Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulating which is divided into 2-digit, 3-digit, 5-digit and 10-digit



(3)边插式联络件：全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.



(4)跨接联络件：10位，可分，带10枚螺钉，可形成跨接某些端子的跨接。  
Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals



(5)绝缘隔片：用于相邻联络件的电气隔离，可事后插入，不占导轨任何空间。  
Insulating spacer for electric separation of two neighboring adaptors, they may be inserted afterwards and not occupy any space of track



(6)分組隔片：用于端子组间的视觉及电气隔离。  
Segment spacer for visual and electric separation between neighboring terminal groups.




(7)测试插座：与测试插头形成测试连接。  
Test socket: to form a testing connection by using test plug.



(8)测试插头：与测试插座形成测试连接。  
Test plug: to form a testing connection by using test socket.



(9)标记条：有横尚和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(10)标记夹：用来对端子进行标识，夹在绝缘固定件上，高度可调，尺寸为44×7mm（JUT1系列适用）。  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44×7 mm (General used for JUT1 series)



(11)终端固定件：标记夹和跨接件可在其上固定进行标识。另外端子排端盖固定件（JUT1系列适用）Terminal fixed component: mark clip and cross clip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



(12)警示牌 Warning board



JUT1-1.5

|                               |                |          |      |     |
|-------------------------------|----------------|----------|------|-----|
| 厚/宽/高/高                       | 4.2/42.5/42/47 |          |      |     |
| Thickness/Width/Height/Height |                |          |      |     |
| 刚性导线 (mm²)                    | 柔性导线 (mm²)     | U        |      |     |
| Rigid cable                   | Soft cable     | (A) (V)  |      |     |
| AWG 26-18                     | 0.14-1.5       | 0.14-1.5 | 17.5 | 500 |
| IEC 60947-7-1                 |                |          |      |     |

型号 Model 订货号 Order Number

JUT1-1.5 5 574 101

G-JUT1-1.5/2.5B 8 050 101

JFB10-1.5 5 585 100

JAP 8 750 101

ZB4 8 868 101

KLM-A 5 574 143

E/1 5 103 001

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



JUT1-2.5B

|                               |                |         |    |     |
|-------------------------------|----------------|---------|----|-----|
| 厚/宽/高/高                       | 6.2/42.5/42/47 |         |    |     |
| Thickness/Width/Height/Height |                |         |    |     |
| 刚性导线 (mm²)                    | 柔性导线 (mm²)     | U       |    |     |
| Rigid cable                   | Soft cable     | (A) (V) |    |     |
| AWG 24-12                     | 0.2-4          | 0.2-2.5 | 32 | 690 |
| IEC 60947-7-1                 |                |         |    |     |

型号 Model 订货号 Order Number

JUT1-2.5B 5 574 102

G-JUT1-1.5/2.5B 8 050 101

JFB10-4 5 585 120

JEB2-4 5 582 112

JEB3-4 5 582 113

JEB10-4 5 582 110

JB110-4 5 584 100

JS-KK3 8 751 101

JAP 8 750 101

PSB3/10/4 8 573 101

MPS 5 553 101

ZB6 8 868 103

KLM-A 5 574 143

E/1 5 103 001

JWS6 8 867 111



JUT1-2.5

|                               |                |         |    |     |
|-------------------------------|----------------|---------|----|-----|
| 厚/宽/高/高                       | 5.2/42.5/47/52 |         |    |     |
| Thickness/Width/Height/Height |                |         |    |     |
| 刚性导线 (mm²)                    | 柔性导线 (mm²)     | U       |    |     |
| Rigid cable                   | Soft cable     | (A) (V) |    |     |
| AWG 24-12                     | 0.2-4          | 0.2-2.5 | 32 | 800 |
| IEC 60947-7-1                 |                |         |    |     |

型号 Model 订货号 Order Number

JUT1-2.5 5 574 103

G-JUT1-2.5/10 8 050 102

JFB10-2.5 5 585 110

JEB2-2.5 5 582 102

JEB3-2.5 5 582 103

JEB10-2.5 5 582 100

JB110-4 5 584 100

JS-K 8 751 102

JAP 8 750 101

PSB3/10/4 8 573 101

MPS 5 553 101

ZB5 8 868 102

KLM-A 5 574 143

E/1 5 103 001

JW5 8 867 101



JUT1-4

|                               |                |         |    |     |
|-------------------------------|----------------|---------|----|-----|
| 厚/宽/高/高                       | 6.2/42.5/47/52 |         |    |     |
| Thickness/Width/Height/Height |                |         |    |     |
| 刚性导线 (mm²)                    | 柔性导线 (mm²)     | U       |    |     |
| Rigid cable                   | Soft cable     | (A) (V) |    |     |
| AWG 24-10                     | 0.2-6          | 0.2-4   | 41 | 800 |
| IEC 60947-7-1                 |                |         |    |     |

型号 Model 订货号 Order Number

JUT1-4 5 574 104

G-JUT1-2.5/10 8 050 102

JFB10-4 5 585 120

JEB2-4 5 582 112

JEB3-4 5 582 113

JEB10-4 5 582 110

JB110-4 5 584 100

JS-K 8 751 102

JAP 8 750 101

PSB3/10/4 8 573 101

MPS 5 553 101

ZB6 8 868 103

KLM-A 5 574 143

E/1 5 103 001

JW6 8 867 111

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



由于从JUT1-2.5到JUT1-10所有端子的外型轮廓相同，所以分组隔板或端板等附件都能通用。

For the terminals appearance out-line from JUT1-2.5 to JUT1-10 are same, so the grouping or header and other attachments could be universally used.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 型、或NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35.

(1)端板 End plate

②中心连接片：用于端子中央，实现横向连接。螺钉头带绝缘罩，可分：2-位、3-位、5-位、10-位。  
Central adapter used at the center of terminal for transverse bridge connection, and provided with insulating which is divided into 2-digit, 3-digit, 5-digit and 10-digit.

③边插式取线件：全绝缘2位、全绝缘3位、全绝缘10位。  
Side adapter/Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.

④跨接取线件：10位，可分：带10枚螺钉，可形成跨接某些端子的跨接。  
Cross connection adapter in 10 digit detachable, with 10 screws, for cross connection by overlapping some terminals.

⑤绝缘隔板：用于相邻连接件的电气隔离，可事后插入，不占导轨任何空间。  
Insulating spacer for electric separation of two neighboring adapters, they may be inserted afterwards, and not occupy any space of track.

⑥分组隔板：用于端子组间的视觉及电气隔离。  
Segment spacer for visual and electric separation between neighboring terminal groups.

⑦测试插座：与测试插头形成测试连接。  
Test socket: to form a testing connection by using test plug.

⑧测试插头：与测试插座形成测试连接。  
Test plug: to form a testing connection by using test socket.

⑨标记条：有横尚和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.

⑩标记夹：用来对端子进行标记，卡在绝缘固定件上，高度可调，书写面积：44×7mm (JUT1系列通用)。  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44×7 mm (general used for JUT1 series).

⑪绝缘固定件：标记夹和标记条可卡在其上面进行标记。另对端子排端部固定件用JUT1系列作用。  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's a terminal universal for JUT1 series.

(12)警示牌 Warning board



| JUT1-6                               |                |       |        |
|--------------------------------------|----------------|-------|--------|
| 厚/宽/高/高                              | 8.2/42.5/47/52 |       |        |
| Thickness/Width/Height/Height        |                |       |        |
| 刚性导线 (mm²)   柔性导线 (mm²)   U          |                |       |        |
| Rigid cable   Soft cable   (A)   (V) |                |       |        |
| AWG:24-8                             | 0.2-10         | 0.2-6 | 57 800 |
| IEC 60947-7-1                        |                |       |        |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|        |           |
|--------|-----------|
| JUT1-6 | 5 574 105 |
|--------|-----------|

|               |           |
|---------------|-----------|
| G-JUT1-2.5/10 | 8 050 102 |
|---------------|-----------|

|         |           |
|---------|-----------|
| JFB10-6 | 5 585 130 |
|---------|-----------|

|         |           |
|---------|-----------|
| JEB2-6  | 5 582 122 |
| JEB3-6  | 5 582 123 |
| JEB10-6 | 5 582 120 |

|         |           |
|---------|-----------|
| JBI10-6 | 5 584 110 |
|---------|-----------|

|      |           |
|------|-----------|
| JS-K | 8 751 102 |
|------|-----------|

|     |           |
|-----|-----------|
| JAP | 8 750 101 |
|-----|-----------|

|          |           |
|----------|-----------|
| PSB4/7/6 | 8 573 102 |
|----------|-----------|

|    |           |
|----|-----------|
| PS | 5 553 102 |
|----|-----------|

|     |           |
|-----|-----------|
| ZB8 | 8 868 104 |
|-----|-----------|

|       |           |
|-------|-----------|
| KLM-A | 5 574 143 |
|-------|-----------|

|     |           |
|-----|-----------|
| E/1 | 5 103 001 |
|-----|-----------|

|     |           |
|-----|-----------|
| JW8 | 8 867 103 |
|-----|-----------|

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



| JUT1-10                              |                 |        |        |
|--------------------------------------|-----------------|--------|--------|
| 厚/宽/高/高                              | 10.2/42.5/47/52 |        |        |
| Thickness/Width/Height/Height        |                 |        |        |
| 刚性导线 (mm²)   柔性导线 (mm²)   U          |                 |        |        |
| Rigid cable   Soft cable   (A)   (V) |                 |        |        |
| AWG:20-6                             | 0.5-16          | 0.5-10 | 76 800 |
| IEC 60947-7-1                        |                 |        |        |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|         |           |
|---------|-----------|
| JUT1-10 | 5 574 106 |
|---------|-----------|

|               |           |
|---------------|-----------|
| G-JUT1-2.5/10 | 8 050 102 |
|---------------|-----------|

|          |           |
|----------|-----------|
| JFB10-10 | 5 585 140 |
|----------|-----------|

|          |           |
|----------|-----------|
| JEB2-10  | 5 582 132 |
| JEB3-10  | 5 582 133 |
| JEB10-10 | 5 582 130 |

|          |           |
|----------|-----------|
| JBI10-10 | 5 584 120 |
|----------|-----------|

|      |           |
|------|-----------|
| JS-K | 8 751 102 |
|------|-----------|

|     |           |
|-----|-----------|
| JAP | 8 750 101 |
|-----|-----------|

|          |           |
|----------|-----------|
| PSB4/7/6 | 8 573 102 |
|----------|-----------|

|    |           |
|----|-----------|
| PS | 5 553 102 |
|----|-----------|

|      |           |
|------|-----------|
| ZB10 | 8 868 105 |
|------|-----------|

|       |           |
|-------|-----------|
| KLM-A | 5 574 143 |
|-------|-----------|

|     |           |
|-----|-----------|
| E/1 | 5 103 001 |
|-----|-----------|

|      |           |
|------|-----------|
| JW10 | 8 867 104 |
|------|-----------|



| JUT1-16                              |                 |      |         |
|--------------------------------------|-----------------|------|---------|
| 厚/宽/高/高                              | 12.2/42.5/54/59 |      |         |
| Thickness/Width/Height/Height        |                 |      |         |
| 刚性导线 (mm²)   柔性导线 (mm²)   U          |                 |      |         |
| Rigid cable   Soft cable   (A)   (V) |                 |      |         |
| AWG:12-4                             | 2.5-25          | 4-16 | 101 800 |
| IEC 60947-7-1                        |                 |      |         |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|         |           |
|---------|-----------|
| JUT1-16 | 5 574 107 |
|---------|-----------|

|           |           |
|-----------|-----------|
| G-JUT1-16 | 8 050 103 |
|-----------|-----------|

|          |           |
|----------|-----------|
| JFB10-16 | 5 585 150 |
|----------|-----------|

|          |           |
|----------|-----------|
| JEB10-16 | 5 582 140 |
|----------|-----------|

|          |           |
|----------|-----------|
| JBI10-16 | 5 584 120 |
|----------|-----------|

|      |           |
|------|-----------|
| JS-K | 8 751 102 |
|------|-----------|

|     |           |
|-----|-----------|
| JAP | 8 750 101 |
|-----|-----------|

|          |           |
|----------|-----------|
| PSB4/7/6 | 8 573 102 |
|----------|-----------|

|    |           |
|----|-----------|
| PS | 5 553 102 |
|----|-----------|

|      |           |
|------|-----------|
| ZB10 | 8 868 105 |
|------|-----------|

|       |           |
|-------|-----------|
| KLM-A | 5 574 143 |
|-------|-----------|

|     |           |
|-----|-----------|
| E/1 | 5 103 001 |
|-----|-----------|

|      |           |
|------|-----------|
| JW12 | 8 867 105 |
|------|-----------|



| JUT1-35                              |               |         |          |
|--------------------------------------|---------------|---------|----------|
| 厚/宽/高/高                              | 15.2/50/62/67 |         |          |
| Thickness/Width/Height/Height        |               |         |          |
| 刚性导线 (mm²)   柔性导线 (mm²)   U          |               |         |          |
| Rigid cable   Soft cable   (A)   (V) |               |         |          |
| AWG:18-0                             | 0.75-50       | 0.75-35 | 150 1000 |
| IEC 60947-7-1                        |               |         |          |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|         |           |
|---------|-----------|
| JUT1-35 | 5 574 109 |
|---------|-----------|

封闭型外壳，不用端板。  
Sealed outer-case, don't need end plate

|         |           |
|---------|-----------|
| JFB2-35 | 5 585 162 |
| JFB3-35 | 5 585 163 |

|          |           |
|----------|-----------|
| JEB10-35 | 5 582 150 |
|----------|-----------|

|      |           |
|------|-----------|
| JS-K | 8 751 102 |
|------|-----------|

|          |           |
|----------|-----------|
| PSB6/5/6 | 8 573 103 |
|----------|-----------|

|    |           |
|----|-----------|
| PS | 5 553 102 |
|----|-----------|


|      |           |
|------|-----------|
| ZB10 | 8 868 105 |
|------|-----------|

|       |           |
|-------|-----------|
| KLM-A | 5 574 143 |
|-------|-----------|

|     |           |
|-----|-----------|
| E/1 | 5 103 001 |
|-----|-----------|

|      |           |
|------|-----------|
| JW15 | 8 867 106 |
|------|-----------|

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )

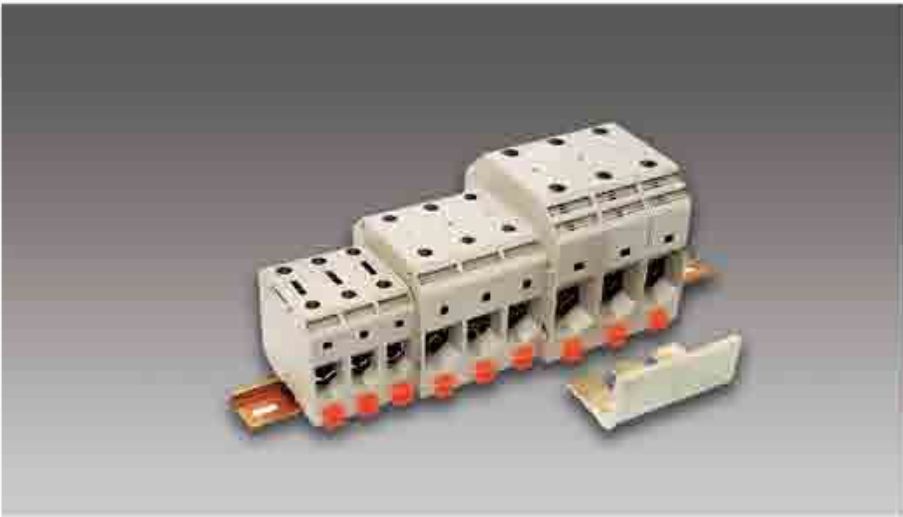

实用特征

- 棱形插入式压线框，能保证导线三点对中。
- 压线框底面带槽纹，确保接线后接触表面具有低值过渡电阻。
- 利用弹性元件实现螺钉自锁。

Practical features

- Prism inserted-type wire-pressing frame could ensure that the three points of lead can be directed at center.
- The bottom side of wire-pressing frame has some trough line, which ensures that the connection surface owns low transition resistance after wiring.
- Elastic element can make the screw self-lock.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32型、或NS35型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35.

(1)中心联桥件：用于端子中央，实现横向往桥接，螺钉头带绝缘圈，桥面需将外层的铜片打通。  
Central adaptor used at the center of terminal to realize crosswise bridging, and the screw head has insulation circle, the outer-case isolation slice should be get through before bridging.

(2)边插式联桥件：全绝缘，插入压线框中，并上紧在端子绝缘外壳上。  
Side adaptor: The whole-insulation is inserted into wire-pressing frame, additionally, it should be blocked onto terminal's insulation outer-case.

(3)分接端子：用于连接大电流的较小截面的导线，以实现额定工作电压至1000V大电流分接。  
Tapping terminal: used to connect great-current lead with smaller section to realize great-current tapping with rated work voltage being 1000V.

(4)棱柱补偿块：垫平压线框底面，以连接扁平导线。  
Prism compensation-lump: leveling up prism bottom side of wirepressing frame to be connected with flat lead.

(5)终端固定件：标记夹和标记条可卡在它上面进行标识。另对端子排起固定作用（JUT1系列通用）  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series).

(6)标记条：有横向和纵向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.

(7)标记端子：用来对端子排进行标示，可安装在C型、或L型导轨上。端子带插入式标记条，书写面积44×17mm<sup>2</sup>（标记端子JUT1系列产品通用）  
Mark terminal: used to mark terminal row, it can be installed on the C-type and L-type track, the terminal row is marked-type mark strip with writing area of 44×17 mm<sup>2</sup> (universal for series product with JUT1 mark terminal).



JUT1-50

|                                                       |                            |
|-------------------------------------------------------|----------------------------|
| 厚/宽/高/高                                               | 20.2/71.3/77.2/82.4        |
| Thickness/Width/Height/Height                         |                            |
| 刚性导线 (mm <sup>2</sup> ) / 柔性导线 (mm <sup>2</sup> ) / U |                            |
| Rigid cable / Soft cable / (A) / (V)                  |                            |
| AWG: 6-0                                              | 16-50 / 25-30 / 150 / 1000 |
| IEC 60947-7-1                                         |                            |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT1-50 5 574 111

JFB2-50 5 585 172  
JFB3-50 5 585 173

JUT1-50FJ 5 574 139

JUT1-50EP 8 053 111

E/1 5 103 001

ZB10 8 868 105

JUT1-B 5 574 142

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



JUT1-95

|                                                       |                            |
|-------------------------------------------------------|----------------------------|
| 厚/宽/高/高                                               | 26/83.6/91.60/97.40        |
| Thickness/Width/Height/Height                         |                            |
| 刚性导线 (mm <sup>2</sup> ) / 柔性导线 (mm <sup>2</sup> ) / U |                            |
| Rigid cable / Soft cable / (A) / (V)                  |                            |
| AWG: 4-000                                            | 25-95 / 35-95 / 232 / 1000 |
| IEC 60947-7-1                                         |                            |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT1-95 5 574 112

JEB2-95 5 582 162  
JEB3-95 5 582 163

JUT1-95FJ 5 574 140

JUT1-95EP 8 053 112

E/1 5 103 001

ZB10 8 868 105

JUT1-B 5 574 142



JUT1-150

|                                                       |                              |
|-------------------------------------------------------|------------------------------|
| 厚/宽/高/高                                               | 31.6/101/112.5/118           |
| Thickness/Width/Height/Height                         |                              |
| 刚性导线 (mm <sup>2</sup> ) / 柔性导线 (mm <sup>2</sup> ) / U |                              |
| Rigid cable / Soft cable / (A) / (V)                  |                              |
| AWG: 2-300                                            | 35-150 / 50-150 / 309 / 1000 |
| IEC 60947-7-1                                         |                              |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT1-150 5 574 113

JEB2-150 5 582 172  
JEB3-150 5 582 173

JUT1-150FJ 5 574 141

JUT1-150/240EP 8 053 113

E/1 5 103 001

ZB10 8 868 105

JUT1-B 5 574 142



JUT1-240

|                                                       |                              |
|-------------------------------------------------------|------------------------------|
| 厚/宽/高/高                                               | 36.6/102/126.4/131.9         |
| Thickness/Width/Height/Height                         |                              |
| 刚性导线 (mm <sup>2</sup> ) / 柔性导线 (mm <sup>2</sup> ) / U |                              |
| Rigid cable / Soft cable / (A) / (V)                  |                              |
| AWG: 00-500                                           | 70-240 / 70-240 / 415 / 1000 |
| IEC 60947-7-1                                         |                              |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT1-240 5 574 161

JEB2-240 5 582 182  
JEB3-240 5 582 183

JUT1-240FJ 5 574 141

JUT1-150/240EP 8 053 113

E/1 5 103 001

ZB10 8 868 105

JUT1-B 5 574 142

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type (Universal)



JUT1-16B

|                                      |                           |
|--------------------------------------|---------------------------|
| 厚 / 宽 / 高 / 高                        | 12.2/42.5/47/52           |
| Thickness/Width / Height/ Height     |                           |
| 刚性导线 (mm²) / 柔性导线 (mm²) / U          |                           |
| Rigid cable / Soft cable / (A) / (V) |                           |
| AWG: 12-4                            | 2.5-25 / 4-16 / 101 / 400 |
| IEC 60947-7-1                        |                           |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-16B 5 574 108

G-JUT1-2.5/10 8 050 102

JFB10-16 5 585 150

JEB10-16 5 582 140

JS-K 8 751 102

JAP 8 750 101

PSB4/7/6 8 573 102

PS 5 553 102

ZB10 8 868 105

JW12 8 867 105

JUT1系列建筑安装接线端子的特点是结构紧凑，在高度的有限扁平配电箱内进行接线安装时，需要使用该类端子。

外轮廓相同的接地端子JUT1-16B与JUT1-35B的标准的接地端子一样直接和导轨相连，因而导轨作为PE接地汇流条使用。

JUT1 series of construction installment wiring terminal owns the characteristic of compact structure, it is very useful in case of being installed in flat distributing box with limited height.

The JUT1-16B and JUT2-35B landing terminal with same outer outline could be connected directly with track as standard landing terminal, therefore, the guide track can be used as PE landing bus-bar.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 型、或NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

(1)端板 End plate



(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分：2-位、3-位、5-位、10-位。  
Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is divided into: 2-digit, 3-digit, 5-digit and 10-digit



(3)边插式联络件：全绝缘2位 全绝缘3位 全绝缘10位。  
Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit



(4)绝缘隔片：用于相邻联络件的电气隔离；可事后插入，不占导轨任何空间。  
Insulating spacer for electric separation of two neighboring adaptors, they may be inserted afterwards, and not occupy any space of track



(5)分組隔片：用于端子组间的视觉及电气隔离。  
Segment spacer for visual and electric separation between neighboring terminal groups




(6)测试插座：与测试插头形成测试连接。  
Test socket: to form a testing connection by using test plug



(7)测试插头：与测试插座形成测试连接。  
Test plug: to form a testing connection by using test socket



(8)标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced



(9)警示牌 Warning board



工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type (Universal)



JUT1-35B

|                                      |                              |
|--------------------------------------|------------------------------|
| 厚 / 宽 / 高 / 高                        | 15.2/56/52/57                |
| Thickness/Width / Height/ Height     |                              |
| 刚性导线 (mm²) / 柔性导线 (mm²) / U          |                              |
| Rigid cable / Soft cable / (A) / (V) |                              |
| AWG: 18-0                            | 0.75-35 / 0.75-35 / 25 / 800 |
| IEC 60947-7-1                        |                              |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-35B 5 574 110

封闭型外壳，不用端板。  
Sealed outer-case, don't need end plate

JFB2-35 5 585 162

JFB3-35 5 585 163

JEB10-35 5 582 150

JS-K 8 751 102


PSB6/5/6 8 573 103

PS 5 553 102

ZB10 8 868 105

JW15 8 867 106

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )

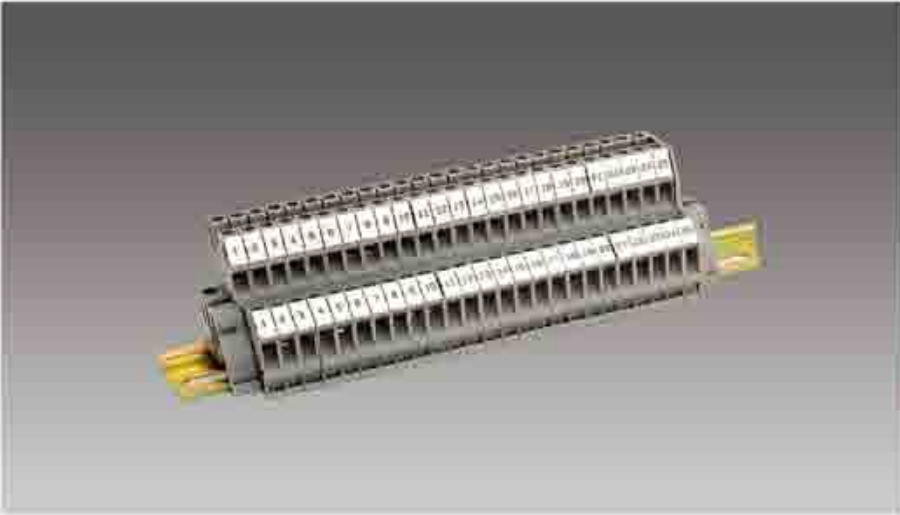

JUT1双层接线端子。具有通用端子在相同的空间位置上两倍的接线容量，其上下两层在位置上错开了2.5mm的空间，不仅在视觉上条理分明，同时在上层接线的情况下，螺丝刀能在下层区域内很方便的完成接线作业。

JUT1 double-layer wiring terminal: it owns twice wiring capacity of universal terminal at the same space position, its upper-lower two storey has 2.5 mm space staggered, therefore, not only is the visual angle clear, but also the screwdriver can simply finish wiring operation at lower space in case of being connected in upper levels.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 型，或NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

|                                                                                                                                                                                                                                             |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| (1)端板 End plate                                                                                                                                                                                                                             |  |
| (2)中心紧固件：用于端子中央，实现横穿连接，螺钉头带绝缘环，可分 2-位、3-位、5-位、10-位。<br>Central adaptor focused at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into 2-digit, 3-digit, 5-digit and 10-digit |  |
| (3)边插式取格件：全绝缘2位、全绝缘3位、全绝缘10位。<br>Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.                                                                                                         |  |
| 横跨连接格件：10位，可分，带10枚螺钉，可形成超过某些端子的跨接。<br>Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals                                                                                  |  |
| 绝缘隔板：用于相邻格件的电气隔离，可事后插入，不占导轨任何空间。<br>Insulating spacer for electric separation of two neighboring adaptors, they may be inserted afterwards, and not occupy any space of track                                                               |  |
| (6)补偿端板：与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。<br>Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm                                                                            |  |
| (7)补偿盖板：与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。<br>Compensation header when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm                                                                             |  |
| (8)标记条：有横向和纵向两种字体，10位。<br>Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced                                                                                                                             |  |
| (9)警示牌 Warning board                                                                                                                                                                                                                        |  |

|                                                                   |
|-------------------------------------------------------------------|
|                                                                   |
| <b>JUT1-2.5/2</b><br>双层接线端子Double-layer type wiring terminal      |
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                   |
| 5.2/56/62/67                                                      |
| 刚性导线 (mm²)   柔性导线 (mm²)   U<br>Rigid cable   Soft cable   (A) (V) |
| AWG 24-12   0.2-4   0.2-2.5   32   500                            |
| IEC 60947-7-1                                                     |
| 型号 Model                                                          |
| 订货号 Order Number                                                  |

|               |           |
|---------------|-----------|
| JUT1-2.5/2    | 5 574 125 |
| G-JUT1-2.5/4  | 8 050 104 |
| JFBN10-2.5    | 5 585 180 |
| JEB2-2.5      | 5 582 102 |
| JEB3-2.5      | 5 582 103 |
| JEB10-2.5     | 5 582 100 |
| JBI10-2.5     | 5 584 101 |
| JS-KK3        | 8 751 101 |
| DG-JUT1-2.5/4 | 8 053 101 |
| DP-JUT1-2.5/4 | 8 053 102 |
| ZB5           | 8 868 102 |
| JWS5          | 8 867 110 |

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )

|                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                               |                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
|                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                            |                  |
| <b>JUT1-2.5/2L</b><br>双层互连接线端子 Double-layer interconnection terminal                                                                                                                                                                                                                                                                                                                          | <b>JUT1-4/2</b><br>双层接线端子 Double-layer type wiring terminal                                                                                                                                                                                                                                                                                                                                   | <b>JUT1-4/2L</b><br>双层互连接线端子 Double-layer interconnection terminal                                                                                                                                                                                                                                                                                                                            |                  |
| 厚 / 宽  高 /  高<br>Thickness/Width  Height/  Height | 厚 / 宽  高 /  高<br>Thickness/Width  Height/  Height | 厚 / 宽  高 /  高<br>Thickness/Width  Height/  Height |                  |
| 5.2/56/62/67                                                                                                                                                                                                                                                                                                                                                                                  | 6.2/56/62/67                                                                                                                                                                                                                                                                                                                                                                                  | 6.2/56/62/67                                                                                                                                                                                                                                                                                                                                                                                  |                  |
| 刚性导线 (mm²)   柔性导线 (mm²)   U<br>Rigid cable   Soft cable   (A) (V)                                                                                                                                                                                                                                                                                                                             | 刚性导线 (mm²)   柔性导线 (mm²)   U<br>Rigid cable   Soft cable   (A) (V)                                                                                                                                                                                                                                                                                                                             | 刚性导线 (mm²)   柔性导线 (mm²)   U<br>Rigid cable   Soft cable   (A) (V)                                                                                                                                                                                                                                                                                                                             |                  |
| AWG 24-12   0.2-4   0.2-2.5   32   500                                                                                                                                                                                                                                                                                                                                                        | AWG 24-12   0.2-4   0.2-4   32   500                                                                                                                                                                                                                                                                                                                                                          | AWG 24-12   0.2-4   0.2-4   32   500                                                                                                                                                                                                                                                                                                                                                          |                  |
| IEC 60947-7-1                                                                                                                                                                                                                                                                                                                                                                                 | IEC 60947-7-1                                                                                                                                                                                                                                                                                                                                                                                 | IEC 60947-7-1                                                                                                                                                                                                                                                                                                                                                                                 |                  |
| 型号 Model                                                                                                                                                                                                                                                                                                                                                                                      | 订货号 Order Number                                                                                                                                                                                                                                                                                                                                                                              | 型号 Model                                                                                                                                                                                                                                                                                                                                                                                      | 订货号 Order Number |

|               |           |               |           |               |            |
|---------------|-----------|---------------|-----------|---------------|------------|
| JUT1-2.5/2L   | 5 574 161 | JUT1-4/2      | 5 574 126 | JUT1-4/2L     | 5 574 126L |
| G-JUT1-2.5/4  | 8 050 104 | G-JUT1-2.5/4  | 8 050 104 | G-JUT1-2.5/4  | 8 050 104  |
| JFBN10-2.5    | 5 585 180 | JFB10-4       | 5 585 120 | JFB10-4       | 5 585 120  |
| JEB2-2.5      | 5 582 102 | JEB2-4        | 5 582 112 | JEB2-4        | 5 582 112  |
| JEB3-2.5      | 5 582 103 | JEB3-4        | 5 582 113 | JEB3-4        | 5 582 113  |
| JEB10-2.5     | 5 582 100 | JEB10-4       | 5 582 110 | JEB10-4       | 5 582 110  |
| JBI10-2.5     | 5 584 101 | JBI10-4       | 5 584 100 | JBI10-4       | 5 584 100  |
| JS-KK3        | 8 751 101 | JS-KK3        | 8 751 101 | JS-KK3        | 8 751 101  |
| DG-JUT1-2.5/4 | 8 053 101 | DG-JUT1-2.5/4 | 8 053 101 | DG-JUT1-2.5/4 | 8 053 101  |
| DP-JUT1-2.5/4 | 8 053 102 | DP-JUT1-2.5/4 | 8 053 102 | DP-JUT1-2.5/4 | 8 053 102  |
| ZB5           | 8 868 102 | ZB6           | 8 868 103 | ZB6           | 8 868 103  |
| JWS5          | 8 867 110 | JWS6          | 8 867 111 | JWS6          | 8 867 111  |



**JUT1-2.5/2Q**  
上下层均可桥接 Could bridge-connected at upper or lower layer

|                                         |                 |
|-----------------------------------------|-----------------|
| 厚/宽/高/间距<br>Thickness/Width/Height/Spac | 5.2/6.7/6.2/6.7 |
| 刚性导线 (mm²)<br>Rigid cable               | 0.2-4           |
| 柔性导线 (mm²)<br>Soft cable                | 0.2-2.5         |
| U (A) (V)                               | 32 500          |
| IEC 60947-7-1                           |                 |

**JUT1-4/2Q**  
上下层均可桥接 Could bridge-connected at upper or lower layer

|                                         |                 |
|-----------------------------------------|-----------------|
| 厚/宽/高/间距<br>Thickness/Width/Height/Spac | 6.2/6.7/6.2/6.7 |
| 刚性导线 (mm²)<br>Rigid cable               | 0.2-4           |
| 柔性导线 (mm²)<br>Soft cable                | 0.2-4           |
| U (A) (V)                               | 32 500          |
| IEC 60947-7-1                           |                 |

#### 说明 Specification 简图 Schematic Drawing

端子，带通用安装在NS32型，或NS35型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks: NS32 or NS35.

(1)端板 End plate




(2)中心连接件，用于端子中央，实现横向桥接，螺钉头带绝缘圈，可分 2-位、3-位、5-位、10-位。  
Central adaptor, used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into 2-digit, 3-digit, 5-digit, and 10-digit.



(3)边插式连接件，全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor, Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.



跨接连接件，10位，可分，带10枚螺钉，可形成通过某些端子的跨接。  
Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals.



绝缘垫片，用于相邻连接件的电气隔离，可事后插入，不占导轨任何空间。  
Insulating spacer, for electric separation of two neighboring adaptors, they may be inserted afterwards, and not occupy any space of track.




(6)补偿端板，与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。  
Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm.



(7)补偿端板，与普通端子相邻排列时，用来抵消层间错位，厚2.5mm。  
Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm.



(8)标记条，有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(9)警示牌 Warning board



#### 型号 Model 订货号 Order Number

JUT1-2.5/2Q 5 574 163

G-JUT1-2.5/4Q 8 050 163

JFBN10-2.5 5 585 180

JEB2-2.5 5 582 102

JEB3-2.5 5 582 103

JEB10-2.5 5 582 100

JB110-2.5 5 584 101

JS-KK3 8 751 101

DP-JUT1-2.5/4Q 8 053 165

ZB5 8 868 102

JWS5 8 867 110

#### 型号 Model 订货号 Order Number

JUT1-4/2Q 5 574 165

G-JUT1-2.5/4Q 8 050 163

JFB10-4 5 585 120

JEB2-4 5 582 112

JEB3-4 5 582 113

JEB10-4 5 582 110

JB110-4 5 584 100

JS-KK3 8 751 101

DP-JUT1-2.5/4Q 8 053 165

ZB6 8 868 103

JWS6 8 867 111

## 应用领域广泛... 应用经验丰富...



### 汽车制造业

汽车工业中连续生产线上所使用的生产设备都很重要。UTL产品为设备提供了可靠性。无螺钉连接技术可以应付特殊车辆所提出的苛刻要求。如航装式接线端子、端子排、MCS多用途连接器系列在汽车制造行业中具有非常高的可应用性：如用在冲压、车架、制造、组装以及喷漆车间的开关控制柜中。抗振动、免维护的簧式弹簧连接技术可节省双倍费用；布线时节约大量时间；同时免去定时的维护工作。

### 机械设备

制造机械设备常常是用于出口，并且在设备到达后短期内就要运行起来。经过长时间的运输过程后，这些机械设备必须能马上投入使用而不必花费时间和精力去检查接线是否松动。

### 楼宇自动化

现代和创新的楼宇技术要求在费用、灵活性以及拓展方面能够有更多的空间。快速、灵活、免维修等特性是一个项目成功实施和运转的关键。

- UTL适用于楼宇自动化中的终端式连接，是专业安装过程中的即插即用式解决方案。
- UTL用于建筑物布线的紧凑型轨装式接线端子。
- UTL建筑物电气安装用连接器，是建筑物布线领域的经典产品。接线盒用导线连接器和照明器具用连接器保证了快速、可靠的连接。

### 过程控制

过程和工程设备需要具备极高的灵活性、实用性及安全可靠。组件若在爆炸危险领域应用就必须通过相关认证。设备的安置也要灵活，这样才能满足不同的应用要求。使用UTL产品可以确保系统的安全可靠。

### 电力应用

发电行业的主要目的就是对企业和个人家庭进行可靠、稳定的供电。而UTL产品可以为此提供非常高质量保证和安全保障。在日益激烈的行业竞争中，经济因素在决策过程中扮演角色日益重要的角色。快速安装、免维护和可靠性，UTL都可以做到。在数十年的设备运行过程中都能维持绝对的可靠性。耐久性，且便于维护，这是各种应用环境中对连接器产品的最高要求。此外，在户外环境中通过配电柜可以抵御气候带来的影响。

### 交通

各种领域的交通设备都有着共同的特点：极度的环境影响着元器件的应用。对于客车车辆应用，元件使用环境温度一般都在-40℃到+85℃；对于船舶应用，元件要承受强烈的震动；而在电梯应用中，大量的超载也对元件产生强烈的震动冲击。在很多情况下，这些不良影响会一起发生。但交通设备不能因为接线端子松动这样的小问题而给乘客造成不便，如导致延误或被困电梯等事故。

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



二进三出接线端子，是为了将两根或更多的导线接到一个组合端子上以解决线路中的电位分路。端子中央有两个桥接孔，通过它们将不同的电位分配到不同的端子上。

二进二出接地端子采用黄绿色封闭外壳，与JUT1-4/2-2配套使用。

一进二出接线端子，用来完成电位分配任务。它在电控柜内部接线侧有两个各自独立的接线位，另一侧入线位轮廓与JUT1-10轮廓相同。

一进二出接地端子采用黄绿色封闭外壳，与JUT1-4/1-2配套使用。

Two-in two-out wiring terminal: it is used to connect two or more leads into one composite terminal to realize distribution of electric potential in wire. There are two bridging holes at the center of terminal, through which different electric potential could be distributed to different terminals.

Two-in two-out landing terminal adopts yellow/green sealed outer case, and it could conduct supporting-use with JUT1-4/2-2.

One-in two-out wiring terminal: it is used to complete potential-distribution operation, there are two separate wiring positions at wiring side of internal electrical-control cupboard, the wire-in position of other side is same as JUT1-10 outline.

One-in two-out landing terminal adopts yellow/green sealed outer case, and it could conduct supporting-use with JUT1-4/1-2.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 C型，或NS35 L型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 C or NS35 L.

(1) 端板：End plate

(2) 中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘罩，可分：2-位，3-位，5-位，10-位。  
Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into: 2-digit, 3-digit, 5-digit and 10-digit.

(3) 边插式联络件：全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.

(4) 跨接联络件：10位，可分：带10枚螺钉，可形成跳过某些端子的跨接。  
Cross connection adaptor in 10 digit it, detachable, with 10 screws, for cross connection by overleaping some terminals.

(5) 绝缘隔板：用于相邻联络件的电气隔离，可事后插入，不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.

(6) 测试插座：与测试插头形成测试连接。  
Test socket: to form a testing connection by using test plug.

(7) 测试插头：与测试插座形成测试连接。  
Test plug: to form a testing connection by using test socket.

(8) 标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



JUT1-4/2-2  
二进二出接线端子 Two-in two-out wiring terminal

|                                   |                  |       |        |
|-----------------------------------|------------------|-------|--------|
| 厚/宽 □ 高/□ 高                       | 6.2/6.3/5.47/5.2 |       |        |
| Thickness/Width □ Height/□ Height |                  |       |        |
| 刚性导线 (mm²)                        | 柔性导线 (mm²)       | I     | U      |
| Rigid cable                       | Soft cable       | (A)   | (V)    |
| AWG:24-12                         | 0.2-4            | 0.2-4 | 32 690 |
| IEC 60947-7-1                     |                  |       |        |

型号 Model 订货号 Order Number

JUT1-4/2-2 5 574 127

G-JUT1-4/2-2 8 050 105

JFB10-4 5 585 120

JEB2-4 5 582 112

JEB3-4 5 582 113

JEB10-4 5 582 110

JBI10-4 5 584 100

JS-KK3 8 751 101

PSB3/10/4 8 573 101

MPS 5 553 101

ZB6 8 868 103

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type ( Universal )



JUT1-4/1-2  
一进二出接线端子 One-in two-out wiring terminal

|                        |                  |       |        |
|------------------------|------------------|-------|--------|
| 厚/宽/高                  | 6.2/5.0/5.47/5.2 |       |        |
| Thickness/Width/Height |                  |       |        |
| 刚性导线 (mm²)             | 柔性导线 (mm²)       | I     | U      |
| Rigid cable            | Soft cable       | (A)   | (V)    |
| AWG:24-12              | 0.2-4            | 0.2-4 | 32 500 |
| IEC 60947-7-1          |                  |       |        |

型号 Model 订货号 Order Number

JUT1-4/1-2 5 574 128

G-JUT1-4/1-2 8 050 106

JFB10-4 5 585 120

JEB2-4 5 582 112

JEB3-4 5 582 113

JEB10-4 5 582 110

JBI10-4 5 584 100


JS-K 8 751 102

PSB3/10/4 8 573 101

MPS 5 553 101

ZB6 8 868 103

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type (Universal)

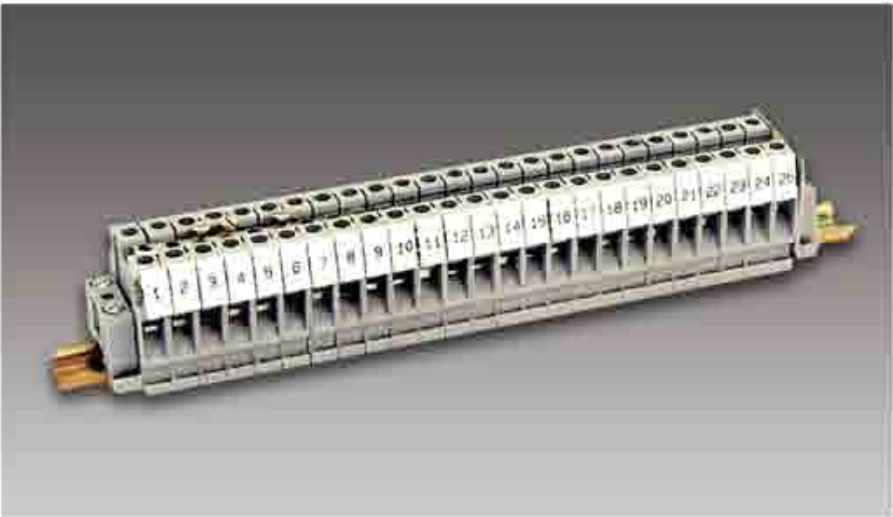

实现小型化是端子发展的必然趋势，MBK小型端子的特点是结构紧凑，可以很方便地实现空间、电流与截面的最优组合。

The miniaturization is doomed to be the development trend of terminal. MBK miniature terminal owns characteristics of compact structure, which would realize simply the best combination of space, current and section.

说明 Specification 简图 Schematic Drawing

端子：可安装在NS15 5.5型导轨上。  
Terminal: can be installed on tracks: NS15 5.5 type

(1)端板 End plate



(2)中心联络件：用于端子中央，实现横向桥接，螺钉头带绝缘罩，可分：2-位、3-位、5-位、10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is divided into 2-digit, 3-digit, 5-digit and 10-digit.



(3)边插式联络件：全绝缘2位、全绝缘3位、全绝缘10位。  
Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.



(4)跨接联络件：10位，可分，带10枚螺钉，可形成跳过某些端子的跨接。  
Cross connection adaptor in 10 digit is detachable, with 10 screws, for cross connection by overlapping some terminals.



(5)绝缘隔板：用于相邻联络件的电气隔离，可事后插入，不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(6)分组薄片：用于端子组间的视觉及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(7)测试插座：与测试插头形成测试连接。  
Test socket: to form a testing connection by using test plug.



(8)标记条：有横向往来两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(9)终端固定件：标记夹和标记条可卡在上边进行标识，另对端子排终端起固定件作用(JUT2系列通用)。  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT2 series).



(10)安装轨(NS15/5.5)  
Installation track (NS15/5.5)



JUT1-2.5E

|                                    |                            |
|------------------------------------|----------------------------|
| 厚/宽/高                              | 5.2/28/32                  |
| Thickness/Width/Height             |                            |
| 刚性导线 (mm²)   柔性导线 (mm²)   U        |                            |
| Rigid cable   Soft cable   (A) (V) |                            |
| AWG: 24-12                         | 0.2-4   0.2-2.5   32   500 |
| IEC 60947-7-1                      |                            |

型号 Model 订货号 Order Number

JUT1-2.5E 5 574 151

G-JUT1-2.5/4E 8 050 151

JFB10-2.5 5 585 110

JEB2-2.5 5 582 102

JEB3-2.5 5 582 103

JEB10-2.5 5 582 100

JS-KK3 8 751 101

JAP-E 8 750 151

PSB3/10/14 8 573 101

ZB5 8 868 102

E/1E 5 103 007

NS15/5.5 8 024 003

工业配电接线端子-螺钉类 (通用型)  
Industrial Distribution Terminal Blocks – Screw type (Universal)



JUT1-4E

|                                    |                          |
|------------------------------------|--------------------------|
| 厚/宽/高                              | 6.2/28/32                |
| Thickness/Width/Height             |                          |
| 刚性导线 (mm²)   柔性导线 (mm²)   U        |                          |
| Rigid cable   Soft cable   (A) (V) |                          |
| AWG: 24-10                         | 0.2-6   0.2-4   41   500 |
| IEC 60947-7-1                      |                          |

型号 Model 订货号 Order Number

JUT1-4E 5 574 152

G-JUT1-2.5/4E 8 050 151

JFB10-4 5 585 120

JEB2-4 5 582 112

JEB3-4 5 582 113

JEB10-4 5 582 110

JS-KK3 8 751 101

JAP-E 8 750 151

PSB3/10/14 8 573 101

ZB6 8 868 103

E/1E 5 103 007

NS15/5.5 8 024 003



JUT1-6E (开发中)

|                                    |                           |
|------------------------------------|---------------------------|
| 厚/宽/高                              | 5.2/32/36                 |
| Thickness/Width/Height             |                           |
| 刚性导线 (mm²)   柔性导线 (mm²)   U        |                           |
| Rigid cable   Soft cable   (A) (V) |                           |
| AWG: 24-10                         | 0.5-10   0.5-6   57   500 |
| IEC 60947-7-1                      |                           |

型号 Model 订货号 Order Number

JUT1-6E 5 574 153

G-JUT1-6E 8 050 153

JFB10-6 5 585 130

JEB2-6 5 582 122

JEB3-6 5 582 123

JEB10-6 5 582 120

JBI10-6

JS-KK3 8 751 101

JAP-E 8 750 151

PSB4/7/6 8 573 102

ZB8 8 868 104

E/1E 5 103 007

NS15/5.5 8 024 003

螺钉类-接地端子 (通用型)  
Screw type - ground terminal (Universal)



JUT1-1.5PE

|                 |            |          |                |
|-----------------|------------|----------|----------------|
| 厚/宽             | 高          | 高        | 4.2/42.5/42/47 |
| Thickness/Width | Height     | Height   |                |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)      |                |
| Rigid cable     | Soft cable | (A)      |                |
| AWG:26-18       | 0.14-1.5   | 0.14-1.5 | 17.5           |
| IEC 60947-7-1   |            |          |                |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-1.5PE 5 574 114

ZB4 8 868 101



JUT1-6PE

|                 |            |        |                |
|-----------------|------------|--------|----------------|
| 厚/宽             | 高          | 高      | 8.2/42.5/47/52 |
| Thickness/Width | Height     | Height |                |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)    |                |
| Rigid cable     | Soft cable | (A)    |                |
| AWG:24-6        | 0.2-10     | 0.2-6  | 57             |
| IEC 60947-7-1   |            |        |                |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-6PE 5 574 118

JEB2-6 5 582 122  
JEB3-6 5 582 123  
JEB10-6 5 582 120

ZB8 8 868 104

JUT1通用型接地端子系列产品主要用于接地功能，或接零功能，具有相应规格接线端子的电流承载能力。其低接触电阻，防腐蚀连接点，黄绿标志均能满足有关技术标准的规定。


JUT1 universal landing terminal terminal series product is mainly for landing or connecting to neutral, it possesses current load capability of corresponding specification wiring terminal. Its low-connection resistance, anti-corrosion connection point and yellow/green mark all can meet the regulated demand of relative technical standard.

说明 Specification 简图 Schematic Drawing

接地端子，带黄绿绝缘外壳可安装在NS32型，或NS35型导轨上。  
Landing terminal with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1) 边插式连接件：全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.

(2) 标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



螺钉类-接地端子 (通用型)  
Screw type - ground terminal (Universal)



JUT1-2.5B/PE

|                 |            |         |                |
|-----------------|------------|---------|----------------|
| 厚/宽             | 高          | 高       | 6.2/42.5/42/47 |
| Thickness/Width | Height     | Height  |                |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)     |                |
| Rigid cable     | Soft cable | (A)     |                |
| AWG:24-12       | 0.2-4      | 0.2-2.5 | 32             |
| IEC 60947-7-1   |            |         |                |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-2.5B/PE 5 574 115

JEB2-4 5 582 112  
JEB3-4 5 582 113  
JEB10-4 5 582 110

ZB6 8 868 103



JUT1-2.5PE

|                 |            |         |                |
|-----------------|------------|---------|----------------|
| 厚/宽             | 高          | 高       | 5.2/42.5/47/52 |
| Thickness/Width | Height     | Height  |                |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)     |                |
| Rigid cable     | Soft cable | (A)     |                |
| AWG:24-12       | 0.2-4      | 0.2-2.5 | 32             |
| IEC 60947-7-1   |            |         |                |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-2.5PE 5 574 116

JEB2-2.5 5 582 102  
JEB3-2.5 5 582 103  
JEB10-2.5 5 582 100

ZB5 8 868 102



JUT1-4PE

|                 |            |        |                |
|-----------------|------------|--------|----------------|
| 厚/宽             | 高          | 高      | 6.2/42.5/47/52 |
| Thickness/Width | Height     | Height |                |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)    |                |
| Rigid cable     | Soft cable | (A)    |                |
| AWG:24-10       | 0.2-6      | 0.2-4  | 41             |
| IEC 60947-7-1   |            |        |                |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-4PE 5 574 117

JEB2-4 5 582 112  
JEB3-4 5 582 113  
JEB10-4 5 582 110

ZB6 8 868 103



JUT1-10PE

|                 |            |        |                 |
|-----------------|------------|--------|-----------------|
| 厚/宽             | 高          | 高      | 10.2/42.5/47/52 |
| Thickness/Width | Height     | Height |                 |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)    |                 |
| Rigid cable     | Soft cable | (A)    |                 |
| AWG:20-6        | 0.5-16     | 0.5-10 | 76              |
| IEC 60947-7-1   |            |        |                 |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-10PE 5 574 119

JEB2-10 5 582 132  
JEB3-10 5 582 133  
JEB10-10 5 582 130

ZB10 8 868 105



JUT1-16PE

|                 |            |        |                 |
|-----------------|------------|--------|-----------------|
| 厚/宽             | 高          | 高      | 12.2/42.5/54/59 |
| Thickness/Width | Height     | Height |                 |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)    |                 |
| Rigid cable     | Soft cable | (A)    |                 |
| AWG:12-4        | 2.5-25     | 4-16   | 101             |
| IEC 60947-7-1   |            |        |                 |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-16PE 5 574 120

JEB10-16 5 582 140

ZB10 8 868 105



JUT1-35PE

|                 |            |         |               |
|-----------------|------------|---------|---------------|
| 厚/宽             | 高          | 高       | 15.2/50/62/67 |
| Thickness/Width | Height     | Height  |               |
| 刚性导线 (mm²)      | 柔性导线 (mm²) | (A)     |               |
| Rigid cable     | Soft cable | (A)     |               |
| AWG:18-0        | 0.75-50    | 0.75-35 | 150           |
| IEC 60947-7-1   |            |         |               |

|          |                  |
|----------|------------------|
| 型号 Model | 订货号 Order Number |
|----------|------------------|

JUT1-35PE 5 574 122

JEB10-35 5 582 150

ZB10 8 868 105

螺钉类-接地端子 (通用型)  
Screw type - ground terminal (Universal)



说明 Specification 简图 Schematic Drawing

接地端子，带黄绿绝缘外壳可安装在NS32 型，或NS36 型导轨上。  
Landing terminal with yellow/green insulation outer-case, it can be installed in the NS32 type or NS36 type track.

(1) 边插式联器件：全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.

| JUT1-50PE                                                       |                      |
|-----------------------------------------------------------------|----------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 20.2/71.3/77.4/82.70 |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 16-50   25-50   150  |
| IEC 60947-7-1                                                   |                      |
| 型号 Model                                                        | 订货号 Order Number     |
| JUT1-50PE                                                       | 5 574 124            |

| JUT1-2.5E/PE                                                    |                      |
|-----------------------------------------------------------------|----------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 5.2/28/32            |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 0.2-4   0.2-2.5   32 |
| IEC 60947-7-1                                                   |                      |
| 型号 Model                                                        | 订货号 Order Number     |
| JUT1-2.5E/PE                                                    | 5 574 154            |

(2) 标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



| JUT1-4/2-2PE                                                    |                    |
|-----------------------------------------------------------------|--------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 6.2/63.5/47/52     |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 0.2-4   0.2-4   32 |
| IEC 60947-7-1                                                   |                    |
| 型号 Model                                                        | 订货号 Order Number   |
| JUT1-4/2-2PE                                                    | 5 574 173          |

| JUT1-4/1-2PE(开发中)                                               |                    |
|-----------------------------------------------------------------|--------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 6.2/50.5/47/52     |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 0.2-4   0.2-4   32 |
| IEC 60947-7-1                                                   |                    |
| 型号 Model                                                        | 订货号 Order Number   |
| JUT1-4/2-2PE                                                    | 5 574 174          |

说明 Specification 简图 Schematic Drawing

接地端子，带黄绿绝缘外壳可安装在NS32 型，或NS36 型导轨上。  
Landing terminal with yellow/green insulation outer-case, it can be installed in the NS32 type or NS36 type track.

(1) 边插式联器件：全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor: Full insulation in 2 digit, Full insulation in 3 digit, Full insulation in 10 digit.

(2) 标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.

|                    |           |
|--------------------|-----------|
| ZB6                | 8 868 103 |
| 标记条<br>Mark bar    |           |
| JEB2-4             | 5 582 112 |
| JEB3-4             | 5 582 113 |
| JEB10-4            | 5 582 110 |
| 边插式联器件Side adaptor |           |

|                    |           |
|--------------------|-----------|
| ZB6                | 8 868 103 |
| 标记条<br>Mark bar    |           |
| JEB2-4             | 5 582 112 |
| JEB3-4             | 5 582 113 |
| JEB10-4            | 5 582 110 |
| 边插式联器件Side adaptor |           |

螺钉类-接地端子 (通用型)  
Screw type - ground terminal (Universal)




| JUT1-4E/PE(开发中)                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 6.2/28/32            |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 0.2-4   0.2-2.5   32 |
| IEC 60947-7-1                                                   |                      |
| 型号 Model                                                        | 订货号 Order Number     |
| JUT1-4E/PE                                                      | 5 574 155            |

| JUT1-6E/PE(开发中)                                                 |                     |
|-----------------------------------------------------------------|---------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 8.2/35/36           |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 0.5-10   0.5-6   32 |
| IEC 60947-7-1                                                   |                     |
| 型号 Model                                                        | 订货号 Order Number    |
| JUT1-6E/PE                                                      | 5 574 156           |

可安装在NS15 型导轨上  
can be installed on tracks NS15 type

可安装在NS15 型导轨上  
can be installed on tracks NS15 type

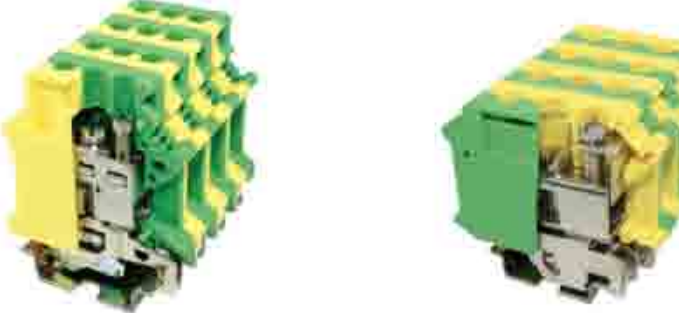

| JUT1-16B/PE                                                     |                     |
|-----------------------------------------------------------------|---------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 12.2/42.5/47/52     |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 2.5-25   4-16   101 |
| IEC 60947-7-1                                                   |                     |
| 型号 Model                                                        | 订货号 Order Number    |
| JUT1-16B/PE                                                     | 5 574 121           |

| JUT1-35B/PE                                                     |                         |
|-----------------------------------------------------------------|-------------------------|
| 厚/宽/高/总高<br>Thickness/Width/Height/Total Height                 | 15.2/55/51/56           |
| 刚性导线 (mm²)   柔性导线 (mm²)   (A)<br>Rigid cable   Soft cable   (A) | 0.75-35   0.75-35   125 |
| IEC 60947-7-1                                                   |                         |
| 型号 Model                                                        | 订货号 Order Number        |
| JUT1-35B/PE                                                     | 5 574 123               |


|          |           |
|----------|-----------|
| JEB10-16 | 5 582 140 |
| ZB10     | 8 868 105 |

|          |           |
|----------|-----------|
| JEB10-35 | 5 582 150 |
| ZB10     | 8 868 105 |

封闭型外壳，不用端板。  
Sealed outer-case, don't need end plate

封闭型外壳，不用端板。  
Sealed outer-case, don't need end plate

工业配电接线端子-螺钉类 (组合型)  
Industrial Distribution Terminal Blocks – Screw type ( combination type )

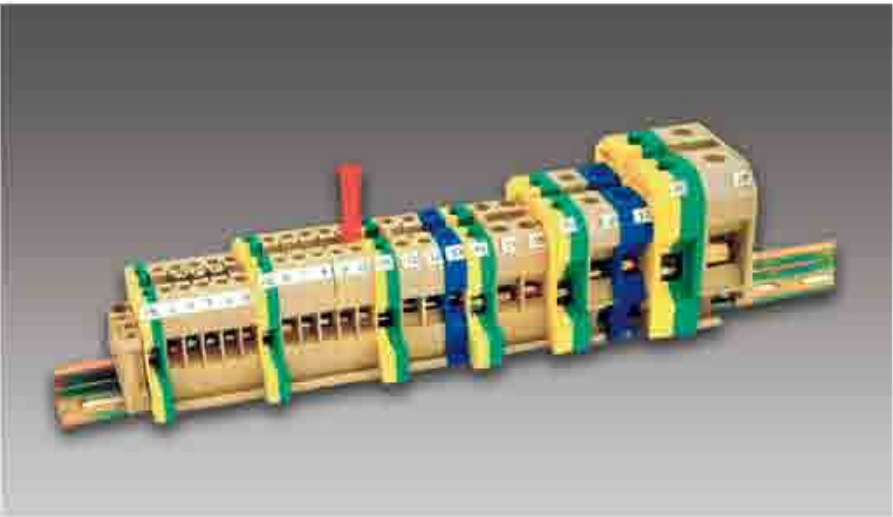

JUT2组合型接线端子系列产品具备下列实用特征:  
端子具有通用安装脚能方便快速的安装在U型导轨NS35及G型导轨NS32上。

封闭型的螺钉引孔即方便螺丝刀操作,又可防止螺丝旋松后跌落机外。

对多个截面的端子配备了通用附件,如:端板、分組隔板、垫片等。

绝缘外壳采用机械强度高,电气特性好,弹性最佳的进口工程塑料-聚酰胺(尼龙)66。

顶部二端采用白色标识系列,可实现统一标识。

JUT2 combination-type wiring terminal series product owns following practical properties  
Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS 35 and G shaped track NS 32.

Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out.

General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections.

The insulating shell is made of imported engineering plastic-polyamide(Nylon)66, which is of high mechanical intensity, good electric property, and super flexibility.

Two ends on the top with white marking system to realize uniformed sign.

说明 Specification 简图 Schematic Drawing

端子: 带通用安装在NS32 型、或NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35.

(1)端板 End plate



G-JUT2-2.5 8 050 202

(2)分組隔板: 用于端子组间的视角及电气隔离。  
Insulating spacer: for visual and electric separation between neighboring terminal groups.



TW2.5 8 750 202

(3)绝缘隔片: 用于相邻连接件的电气隔离,可事后插入,不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



TS2.5/35 8 751 202

(4)中心连接件: 用于端子中央,实现横向连接,螺钉头带绝缘隔片,可分: 2-位, 3-位, 5-位, 10-位。  
Center adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is fixed into 2-digit, 3-digit, 5-digit and 10-digit.




JQ2-2.5 5 585 212  
JQ3-2.5 5 585 213  
JQ10-2.5 5 585 210

(5)跨路连接件: 10位,可分,带10枚螺钉,可形成通过某些端子的跨路。  
Cross connection adaptor 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals.



JSQ10-2.5 5 584 202

(6)标识条: 有横向和竖向两种字体, 10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



DEK5 8 868 201

(7)终端固定件: 对端子排终端起固定作用 (JUT2系列通用)  
Terminal fixed component, mark it could be used as fixed component to terminal row's termination (universal for JUT2 series)



E/2 5 103 003

(8)安装轨(NS35/7.5)  
Installment track(NS35/7.5)



NS35/7.5 8 024 001

(9)终端固定件  
Terminal fixed component.



E/4 5 103 005

(10)安装轨(NS35/7.5)  
Installment track(NS35/7.5)



NS32/15 8 025 002

工业配电接线端子-螺钉类 (组合型)  
Industrial Distribution Terminal Blocks – Screw type ( combination type )



| JUT2-4                                                |                          |
|-------------------------------------------------------|--------------------------|
| 厚/宽/高/高<br>Thickness/Width/Height/Height              | 6.5/42/47.5/52           |
| 额定截面Rated section: 4mm²<br>AWG:24-14<br>IEC 60947-7-1 | I U<br>(A) (V)<br>32 800 |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT2-4 5 574 203

G-JUT2-4/10 8 050 203

TW4/10 8 750 203

TS2.5/35 8 751 202

JQ2-4 5 585 222  
JQ3-4 5 585 223  
JQ10-4 5 585 220

JSQ10-4 5 584 203

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

| JUT2-6                                                |                          |
|-------------------------------------------------------|--------------------------|
| 厚/宽/高/高<br>Thickness/Width/Height/Height              | 8/42/47.5/52             |
| 额定截面Rated section: 6mm²<br>AWG:24-10<br>IEC 60947-7-1 | I U<br>(A) (V)<br>41 800 |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT2-6 5 574 204

G-JUT2-4/10 8 050 203

TW4/10 8 750 203

TS2.5/35 8 751 202

JQ2-6 5 585 232  
JQ3-6 5 585 233  
JQ10-6 5 585 230

JSQ10-6 5 584 204

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

| JUT2-10                                               |                          |
|-------------------------------------------------------|--------------------------|
| 厚/宽/高/高<br>Thickness/Width/Height/Height              | 10/42/47.5/52            |
| 额定截面Rated section: 10mm²<br>AWG:20-6<br>IEC 60947-7-1 | I U<br>(A) (V)<br>57 800 |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT2-10 5 574 205

G-JUT2-4/10 8 050 203

TW4/10 8 750 203

TS2.5/35 8 751 202

JQ2-10 5 585 242  
JQ3-10 5 585 243  
JQ10-10 5 585 240

JSQ10-10 5 584 205

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

工业配电接线端子-螺钉类 (组合型)  
Industrial Distribution Terminal Blocks – Screw type ( combination type )



| JUT2-16                                                  |  |               |       | JUT2-35                                                  |  |               |       |
|----------------------------------------------------------|--|---------------|-------|----------------------------------------------------------|--|---------------|-------|
| 厚 / 宽 / 高 / 总高<br>Thickness/Width / Height/ Total Height |  | 12/50/53.5/58 |       | 厚 / 宽 / 高 / 总高<br>Thickness/Width / Height/ Total Height |  | 18/58/63.5/68 |       |
| 额定截面Rated section: 16mm <sup>2</sup>                     |  | I (A)         | U (V) | 额定截面Rated section: 35mm <sup>2</sup>                     |  | I (A)         | U (V) |
| AWG: 12-4<br>IEC 60947-7-1                               |  | 76            | 800   | AWG: 18-0<br>IEC 60947-7-1                               |  | 125           | 800   |

说明 Specification 简图 Schematic Drawing

端子: 带通用安装在NS32 或NS35 型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32 or NS35.

(1) 端板 End plate



(2) 分隔板: 用于端子组间的视觉及电气隔离。  
Insulating spacer: for visual and electric separation between neighboring terminal groups.




(3) 绝缘隔片: 用于相邻规格件的电气隔离, 可事后插入, 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(4) 中心连接件: 用于端子中央, 实现横向桥接, 螺钉头带绝缘帽, 可分: 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is divided into 2-digit, 3-digit, 5-digit and 10-digit.



(5) 跨接连接件: 10位, 可分, 带10枚螺钉, 可形成跨越某些端子的跨接。  
Cross connection adaptor in 10 digit, detachable, with 10 screws, for cross connection by overlapping some terminals.



(6) 标记条: 有横向和竖向两种字体, 10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(7) 终端固定件: 对端子排终端起固定作用 (JUT2系列适用)  
Terminal fixed component: mark it could be used as fixed component to terminal row's termination (universal for JUT2 series)



(8) 安装轨 (NS35/7.5)  
Installment track (NS35/7.5)



(9) 终端固定件  
Terminal fixed component



(10) 安装轨 (NS32/15)  
Installment track (NS32/15)



型号 Model 订货号 Order Number

JUT2-16 5 574 206

G-JUT2-16 8 050 204

TW16 8 750 204

TS2.5/35 8 751 202

JQ2-16 5 585 252

JQ3-16 5 585 253

JQ10-16 5 585 250

JSQ10-16 5 584 206

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

型号 Model 订货号 Order Number

JUT2-35 5 574 207

G-JUT2-35 8 050 205

TW35 8 750 205

TS2.5/35 8 751 202

JQ2-35 5 585 262

JQ3-35 5 585 263

JSQ3-35 5 584 207

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

工业配电接线端子-螺钉类 (组合型)  
Industrial Distribution Terminal Blocks – Screw type ( combination type )



| JUT2-70                                                  |  |          |       | JUT2-4/2<br>双层接线端子 Double-layer wiring terminal |  |         |       | JUT2-4/2L<br>双层互连接线端子 Double-layer interconnection terminal |  |         |       |
|----------------------------------------------------------|--|----------|-------|-------------------------------------------------|--|---------|-------|-------------------------------------------------------------|--|---------|-------|
| 厚 / 宽 / 高 / 总高<br>Thickness/Width / Height/ Total Height |  | 22/75/80 |       | 厚 / 宽 / 高<br>Thickness/Width/Height             |  | 6/54/60 |       | 厚 / 宽 / 高<br>Thickness/Width/Height                         |  | 6/54/60 |       |
| 额定截面Rated section: 70mm <sup>2</sup>                     |  | I (A)    | U (V) | 额定截面Rated section: 4mm <sup>2</sup>             |  | I (A)   | U (V) | 额定截面Rated section: 4mm <sup>2</sup>                         |  | I (A)   | U (V) |
| AWG: 2-0<br>IEC 60947-7-1                                |  | 192      | 800   | AWG: 24-10<br>IEC 60947-7-1                     |  | 32      | 500   | AWG: 24-10<br>IEC 60947-7-1                                 |  | 32      | 500   |

型号 Model 订货号 Order Number

JUT2-70 5 574 208

G-JUT2-70 8 050 206

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

型号 Model 订货号 Order Number

JUT2-4/2 5 574 215

G-JUT2-4/2 8 050 207

JQ2-4/2 5 585 282

JQ3-4/2 5 585 283

JQ10-4/2 5 585 280

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002

型号 Model 订货号 Order Number

JUT2-4/2L 5 574 216

G-JUT2-4/2 8 050 207

JQ2-4/2 5 585 282

JQ3-4/2 5 585 283

JQ10-4/2 5 585 280

DEK5 8 868 201

E/2 5 103 003

NS35/7.5 8 024 001

E/4 5 103 005

NS32/15 8 025 002



**JUT2-2.5E**  
小型接线端子 Miniature wiring terminal series

厚/宽/高  
Thickness/Width/Height 5/22.5/25  
额定截面 Rated section: 2.5mm<sup>2</sup>  
AWG: 24-12 (A) (V)  
IEC 60947-7-1 24 380


说明 Specification 简图 Schematic Drawing

型号 Model 订货号 Order Number

端子: 带通用安装在NS32 型, 或NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35.


JUT2-2.5E 5 574 224

(6) 标记条: 有横向和竖向两种  
字体, 10 位。  
Mark bar: two character  
styles, with horizontal and  
vertical arrangements,  
ten spaced.



说明: 该端子由端子和固定件两部分组成, 结构紧凑, 无须安装轨, 螺栓穿过固定件可直接安装在电气柜的壁上, 而且固定件位置可根据需要放在前后任意位置, 所占空间小, 标记清晰。


Instruction: this terminal is composed of terminal and fixed component, with compact structure and without installment track, the screw bolt could be directly installed onto electrical cupboard's wall through fixed component, moreover, the position of fixed component can be laid anywhere according to demand, and it takes up small space and the mark is clear.



G-JUT2-2.5E  
(固定件型号)  
fixed component type

5 103 224  
(订货号)  
order number

应用领域广泛... 应用经验丰富...

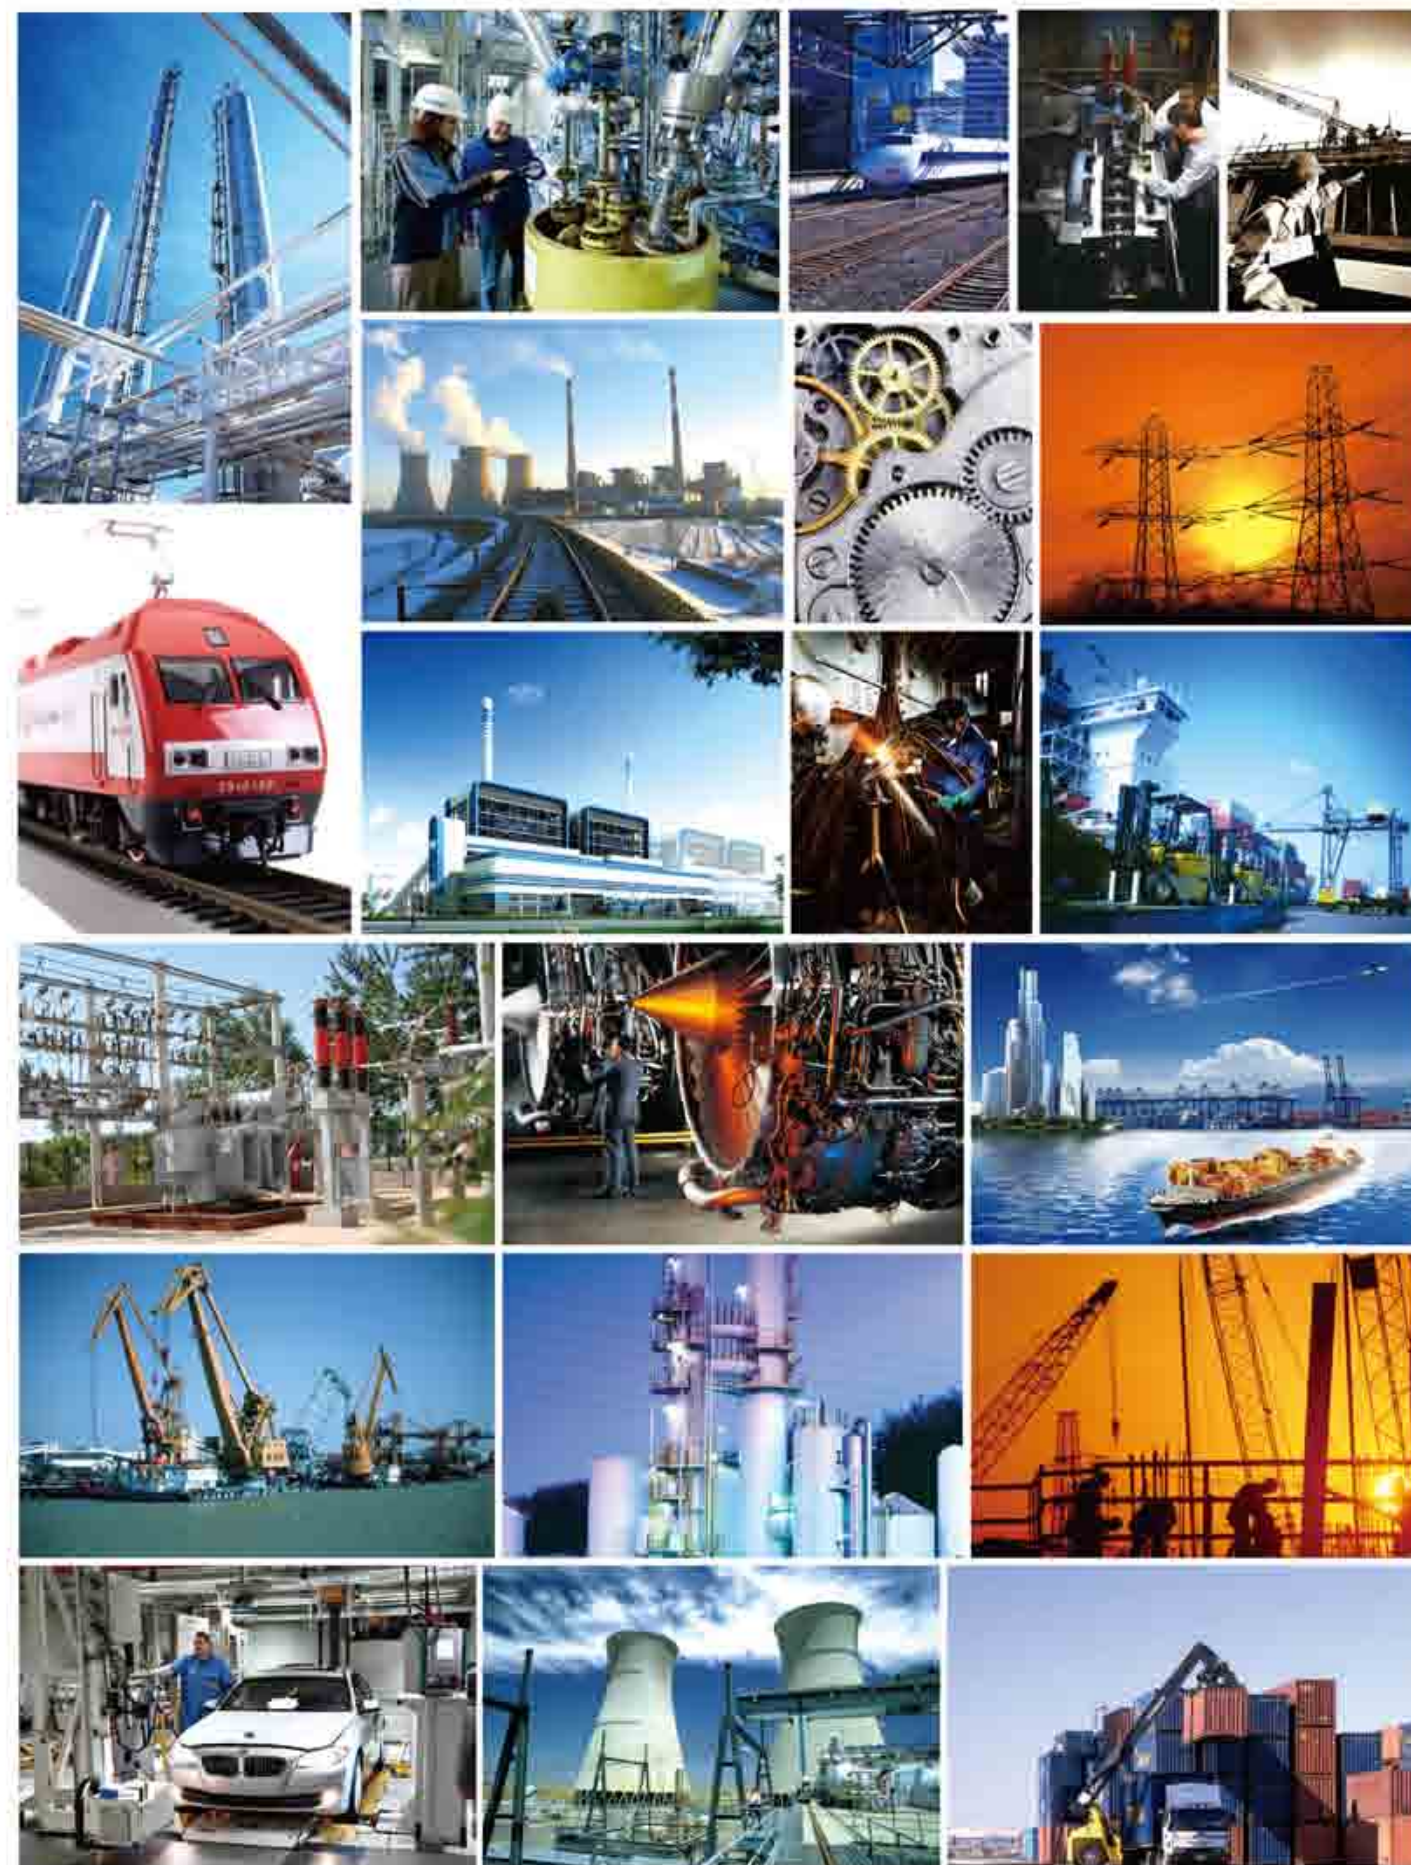

螺钉类-接地端子 (组合型)  
Screw type - ground terminal (Combination type)



| JUT2-2.5PE                          |               |
|-------------------------------------|---------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 6.2/39.1/42.5 |
| 额定截面Rated section: 2.5mm²           | (A)           |
| AWG: 24-12<br>IEC 60947-7-1         | 24            |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|            |           |
|------------|-----------|
| JUT2-2.5PE | 5 574 209 |
|------------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|

JUT2接地型接线端子系列产品主要用于接地功能,或接零功能,具有相应规格接线端子的电流承载能力。

JUT2 landing-type wiring terminal series product is mainly used for landing or connecting to neutral, it owns the same current load capability of the same specification wiring terminal.

说明 Specification 简图 Schematic Drawing

接地端子,可安装在NS36 L型导轨上。  
Terminal can be installed on tracks NS36 L-type

(2)标记条:有横向和竖向两种字体,10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



| JUT2-16PE                           |              |
|-------------------------------------|--------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 12.2/50.3/54 |
| 额定截面Rated section: 16mm²            | (A)          |
| AWG: 12-4<br>IEC 60947-7-1          | 76           |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|


|           |           |
|-----------|-----------|
| JUT2-16PE | 5 574 213 |
|-----------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|

说明 Specification 简图 Schematic Drawing

接地端子,可安装在NS36 L型导轨上。  
Terminal can be installed on tracks NS36 L-type

(2)标记条:有横向和竖向两种字体,10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



螺钉类-接地端子 (组合型)  
Screw type - ground terminal (Combination type)



| JUT2-4PE                            |               |
|-------------------------------------|---------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 6.8/40.3/47.7 |
| 额定截面Rated section: 4mm²             | (A)           |
| AWG: 24-8<br>IEC 60947-7-1          | 32            |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|          |           |
|----------|-----------|
| JUT2-4PE | 5 574 210 |
|----------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|



| JUT2-6PE                            |             |
|-------------------------------------|-------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 8/40.7/47.7 |
| 额定截面Rated section: 6mm²             | (A)         |
| AWG: 24-6<br>IEC 60947-7-1          | 41          |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|          |           |
|----------|-----------|
| JUT2-6PE | 5 574 211 |
|----------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|



| JUT2-10PE                           |              |
|-------------------------------------|--------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 10/40.3/47.7 |
| 额定截面Rated section: 10mm²            | (A)          |
| AWG: 20-6<br>IEC 60947-7-1          | 57           |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|           |           |
|-----------|-----------|
| JUT2-10PE | 5 574 212 |
|-----------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|



| JUT2-35PE                           |            |
|-------------------------------------|------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 18/58/63.5 |
| 额定截面Rated section: 35mm²            | (A)        |
| AWG: 18-0<br>IEC 60947-7-1          | 125        |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|           |           |
|-----------|-----------|
| JUT2-35PE | 5 574 214 |
|-----------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|




| JUT2-70PE                           |            |
|-------------------------------------|------------|
| 厚 / 宽 / 高<br>Thickness/Width/Height | 22/75.5/80 |
| 额定截面Rated section: 70mm²            | (A)        |
| AWG: 2-0<br>IEC 60947-7-1           | 192        |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

|           |           |
|-----------|-----------|
| JUT2-70PE | 5 574 215 |
|-----------|-----------|

|      |           |
|------|-----------|
| DEK5 | 8 868 201 |
|------|-----------|

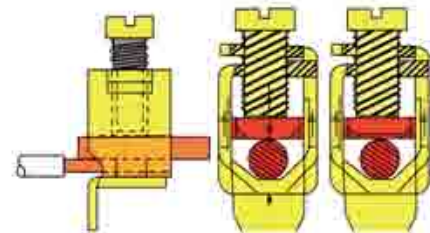

JUT2接线端子系列采用框式接线系统,该系统由压线框、螺钉、导电片组成。压线框是用淬火硬化并经镀锌处理的优质钢板制成,能和谐地配合钢制螺钉将导线牢固的压紧。在拧紧螺钉的过程中,压线框上部带螺纹的舌片上弹起,产生一个对螺钉的反作用,实现自锁功能。通电后由于温升造成的导线直径的改变则由压线框本身的弹性来抵消,因此无需再次拧紧螺钉。

JUT2 wiring terminal series adopts frame-type wiring system, which is composed of wire-pressing frame, screw and electrical conduction slice, of which the wire-pressing frame made of super-quality steel through quenching hardening and galvanization deactivation, so it could be cooperated harmoniously with steel screw to press lead tightly. In the process of tightening screw, the tongue piece with screw line on top of wire-pressing frame would bounce upwards and produce reaction force on screw to realize self-lock function. After being electrified, the lead diameter's change resulting from temperature rising would be offset by wire-pressing frame's elasticity, which doesn't need to tighten screw again.

工业配电接线端子—螺钉类（组合型）  
Screw type – ground terminal（Combination type）



| JUT4-2.5<br>通用型接线端子universal wiring terminal |  |             |          | JUT4-4<br>通用型接线端子universal wiring terminal |  |               |          |
|----------------------------------------------|--|-------------|----------|--------------------------------------------|--|---------------|----------|
| 厚/宽/高<br>Thickness/Width/Height              |  | 7/33.6/44.3 |          | 厚/宽/高<br>Thickness/Width/Height            |  | 6.8/40.5/51.5 |          |
| 额定截面Rated section: 0.5-4mm²                  |  | I<br>(A)    | U<br>(V) | 额定截面Rated section: 0.5-6mm²                |  | I<br>(A)      | U<br>(V) |
| AWG:20-12<br>IEC 60947-7-1                   |  | 25          | 600      | AWG:20-8<br>IEC 60947-7-1                  |  | 36            | 600      |

说明 Specification 简图 Schematic Drawing

接地端子：可安装在NS35型导轨上。  
Terminal can be installed on tracks NS35 type

(1)端板 End plate

(2)分组隔板：用于端子组间的视觉及电气隔离。  
Segment spacer: for visual and electric separation between neighbouring terminal groups

(3)中心连接件：用于端子中央，实现横向桥接。可分：2-位、3-位、5-位、10-位。  
Central adaptor used at the center of terminal for transverse bridge connection, which is divided into 2-digit, 3-digit, 5-digit and 10-digit

(4)测试插座：与测试插头形成测试连接。  
Test socket to form a testing connection by using test plug

(5)测试插头：形成测试连接。  
Test plug to forming test connection

(6)标识牌 Mark bar

(7)终端固定件：对端子排终端起固定作用。  
Terminal fixed component imposing fixed function on terminal row's termination

(8)安装轨( NS32/15-AL)  
Installment track (NS32/15-AL)

| 型号 Model   | 订货号 Order Number |
|------------|------------------|
| JUT4-2.5   | 5 574 401        |
| G-JUT4-2.5 | 8 050 401        |
| PSB3/10/4  | 8 573 101        |
| MPS        | 5 553 101        |
| HZB5       | 8 868 401        |
| E/4        | 5 103 005        |
| NS32/15-AL | 8 025 002        |

| 型号 Model    | 订货号 Order Number |
|-------------|------------------|
| JUT4-4      | 5 574 403        |
| G-JUT4-4/10 | 8 050 402        |
| PSB3/10/4   | 8 573 101        |
| MPS         | 5 553 101        |
| HZB5        | 8 868 401        |
| E/4         | 5 103 005        |
| NS32/15-AL  | 8 025 002        |



| JUT4-2.5T<br>增强型接线端子Strengthened-type wiring terminal                         |                  |
|-------------------------------------------------------------------------------|------------------|
| 型号 Model                                                                      | 订货号 Order Number |
| JUT4-2.5T                                                                     | 5 574 402        |
| 注：附件及参数对应查上表<br>Remarks: attachment and parameter please refer to above form. |                  |



| JUT4-4T<br>增强型接线端子Strengthened-type wiring terminal                           |                  |
|-------------------------------------------------------------------------------|------------------|
| 型号 Model                                                                      | 订货号 Order Number |
| JUT4-4T                                                                       | 5 574 404        |
| 注：附件及参数对应查上表<br>Remarks: attachment and parameter please refer to above form. |                  |

JUT4-T增强型接线端子  
JUT4-T增强型接线端子是在JUT4通用型接线端子的压线框下部增加了一对弹簧，使端子的防震性能增强，接线更牢固。其技术参数和附件与对应的通用型接线端子完全一致。

JUT4-4 strengthened-type wiring terminal has been added one pair of spring at bottom of wire-pressing frame of JUT4 universal wiring terminal, which could strengthen shockproof performance of terminal and make wiring solidier. Its technical parameter and attachment are in accordance to corresponding universal wiring terminal.

工业配电接线端子—螺钉类（组合型）  
Screw type – ground terminal（Combination type）



| JUT4-10<br>通用型接线端子universal wiring terminal |  |                |          | JUT4-35<br>通用型接线端子universal wiring terminal |  |          |          | JUT4-10C<br>增强型接线端子Strengthened-type wiring terminal |  |              |          |
|---------------------------------------------|--|----------------|----------|---------------------------------------------|--|----------|----------|------------------------------------------------------|--|--------------|----------|
| 厚/宽/高<br>Thickness/Width/Height             |  | 10.5/40.5/51.8 |          | 厚/宽/高<br>Thickness/Width/Height             |  | 18/55/83 |          | 厚/宽/高<br>Thickness/Width/Height                      |  | 10/52.7/57.7 |          |
| 额定截面Rated section: 0.5-10mm²                |  | I<br>(A)       | U<br>(V) | 额定截面Rated section: 16-35mm²                 |  | I<br>(A) | U<br>(V) | 额定截面Rated section: 0.5-10mm²                         |  | I<br>(A)     | U<br>(V) |
| AWG:20-8<br>IEC 60947-7-1                   |  | 48             | 600      | AWG:4-2<br>IEC 60947-7-1                    |  | 115      | 600      | AWG:20-8<br>IEC 60947-7-1                            |  | 65           | 600      |

| 型号 Model    | 订货号 Order Number |
|-------------|------------------|
| JUT4-10     | 5 574 405        |
| G-JUT4-4/10 | 8 050 402        |
| PSB3/10/4   | 8 573 101        |
| MPS         | 5 553 101        |
| HZB9        | 8 868 402        |
| E/4         | 5 103 005        |
| NS32/15-AL  | 8 025 002        |

| 型号 Model   | 订货号 Order Number |
|------------|------------------|
| JUT4-35    | 5 574 408        |
| G-JUT4-35  | 8 050 404        |
| PSB3/10/4  | 8 573 101        |
| MPS        | 5 553 101        |
| HZB11      | 8 868 403        |
| E/4        | 5 103 005        |
| NS32/15-AL | 8 025 002        |


| 型号 Model   | 订货号 Order Number |
|------------|------------------|
| JUT4-10C   | 5 574 407        |
| G-JUT4-10C | 8 050 403        |
| PSB3/10/4  | 8 573 101        |
| MPS        | 5 553 101        |
| HZB9       | 8 868 402        |
| E/4        | 5 103 005        |
| NS32/15-AL | 8 025 002        |



| JUT4-10T<br>增强型接线端子Strengthened-type wiring terminal                          |                  |
|-------------------------------------------------------------------------------|------------------|
| 型号 Model                                                                      | 订货号 Order Number |
| JUT4-10T                                                                      | 5 574 406        |
| 注：附件及参数对应查上表<br>Remarks: attachment and parameter please refer to above form. |                  |



| JUT4B-4W<br>微型接线端子mini wiring terminal |             |                     |
|----------------------------------------|-------------|---------------------|
| 厚/宽/高<br>Thickness/Width/Height        |             | 6.8/26.3/32         |
| 接线容量 Wiring capacity: 0.5-6mm²         |             | I<br>(A)            |
| AWG:20-8<br>IEC 60947-7-1              |             | U<br>(V)            |
|                                        |             | 36 600              |
| 说明<br>Specification                    | 型号<br>Model | 订货号<br>Order Number |
| 端子 Terminal                            | JUT4B-4W    | 5 574 413           |
| (1)端板 End plate                        | G-JUT4-4W   | 8 050 407           |
| (2)分组隔板 Segment spacer                 | JAH-4W      | 8 750 407           |
| (3)标识牌 Mark bar                        | HZB5        | 8 868 401           |
| (4)终端固定件 Terminal fixed component      | E/4W        | 5 103 006           |
| (5)安装轨 Installment track               | NS15        | 8 024 003           |

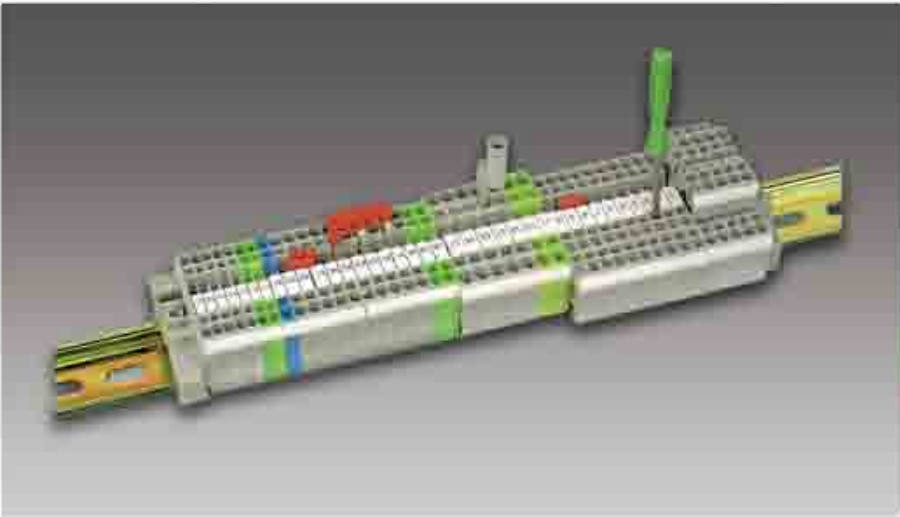

回拉式弹簧是从上面入线连接，导线的入线口设在端子顶端，其优点：行线槽可靠近端子排安装，能充分利用电气柜的空间，提高了接线密度，同时提供了观察接线位的良好角度，方便接线。除此之外，回拉式弹簧端子还具有如下特征：

- 清晰的标记系统
- 最大的接线容量
- 灵活的插拔式桥接件系统。

Return-pulling type spring terminal connects wire from upside, and the wire-in mouth of lead is set at the top of terminal, whose advantage is as follows: wire-crossing groove is installed adjacently to terminal row, which can make full use of space of electric cupboard, heighten wiring density, provide good angle for watching wiring position and simplify wiring operation. Additionally, the return-pulling spring terminal owns following characteristics: clear mark system, maximum wiring capacity and flexible in sert-pull type bridging component system.

说明 Specification 简图 Schematic Drawing

回拉式弹簧：可安装在NS35...型导轨上。  
Return-pulling type spring terminal can be installed on tracks NS35...type

(1)端板 End plate



(2)插拔式桥接件：用于端子中央实现横向桥接，安装绝缘处可标示为分、2-位、3-位、10-位。  
Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into 2-bit 3-bit 10-bit



(3)跨接取组件：可形成跳过某些端子位置位置的跨接。  
Bridging leason component could form bridging by jumping some terminal position



端子组隔板：用于端子组间的视觉及电气隔离。  
Segment spacer: for visual and electric separation between neigh-boring terminal groups.



(5)测试插头：形成测试连接。  
Test plug: forming test connection.



(6)螺丝刀  
Screwdriver



(7)操作工具：用于开启回拉式弹簧  
Operation tool used to open returnpulling type spring



(8)扁平标记条：共10条，每条10位，可插入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



(9)标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(10)终端固定件：对端子排终端起固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component imposing fixed function on terminal row's terminion, the mark clamp and mark strip can be blocked onto it for marking



JUT3-1.5 二导线贯通型接线端子  
Two-lead through-type wiring terminal

|                                 |               |
|---------------------------------|---------------|
| 厚/宽/高<br>Thickness/Width/Height | 4.2/48.5/36.5 |
| 刚性导线 (mm²)<br>Rigid cable       | 0.14~2.5      |
| 柔性导线 (mm²)<br>Soft cable        | 0.14~1.5      |
| I U<br>(A) (V)                  | 17.5 500      |
| AWG:26-16<br>IEC 60947-7-1      |               |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT3-1.5 5 574 301

G-JUT3-1.5/2.5 8 050 301

JFBS2-1.5 8 585 302

JFBS3-1.5 8 585 303

JFBS10-1.5 8 585 310

JSBS3-1.5 8 584 303

JSBS4-1.5 8 584 304

JSBS10-1.5 8 584 310

PAL4 5 553 301

STF0-0.4 x 2.5 5 484 301

STF-BW2-4 8 483 302

ZBFM4 8 868 301

ZB4 8 868 101

E/3 5 103 003



JUT3-2.5 二导线贯通型接线端子  
Two-lead through-type wiring terminal

|                                 |               |
|---------------------------------|---------------|
| 厚/宽/高<br>Thickness/Width/Height | 5.2/48.5/36.5 |
| 刚性导线 (mm²)<br>Rigid cable       | 0.2~4         |
| 柔性导线 (mm²)<br>Soft cable        | 0.2~2.5       |
| I U<br>(A) (V)                  | 31 800        |
| AWG:24-12<br>IEC 60947-7-1      |               |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT3-2.5 5 574 303

G-JUT3-1.5/2.5 8 050 301

JFBS2-2.5 8 585 312

JFBS3-2.5 8 585 313

JFBS10-2.5 8 585 320

JSBS2-2.5 5 584 313

JSBS3-2.5 5 584 314

JSBS10-2.5 5 584 320

PAL4 5 553 301

STF0-0.4 x 2.5 5 484 301

STF-BW2-4 8 483 302

ZBFM5 8 868 302

ZB5 8 868 102

E/3 5 103 003

JUT3-4 二导线贯通型接线端子  
Two-lead through-type wiring terminal

|                                 |             |
|---------------------------------|-------------|
| 厚/宽/高<br>Thickness/Width/Height | 6.2/56/36.5 |
| 刚性导线 (mm²)<br>Rigid cable       | 0.5~6       |
| 柔性导线 (mm²)<br>Soft cable        | 0.5~4       |
| I U<br>(A) (V)                  | 41 800      |
| AWG:24-10<br>IEC 60947-7-1      |             |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT3-4 5 574 305

G-JUT3-4 8 050 305

JFBS2-4 8 585 322

JFBS3-4 8 585 323

JFBS10-4 8 585 330

JSBS2-4 5 584 323

JSBS3-4 5 584 324

JSBS10-4 5 584 330

PAL4 5 553 301

STF2-0.8 x 4 5 484 303

STF-BW2-6 8 483 322

ZBFM6 8 868 303

ZB6 8 868 103

E/3 5 103 003

JUT3-6 二导线贯通型接线端子  
Two-lead through-type wiring terminal

|                                 |               |
|---------------------------------|---------------|
| 厚/宽/高<br>Thickness/Width/Height | 8.2/65.5/43.5 |
| 刚性导线 (mm²)<br>Rigid cable       | 0.5~10        |
| 柔性导线 (mm²)<br>Soft cable        | 0.5~6         |
| I U<br>(A) (V)                  | 57 800        |
| AWG:24-8<br>IEC 60947-7-1       |               |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
|----------|------------------|

JUT3-6 5 574 307

G-JUT3-6 8 050 309

JFBS2-6 8 585 332

JFBS3-6 8 585 333

JFBS10-6 8 585 340

PAL4 5 553 301

STF2-0.8 x 4 5 484 303

ZBFM8 8 868 304

ZB8 8 868 104

E/3 5 103 003



JUT3-1.5/1-2 三导线贯通型接线端子
Three-lead through-type wiring terminal
厚/宽/高: 4.2/60.5/36.5
Thickness/Width/Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:26-16 0.14-2.5 0.14-1.5 17.5 500
IEC 60947-7-1

三线回拉式弹簧端子
三线回拉式弹簧端子有三个电位相同的接线位，用JUT3的组合端子可对电位或才输入信号直行完美的分配。三线回拉式弹簧端子在中部没有两个桥接孔，通过它们可与相邻端子组成任意形成的跨接。

Three-lead return-pulling terminal
Three-lead return-pulling type spring terminal owns three wiring potentials with the same electrical potential, using JUT3 combination terminal could conduct perfect distribution of electrical potentials or input signals. Three-lead return-pulling type terminal owns two bridging hole in center section, through which bridging could of any form be realized with adjacent terminal.

三线回拉式弹簧接地端子
三线回拉式弹簧接地端子与等额定截面积的贯通端子的轮廓与厚度相同。黄绿色的标志使之更清晰易辨。
端板、标记条等与同类贯通端子使用。

Three-lead return-pulling type spring landing terminal
Three-lead return-pulling type spring landing terminal owns the same outline and thickness as through terminal with same rated section area, the yellow/green mark makes it clearer for being distinguished.
The end plate mark strip and the similar through terminal are universally used.


说明 Specification 简图 Schematic Drawing
(1)端板 End plate
(2)插接式桥接件 用于端子中央实现横向桥接，由黄绿色绝缘漆可标示可分：2-位、3-位、10-位。
(3)跨接取线件：可形成跳过某些端子需要位置的跨接。
(4)分组隔板：用于端子组间的视觉及电气隔离。
(5)测试插头：形成测试连接。
(6)螺丝刀
(7)操作工具 用于开启回拉式弹簧
(8)扁平标记条：共10条，每条10位可填入端子外侧标识槽进行标示。
(9)标记条：有横向和竖向两种字体，10位。
(10)终端固定件：对端子排特端起固定件作用。标记夹和标记条可卡在它上进行标识。



JUT3-2.5/1-2 三导线贯通型接线端子
Three-lead through-type wiring terminal
厚/宽/高: 5.2/60.5/36.5
Thickness/Width/Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:24-12 0.2-4 0.2-2.5 24 800
IEC 60947-7-1

JUT3-4/1-2(开发中) 三导线贯通型接线端子
Three-lead through-type wiring terminal
厚/宽/高: 6.2/71.5/36.5
Thickness/Width/Height
刚性导线 (mm²) 柔性导线 (mm²) I U
Rigid cable Soft cable (A) (V)
AWG:24-10 0.5-6 0.5-4 41 800
IEC 60947-7-1

型号 Model 订货号 Order Number
JUT3-2.5/1-2 5 574 317
G-JUT3-2.5/1-2 8 050 302
JFBS2-2.5 8 585 312
JFBS3-2.5 8 585 313
JFBS10-2.5 8 585 320
JSBS3-2.5 5 584 313
JSBS4-2.5 5 584 314
JSBS10-2.5 5 584 320
JTP-1.5/1-2 8 750 302
PAL4 5 553 301
STF1-0.6 x 3.5 5 484 301
STF-BW2-5 8 483 312
ZBFM5 8 868 302
ZB5 8 868 102
E/3 5 103 003
JUT3-4/1-2 5 574 319
G-JUT3-4/1-2 8 050 306
JFBS2-4 8 585 322
JFBS3-4 8 585 323
JFBS10-4 8 585 330
JSBS3-4 5 584 323
JSBS4-4 5 584 324
JSBS10-4 5 584 330
JTP-1.5/1-2 8 750 302
PAL4 5 553 301
STF1-0.6 x 3.5 5 484 302
STF-BW2-6 8 483 322
ZBFM6 8 868 303
ZB6 8 868 103
E/3 5 103 003

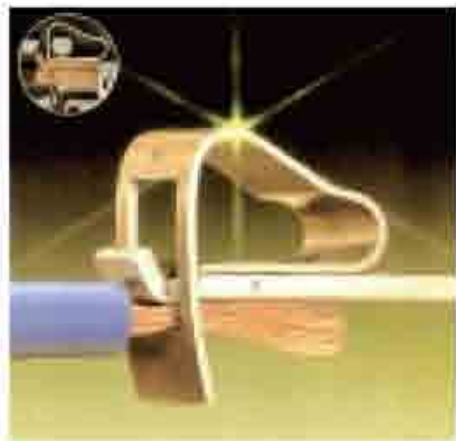

四线回拉式弹簧端子  
四线回拉式弹簧端子两侧各有两个的接线位，可解决电位分配问题；

使用四线回拉式弹簧端子可避免使用过多的桥接件，这样既可减短端子排的长度，使端子排结构布局清晰，又可节省接线费用。

Four-lead return-pulling spring terminal  
Four-lead return-pulling spring terminal has two wiring position in both sides, which could resolve potential distribution question. Using four-lead return-pulling type spring terminal could avoid using too many bridging components, which can shorten the length of terminal row, make terminal row's structure clearer and reduce wiring cost.

四线回拉式弹簧接地端子  
四线回拉式弹簧接地端子与等额定截面积的贯通端子的轮廓与厚度相同。黄绿色的标志使之更清晰易辨。

端板、标记条等与同类贯通端子通用。  
Four-lead return-pulling type spring landing terminal  
Four-lead return-pulling type spring landing terminal owns the same outline and thickness as through terminal with the same rated section, the yellow/green mark makes it clearer for being distinguished. The end plate, mark strip and the similar same through terminal are universally used.

| 说明 Specification                                                                                                                                                                                                   | 简图 Schematic Drawing | 型号 Model                             | 订货号 Order Number                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------|-------------------------------------|
| 回拉式弹簧端子：可安装在NS35 L型导轨上。<br>Return-pulling type spring terminal can be installed on tracks NS35 L-type.                                                                                                             |                      | JUT3-1.5/2-2                         | 5 574 321                           |
| (1)端板 End plate                                                                                                                                                                                                    |                      | G-JUT3-2.5/2-2                       | 8 050 303                           |
| (2)插接式桥接件：用于端子中央实现横向桥接，黄绿色绝缘处可标示区分：2-位、3-位、10-位。<br>Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of insulation can be divided into 2-bit, 3-bit, 10-bit. |                      | JFBS2-1.5<br>JFBS3-1.5<br>JFBS10-1.5 | 8 585 302<br>8 585 303<br>8 585 310 |
| (3)跨接取线件：可形成跳过某些端子需要位置的跨接。<br>Bridging leason component could form bridging by jumping some terminal position.                                                                                                     |                      | JSBS2-1.5<br>JSBS3-1.5<br>JSBS10-1.5 | 8 584 303<br>8 584 304<br>8 584 310 |
| 绝缘分隔板：用于端子组间的视角及电气隔离。<br>Segment spacer: for visual and electric separation between neighbor terminal groups.                                                                                                      |                      | JTP-1.5/2-2                          | 8 750 303                           |
| (5)测试插头：形成测试连接。<br>Test plug: forming test connection.                                                                                                                                                             |                      | PAL4                                 | 5 553 301                           |
| (6)螺丝刀<br>Screwdriver                                                                                                                                                                                              |                      | STF0-0.4 x 2.5                       | 5 484 301                           |
| (7)操作工具：用于开启回拉式弹簧。<br>Operation tool used to open returnpulling type spring.                                                                                                                                       |                      | STF-BW3-4                            | 8 483 303                           |
| (8)扁平标记条：共10条，每条10位，可塞入端子外侧标识槽进行标示。<br>Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.                                               |                      | ZBFM4                                | 8 868 301                           |
| (9)标记条：有横向和竖向两种字体，10位。<br>Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.                                                                                                   |                      | ZB4                                  | 8 868 101                           |
| (10)终端固定件：对端子排终端起固定作用。标记夹和标记条可卡在它上进行标识。<br>Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking.                       |                      | E/3                                  | 5 103 003                           |



| 说明 Specification                                    | 简图 Schematic Drawing | 型号 Model                            | 订货号 Order Number |
|-----------------------------------------------------|----------------------|-------------------------------------|------------------|
| 四线贯通型接线端子<br>Four-lead through-type wiring terminal |                      | JUT3-1.5/2-2                        | 5 574 321        |
| 四线贯通型接线端子<br>Four-lead through-type wiring terminal |                      | JUT3-2.5/2-2                        | 5 574 323        |
| 四线贯通型接线端子<br>Four-lead through-type wiring terminal |                      | JUT3-4/2-2                          | 5 574 325        |
| G-JUT3-2.5/2-2                                      |                      | 8 050 306                           |                  |
| G-JUT3-4/2-2                                        |                      | 8 050 307                           |                  |
| JFBS2-2.5<br>JFBS3-2.5<br>JFBS10-2.5                |                      | 8 585 312<br>8 585 313<br>8 585 320 |                  |
| JFBS2-4<br>JFBS3-4<br>JFBS10-4                      |                      | 8 585 322<br>8 585 323<br>8 585 330 |                  |
| JSBS3-2.5<br>JSBS4-2.5<br>JSBS10-2.5                |                      | 5 584 313<br>5 584 314<br>5 584 320 |                  |
| JSBS3-4<br>JSBS4-4<br>JSBS10-4                      |                      | 5 584 323<br>5 584 324<br>5 584 330 |                  |
| JTP-1.5/2-2                                         |                      | 8 750 303                           |                  |
| JTP-1.5/2-2                                         |                      | 8 750 303                           |                  |
| PAL4                                                |                      | 5 553 301                           |                  |
| PAL4                                                |                      | 5 553 301                           |                  |
| STF1-0.6 x 3.5                                      |                      | 5 484 301                           |                  |
| STF1-0.8 x 4                                        |                      | 5 484 303                           |                  |
| STF-BW3-5                                           |                      | 8 483 313                           |                  |
| STF-BW3-6                                           |                      | 8 483 323                           |                  |
| ZBFM5                                               |                      | 8 868 302                           |                  |
| ZBFM6                                               |                      | 8 868 303                           |                  |
| ZB5                                                 |                      | 8 868 102                           |                  |
| ZB6                                                 |                      | 8 868 103                           |                  |
| E/3                                                 |                      | 5 103 003                           |                  |
| E/3                                                 |                      | 5 103 003                           |                  |



Table with technical specifications for JUT3-1.5/2, including dimensions (4.2/67.5/49), cable types (rigid and soft), and ratings (17.5 A, 500 V).

双层回拉式弹簧端子
双层回拉式弹簧端子可在一个端子上接两个不同的电位，相对于额定截面和厚度相同的单层端子而言，双层接线节约了50%的导轨长度，双层端子的上下层均可桥接和标识，以完成不同的接线任务，并使导线回路归属关系清晰易辨。

说明 Specification 简图 Schematic Drawing

回拉式弹簧端子，可安装在NS35...型导轨上。
Return-pulling type spring terminal can be installed on tracks NS35... type.

Table with 2 columns: 型号 Model, 订货号 Order Number

Double-layer return-pulling spring terminal
Double-layer return-pulling spring terminal can be connected with two different potentials on one terminal, compared with single-layer terminal with the same rated section and thickness, the double-layer wiring could save 50% of track length, the upper/lower layer of double-layer terminal both can be bridge-connected and marked in order to finish different wiring duty, making lead circuit ownership relationship clearer for being distinguished.

(1)端板 End plate



Table with 2 columns: 型号 Model, 订货号 Order Number

(2)插接式桥接件 用于端子中央实现横向桥接，
Insert-pull type bridging component used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into 2-bit 3-bit 10-bit.



Table with 2 columns: 型号 Model, 订货号 Order Number

(3)跨接取线件 可形成跳过某些端子需要位置的跨接。
Bridging leason component could form bridging by jumping some terminal position.



Table with 2 columns: 型号 Model, 订货号 Order Number

(4)分组隔板 用于端子组间的视觉及电气隔离。
Segment spacer for visual and electric separation between neigh-boring terminal groups.



Table with 2 columns: 型号 Model, 订货号 Order Number

(5)测试插头 形成测试连接。
Test plug: forming test connection.



Table with 2 columns: 型号 Model, 订货号 Order Number

(6)螺丝刀
Screwdriver



Table with 2 columns: 型号 Model, 订货号 Order Number

(7)操作工具 用于开启回拉式弹簧
Operation tool used to open returnpulling type spring



Table with 2 columns: 型号 Model, 订货号 Order Number

(8)扁平标记条 共10条，每条10位，
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



Table with 2 columns: 型号 Model, 订货号 Order Number

(9)标记条 有横向和竖向两种字体，10位。
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



Table with 2 columns: 型号 Model, 订货号 Order Number

(10)终端固定件 对端子排终端起固定件作用。
Terminal fixed component imposing fixed function on terminal row's termination, the mark clamp and mark strip can be blocked onto it for marking.



Table with 2 columns: 型号 Model, 订货号 Order Number



Table with technical specifications for JUT3-2.5/2, including dimensions (5.2/67.5/49), cable types (rigid and soft), and ratings (24 A, 500 V).

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number



Table with technical specifications for JUT3-4/2, including dimensions (6.2/83.5/49), cable types (rigid and soft), and ratings (32 A, 500 V).

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number

Table with 2 columns: 型号 Model, 订货号 Order Number



接线方法三步  
Three-step of wiring method



端板安装  
End plate installment



用不干胶标记条做标记  
Marked with non-dry glue  
identification strip



用跨接器进行跨接  
Cross connection adaptor



边插安装  
Side-inserted installment



测试插头及其适配器的应用  
The application of test plug  
and its adapter

厚 / 宽 高  
Thickness/Width/Height



| 型号 Model                       | JUT3-1.5F | JUT3-1.5F/2<br>(开发中) | JUT3-2.5F   | JUT3-2.5/2<br>(开发中) | JUT3-4F     | JUT3-4F/2<br>(开发中) |
|--------------------------------|-----------|----------------------|-------------|---------------------|-------------|--------------------|
| 订货号 Order Number               | 5 574 361 | 5 574 362            | 5 574 363   | 5 574 364           | 5 574 365   | 5 574 366          |
| 厚 / 宽 高 Thickness/Width/Height | 5/25/17.2 | 8/25/17.2            | 6/28.4/18.2 | 10/28.4/18.2        | 7/33.5/23.2 | 12/33.5/23.2       |
| 额定截面 rated section(mm²)        | 0.8-1.5   | AWG:18-16            | 0.8-2.5     | AWG:18-12           | 0.8-4       | AWG:18-10          |
| 额定电压 rated voltage(V)          | 400       |                      | 500         |                     | 690         |                    |
| 额定电流 rated current(A)          | 18        |                      | 24          |                     | 24          |                    |
| 剥线长度 Line-shelling length(mm)  | 8-9       |                      | 8-9         |                     | 9-10        |                    |

| 型号 Model                                | 订货号 Order Number                                                                                | 型号 Model  | 订货号 Order Number | 型号 Model  | 订货号 Order Number | 型号 Model  | 订货号 Order Number |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|-----------|------------------|-----------|------------------|-----------|------------------|
| (1)端板<br>End plate                      |  G-JUT3-1.5F | 8 050 261 | G-JUT3-2.5F      | 8 050 262 | G-JUT3-4F        | 8 050 263 |                  |
| (2)边插<br>Side adaptor                   |  JEB-1.5F    | 5 582 261 | JEB-2.5F         | 5 582 262 | JEB-4F           | 5 582 263 |                  |
| (3)跨接器<br>Cross connec-<br>tion adaptor |  KJQ-1.5F    | 5 086 261 | KJQ-2.5F         | 5 086 261 | KJQ-4F           | 5 086 261 |                  |



| 型号 Model                       | JUT3-1.5W(开发中) | JUT3-2.5W(开发中) | JUT3-4W(开发中)  |
|--------------------------------|----------------|----------------|---------------|
| 订货号 Order Number               |                |                |               |
| 厚 / 宽 高 Thickness/Width/Height | 30.5/4/42.5mm  | 30.5/5/42.5mm  | 32.5/6/42.5mm |
| 额定截面 rated section(mm²)        | 0.08-1.5mm²    | 0.08-2.5mm²    | 0.08-45mm²    |
| 额定电压 rated voltage(V)          | 800V           | 800V           | 800V          |
| 额定电流 rated current(A)          | 18A            | 24A            | 32A           |
| 剥线长度 Line-shelling length(mm)  | 8-9            | 8-9            | 9-10          |
| 安装 Installation                | TS 35          | TS 35          | TS 35         |



| 型号 Model                       | JUT3-6W(开发中) | JUT3-10W(开发中) |
|--------------------------------|--------------|---------------|
| 订货号 Order Number               |              |               |
| 厚 / 宽 高 Thickness/Width/Height | 37/8/46.5mm  | 41.5/10/52mm  |
| 额定截面 rated section(mm²)        | 0.08-6mm²    | 0.08-10mm²    |
| 额定电压 rated voltage(V)          | 800V         | 800V          |
| 额定电流 rated current(A)          | 41A          | 57A           |
| 剥线长度 Line-shelling length(mm)  | 12-13        | 12-13         |
| 安装 Installation                | TS 35        | TS 35         |



JUT3-1.5PE 二导线贯通型接地端子  
Two-lead through-landing terminal

|                                       |                          |          |      |
|---------------------------------------|--------------------------|----------|------|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 4.2/48.5/36.5            |          |      |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)      |      |
| AWG:26-16                             | 0.14-2.5                 | 0.14-1.5 | 17.5 |
| IEC 60947-7-1                         |                          |          |      |

JUT3-2.5PE 二导线贯通型接地端子  
Two-lead through-landing terminal

|                                       |                          |         |    |
|---------------------------------------|--------------------------|---------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 5.2/48.5/36.5            |         |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)     |    |
| AWG:24-12                             | 0.2-4                    | 0.2-2.5 | 31 |
| IEC 60947-7-1                         |                          |         |    |

**特征**  
与额定截面积相同的贯通端子的轮廓与厚度相一致。  
接地端子可直接与贯通端子相邻排列。当接地端子卡入导轨时就会自动与导轨电气相连，导轨即为接地总线。  
可标识，保证了导线与回路的归属关系清晰易辨。

| 型号 Model   | 订货号 Order Number |
|------------|------------------|
| JUT3-1.5PE | 5 574 302        |

| 型号 Model   | 订货号 Order Number |
|------------|------------------|
| JUT3-2.5PE | 5 574 304        |

端板：标记条等与同类贯通端子通用。（见31页）  
End plate:and mark bar can be qiversily connected with the similar through terminal(see page 31)

端板：标记条等与同类贯通端子通用。（见32页）  
End plate:and mark bar can be qiversily connected with the similar through terminal(see page 32)

Return-pulling type spring landing terminal owns following properties: Its outline and thickness is the same as through terminal with the same rated section area, the landing terminal could be laid closnext to through terminal directly, when the landing terminal is plugged into track, it would be electrically connected with guide track auto matically, and the track is landing bus.The identification property ensures that the ownership relationship of lead and circuit is clear to distinguish.



JUT3-4PE 二导线贯通型接地端子  
Two-lead Through-landing terminal

|                                       |                          |       |    |
|---------------------------------------|--------------------------|-------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 8.2/56/36.5              |       |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)   |    |
| AWG:24-10                             | 0.5-6                    | 0.5-4 | 41 |
| IEC 60947-7-1                         |                          |       |    |

JUT3-6PE 二导线贯通型接地端子  
Two-lead through landing terminal

|                                       |                          |       |    |
|---------------------------------------|--------------------------|-------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 8.2/65.5/43.5            |       |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)   |    |
| AWG:24-8                              | 0.5-10                   | 0.5-6 | 57 |
| IEC 60947-7-1                         |                          |       |    |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
| JUT3-4PE | 5 574 306        |

| 型号 Model | 订货号 Order Number |
|----------|------------------|
| JUT3-6PE | 5 574 308        |

端板：标记条等与同类贯通端子通用。（见32页）  
End plate:and mark bar can be qiversily connected with the similar through terminal(see page 32)

端板：标记条等与同类贯通端子通用。（见32页）  
End plate:and mark bar can be qiversily connected with the similar through terminal(see page 32)



JUT3-1.5/1-2PE 三导线贯通型接线端子  
Three-lead through-type wiring terminal

|                                       |                          |          |      |
|---------------------------------------|--------------------------|----------|------|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 4.2/60.5/36.5            |          |      |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)      |      |
| AWG:26-16                             | 0.14-2.5                 | 0.14-1.5 | 17.5 |
| IEC 60947-7-1                         |                          |          |      |

JUT3-2.5/1-2PE 三导线贯通型接线端子  
Three-lead through-type wiring terminal

|                                       |                          |         |    |
|---------------------------------------|--------------------------|---------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 5.2/60.5/36.5            |         |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)     |    |
| AWG:24-12                             | 0.2-4                    | 0.2-2.5 | 31 |
| IEC 60947-7-1                         |                          |         |    |

JUT3-4/1-2PE 三导线贯通型接线端子  
Three-lead through-type wiring terminal

|                                       |                          |       |    |
|---------------------------------------|--------------------------|-------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 6.2/71.5/36.5            |       |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)   |    |
| AWG:24-10                             | 0.5-6                    | 0.5-4 | 41 |
| IEC 60947-7-1                         |                          |       |    |

| 型号 Model       | 订货号 Order Number |
|----------------|------------------|
| JUT3-1.5/1-2PE | 5 574 316        |

| 型号 Model       | 订货号 Order Number |
|----------------|------------------|
| JUT3-2.5/1-2PE | 5 574 318        |

| 型号 Model     | 订货号 Order Number |
|--------------|------------------|
| JUT3-4/1-2PE | 5 574 320        |



JUT3-1.5/2-2PE(开发中)四导线贯通型接线端子  
Four-lead through-type landing terminal

|                                       |                          |          |      |
|---------------------------------------|--------------------------|----------|------|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 4.2/72/36.5              |          |      |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)      |      |
| AWG:26-16                             | 0.14-2.5                 | 0.14-1.5 | 17.5 |
| IEC 60947-7-1                         |                          |          |      |

JUT3-2.5/2-2PE 四导线贯通型接地端子  
Four-lead through-type landing terminal

|                                       |                          |         |    |
|---------------------------------------|--------------------------|---------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 5.2/72/36.5              |         |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)     |    |
| AWG:24-12                             | 0.2-4                    | 0.2-2.5 | 30 |
| IEC 60947-7-1                         |                          |         |    |

JUT3-4/2-2PE(开发中)四导线贯通型接地端子  
Four-lead through-type landing terminal

|                                       |                          |       |    |
|---------------------------------------|--------------------------|-------|----|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 6.2/87/36.5              |       |    |
| 刚性导线 (mm²)<br>Rigid cable             | 柔性导线 (mm²)<br>Soft cable | (A)   |    |
| AWG:24-10                             | 0.5-6                    | 0.5-4 | 40 |
| IEC 60947-7-1                         |                          |       |    |

| 型号 Model       | 订货号 Order Number |
|----------------|------------------|
| JUT3-1.5/2-2PE | 5 574 322        |

| 型号 Model       | 订货号 Order Number |
|----------------|------------------|
| JUT3-2.5/2-2PE | 5 574 324        |

| 型号 Model     | 订货号 Order Number |
|--------------|------------------|
| JUT3-4/2-2PE | 5 574 326        |

端板：标记条等与同类贯通端子通用。（见32页）  
End plate:and mark bar can be qiversily connected with the similar through terminal(see page 32)

端板：标记条等与同类贯通端子通用。（见32页）  
End plate:and mark bar can be qiversily connected with the similar through terminal(see page 32)

工业配电接线端子-开关型端子系列  
Industrial Distribution Terminal Blocks – switching terminal series

可断电型接线端子分试验型接线端子和开关型接线端子。

Cut-off type wiring terminal is divided into test type wiring terminal and switch type wiring terminal

开关型接线端子：采用闸刀形式进行线路的通断操作，以便在线路检修和测量中迅速找故障，并在无电压的情况下检修。该端子接触电阻小，载流量达16A，闸刀钮用鲜橙标记，清晰醒目。

Switch-type wiring terminal: adopting switch-knife way to execute on-off operation of wire, which can find out obstacle fast in the process of wire impair and measurement, additionally, the examination and impair could be conducted under case of non-voltage. The contacted resistance of this terminal is small and the load current quantity can achieve 16A, the switch-knife is marked with fresh-orange and very clear.



JUT1-4/2-2K 双进双出开关型接线端子  
Two-in two-out Switch-type wiring terminal

|                                                                         |                |
|-------------------------------------------------------------------------|----------------|
| 厚/宽/高<br>Thickness/Width/Height                                         | 6.2/63.5/47/52 |
| 刚性导线 (mm²)   柔性导线 (mm²)   I   U<br>Rigid cable   Soft cable   (A)   (V) |                |
| AWG:24-12   0.2-4   0.2-4   16   690                                    |                |
| IEC 60947-7-1                                                           |                |

JUT1-4K 开关型接线端子 Switch-type wiring terminal

|                                                                         |                  |
|-------------------------------------------------------------------------|------------------|
| 厚/宽/高<br>Thickness/Width/Height                                         | 6.2/51/58.5/63.5 |
| 刚性导线 (mm²)   柔性导线 (mm²)   I   U<br>Rigid cable   Soft cable   (A)   (V) |                  |
| AWG:24-12   0.2-4   0.2-4   16   800                                    |                  |
| IEC 60947-7-1                                                           |                  |

说明 Specification 简图 Schematic Drawing

端子：新通用安装在NS32□型，或NS35□型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32□ or NS35□.


(1)端板 End plate



边中心联线件：用于端子中央，实现横向跨接，螺钉头带绝缘圈，可分2-位、3-位、5-位、10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into 2-digit, 3-digit, 5-digit and 10-digit.



边边跨式联线件：全绝缘2位，全绝缘3位，全绝缘10位。  
Side adaptor: Full insulation in 2-digit, Full insulation in 3-digit, Full insulation in 10-digit.




4分组隔片：用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(5)测试插头：与测试插座形成测试连接。  
Test plug: to form a testing connection by using test socket.



标记条：有横向和竖向两种字体，10位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



型号 Model 订货号 Order Number

JUT1-4/2-2K 5 574 172

G-JUT1-4/2-2 8 050 105

JEB2-4 5 582 112  
JEB3-4 5 582 113  
JEB10-4 5 582 110

ZB6 8 868 103

型号 Model 订货号 Order Number

JUT1-4K 5 574 132

JEB2-4 5 582 112  
JEB3-4 5 582 113  
JEB10-4 5 582 110

MPS 5 553 101

ZB6 8 868 103

工业配电接线端子-开关型端子系列  
Industrial Distribution Terminal Blocks – switching terminal series

JUT1试验型接线端子：起开关左右的可滑动金属件能通过端子压线框承受最大工作电流。切换时及螺丝刀旋松螺钉，移动滑块，则开关位置清晰可见。端子两端设有测试插座，配用相应的测试插头可形成测试连接，测量电流时可不中断系统工作。

JUT1 test-type wiring terminal: the movable metal component used as switch could stand maximum work current through terminal wire-pressing frame. When in switch-over, operator should use screwdriver to whirl screw loosely and move slipping-lump: then the switch would be seen clearly. There is test socket at two sides of terminal in addition to corresponding test plugs used to form test connection, the system operation doesn't need to be suspended at the time of measuring current.



JUT1-2.5S

|                                                                         |                  |
|-------------------------------------------------------------------------|------------------|
| 厚/宽/高<br>Thickness/Width/Height                                         | 8.2/61/58.5/63.5 |
| 刚性导线 (mm²)   柔性导线 (mm²)   I   U<br>Rigid cable   Soft cable   (A)   (V) |                  |
| AWG:20-8   0.5-10   0.5-6   57   500                                    |                  |
| IEC 60947-7-1                                                           |                  |

型号 Model 订货号 Order Number

JUT1-2.5S 5 574 129

G-JUT1-2.5S 8 050 108

JEB2-6 5 582 122  
JEB3-6 5 582 123  
JEB10-6 5 582 120

JAP/2.5S 8 750 104

PS 5 553 102

ZB8 8 868 104

JUT1-10S(开发中)

|                                                                         |                   |
|-------------------------------------------------------------------------|-------------------|
| 厚/宽/高<br>Thickness/Width/Height                                         | 10.2/61/58.5/63.5 |
| 刚性导线 (mm²)   柔性导线 (mm²)   I   U<br>Rigid cable   Soft cable   (A)   (V) |                   |
| AWG:24-12   0.5-16   0.5-10   76   500                                  |                   |
| IEC 60947-7-1                                                           |                   |

型号 Model 订货号 Order Number

JUT1-10S 5 574 130

G-JUT1-2.5S 8 050 108

JEB2-10 5 582 132  
JEB3-10 5 582 133  
JEB10-10 5 582 130

JAP/10S 8 750 104

MPS 5 553 101

ZB10 8 868 105

JUT1-6S

|                                                                         |                  |
|-------------------------------------------------------------------------|------------------|
| 厚/宽/高<br>Thickness/Width/Height                                         | 8.2/72/51.5/56.5 |
| 刚性导线 (mm²)   柔性导线 (mm²)   I   U<br>Rigid cable   Soft cable   (A)   (V) |                  |
| AWG:20-8   0.5-10   0.5-6   57   400                                    |                  |
| IEC 60947-7-1                                                           |                  |

型号 Model 订货号 Order Number

JUT1-6S 5 574 131

G-JUT1-6S 8 050 109

JFB10-6S/S(短) 5 585 170S  
JFB10-6S/L(长) 5 585 170L

JEB2-6 5 582 122  
JEB3-6 5 582 123  
JEB10-6 5 582 120

JAP/6S 8 750 105

PS 5 553 102

ZB8 8 868 104

工业配电接线端子—开关型端子系列  
Industrial Distribution Terminal Blocks – switching terminal series



| 说明 Specification 简图 Schematic Drawing                                                                                                                                                                                                     | JUT2-6S1<br>试验型接线端子 Test type terminal |                                     | JUT2-4K<br>开关型接线端子 Switch type terminal |                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------|-----------------------------------------|-------------------------------------|
|                                                                                                                                                                                                                                           | 型号 Model                               | 订货号 Order Number                    | 型号 Model                                | 订货号 Order Number                    |
| 端子：带通用安装在NS32 L型，或NS35 L型导轨上。<br>Terminal with general-purpose mounting feet, can be installed on tracks: NS32 L or NS35 L.                                                                                                               | JUT2-6S1                               | 5 574 217                           | JUT2-4K                                 | 5 574 223                           |
| (1) 隔板 End plate                                                                                                                                                                                                                          | G-JUT2-6S1                             | 8 050 211                           | G-JUT2-4K                               | 8 050 210                           |
| (2) 分隔板：用于端子组间的视觉及电气隔离。<br>Segment spacer: for visual and electric separation between neighboring terminal groups.                                                                                                                        | TW-6S1                                 | 8 750 207                           | TW-4K                                   | 8 750 208                           |
| (3) 绝缘隔片：用于相邻接插件的电气隔离，可事后插入，不占导轨任何空间。<br>Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.                                                      | TS-6S1                                 | 8 751 204                           |                                         |                                     |
| (4) 边插式连接器：全绝缘2位，全绝缘3位，全绝缘10位。<br>Side adaptor: Full insulation in 2-digit, Full insulation in 3-digit, Full insulation in 10-digit.                                                                                                      | JEB2-6<br>JEB3-6<br>JEB10-6            | 5 582 122<br>5 582 123<br>5 582 120 | JEQ2-4K<br>JEQ3-4K<br>JEQ10-4K          | 5 582 232<br>5 582 233<br>5 582 230 |
| (5) 中心连接器：用于端子中央，实现横桥连接，螺钉头有绝缘帽，可分2-位、3-位、5-位、10-位。<br>Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is divided into 2-digit, 3-digit, 5-digit and 10-digit. | JQ10-6                                 | 5 585 230                           |                                         |                                     |
| (6) 测试插座：与测试插座形成测试连接。<br>Test plug to form a testing connection by sing test socket.                                                                                                                                                      | PS4                                    | 5 553 102                           | PS2.3                                   | 5 553 201                           |
| (7) 标记条：有横向和竖向两种字体，10位。<br>Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.                                                                                                                         | DEK5                                   | 8 868 201                           | DEK5                                    | 8 868 201                           |
| (8) 终端固定件：对端子排终端起固定件作用。(JUT2系列适用) Terminal fixed component; mark it could be used as fixed component to terminal row's termination (universal for JUT2 series).                                                                           | E/2                                    | 5 103 003                           | E/2                                     | 5 103 003                           |
| (9) 安装轨 (NS35/7.5)<br>Installment track (NS35/7.5)                                                                                                                                                                                        | NS35/7.5                               | 8 024 001                           | NS35/7.5                                | 8 024 001                           |
| (10) 终端固定件<br>Terminal fixed component                                                                                                                                                                                                    | E/4                                    | 5 103 005                           | E/4                                     | 5 103 005                           |
| (11) 安装轨 (NS35/7.5)<br>Installment track (NS35/7.5)                                                                                                                                                                                       | NS32/15                                | 8 025 002                           | NS32/15                                 | 8 025 002                           |



工业配电接线端子—开关型端子系列  
Industrial Distribution Terminal Blocks – switching terminal series



| JUT4-10S<br>试验型接线端子 |                  | JUT1-6G  |                  |
|---------------------|------------------|----------|------------------|
| 型号 Model            | 订货号 Order Number | 型号 Model | 订货号 Order Number |
| JUT4-10S            | 5 574 411        | JUT1-6G  | 5 574 411        |
| G-JUT4-10S          | 8 050 406        |          |                  |
| JAH-10S             | 8 750 406        |          |                  |
| JFH-10S             | 5 585 406        |          |                  |
| PSB4/7/6            | 8 573 102        |          |                  |
| PS                  | 5 553 102        |          |                  |
| HZB9                | 8 868 402        |          |                  |
| E/4                 | 5 103 005        |          |                  |
| NS32/15-AL          | 8 025 002        |          |                  |

| 用途                                                                                                                                                                               | 功能                                                                                                          | 特点                                                                                                                                                                                                                                                                                                           | 原理                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 用于电力系统继电保护的交流电压、电流回路。根据《反措要点》要求加强抗干扰电容的场所。                                                                                                                                       | 通过保护的交流输入回路通过该端子可滤去“噪声”干扰。                                                                                  | 直接通过该端子接线实现干扰功能，省去了抗干扰盒、箱，拓宽了保护屏后的位置。<br>接线端对地（及电容之间）能承受DC2500V，历时1min的耐压试验。                                                                                                                                                                                                                                 | 并联于外部负载的电容，对电源产生的无用射频信号产生阻抗，低频信号通过时，电容的阻抗作用很小，当电容的阻抗小于外部负载10倍时，高频信号则直接通过电容导入地下，达到滤去无用高频信号的目的。                                                                                                                                                                                                                                                                                                                                                                                                             |
| For protecting the AC voltage and current of the power system, where need to strengthen the anti-interference electric capacity according to the "main point of countermeasure". | Through terminal, the AC input return circuit with dynamic protection can filter the interference of noise. | Through terminal blocks can directly realize anti-interference function, it can save anti-interference box and case, and can also wide the space after the safeguard screen.<br>The wiring end can bear DC2005V, 1 minute's compression resistance test from the ground (and between the electric capacity). | The electric capacity paralleling to the external load, can interfere the useless radio-frequency signal from the electric bumping source. The impedance function of electric capacity is very weak when the low-frequency signal passes through. When the impedance of the electric capacity is 10 times smaller than the external load, the high-frequency signal directly inducts to the underground through the electric capacity to achieve the goal of filtering the useless high-frequency signal. |

| Use | Function | Characteristics | Principle |
|-----|----------|-----------------|-----------|
|     |          |                 |           |



工业配电接线端子-保险丝型端子系列
Industrial Distribution Terminal Blocks - Fuse type terminal series

JUT1-4RD保险丝形接线端子。采用分断悬壁来接入G型保险丝，操作十分方便。外壳采用全封闭，安全可靠。带发光显示的端子会给出保险丝的通断信号。该类端子的电流由安装的保险丝决定，电压由选择的发光显示决定。

JUT1-4RD Fuse-type wiring terminal series: adopting broken bracket to connect into G type fuse without any difficulty, and the outer-case adopts whole-seal structure with security and reliability properties, the luminous terminal would give on-off signal of fuse. The current of this type terminal is determined by installed fuse, and the voltage is determined by selected luminous display

说明 Specification 简图 Schematic Drawing

端子 带通用安装在NS32 型，或NS35 型导轨上。Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

Table with 4 columns: Description, Diagram, Model, Order Number. Rows include side bracket components (JEB10-6), central bracket components (JFB10-16), test socket components (PSB4/4/7/6, PS), and mark bar components (ZB8).

Table with 2 columns: Specification, Order Number. Row for JUT1-4RD with thickness/width/height and order number 5 574 133.

Table with 2 columns: Specification, Order Number. Row for JUT1-10RD with thickness/width/height and order number 5 574 136.

型号 Model 订货号 Order Number

Table with 2 columns: Model, Order Number. Rows for JUT1-4RD, JUT1-4RD/LED24, and JUT1-4RD/LA250.

型号 Model 订货号 Order Number

Table with 2 columns: Model, Order Number. Rows for JUT1-10RD, JUT1-10RD/LED24, and JUT1-10RD/LA250.

Table with 2 columns: Model, Order Number. Row for JEB10-6 with order number 5 582 120.

Table with 2 columns: Model, Order Number. Row for JEBS10-16 with order number 5 582 140.

Table with 2 columns: Model, Order Number. Row for JFB10-16 with order number 5 585 150.

Table with 2 columns: Model, Order Number. Row for PSB4/4/7/6 with order number 8 573 102.

Table with 2 columns: Model, Order Number. Row for PS with order number 5 553 102.

Table with 2 columns: Model, Order Number. Row for ZB8 with order number 8 868 104.

Table with 2 columns: Model, Order Number. Row for ZB8 with order number 8 868 104.

工业配电接线端子-保险丝型端子系列
Industrial Distribution Terminal Blocks - Fuse type terminal series

保险丝型接线端子
保险丝型接线端子的电流由所安装的保险丝决定，电压由所选择的发光显示器决定。带发光显示的型号全在保险丝熔断时发出显示信号。

Fuse-type wiring terminal
The current of fuse terminal is determined by selected luminous display. The type with luminous indication would have indication signal when the fuse is broken down.

说明 Specification 简图 Schematic Drawing

端子 带通用安装在NS32 型，或NS35 型导轨上。Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

Table with 2 columns: Description, Diagram. Rows include end plate (1), side bracket components (2), central bracket components (3), test socket components (4), mark bar components (5), terminal fixed components (6), installation track (7), and terminal fixed components (8).

Table with 2 columns: Specification, Order Number. Row for JUT2-4RD with thickness/width/height and order number 8 050 208.

Table with 2 columns: Specification, Order Number. Row for JUT2-10RD with thickness/width/height and order number 8 050 209.

型号 Model 订货号 Order Number

Table with 2 columns: Model, Order Number. Rows for JUT2-4RD, JUT2-4RD/LED24, and JUT2-4RD/LA250.

型号 Model 订货号 Order Number

Table with 2 columns: Model, Order Number. Rows for JUT2-10RD, JEQ2-10RD, JEQ3-10RD, and JEQ10-10RD.

Table with 2 columns: Model, Order Number. Row for G-JUT2-4RD with order number 8 050 208.

Table with 2 columns: Model, Order Number. Row for G-JUT2-10RD with order number 8 050 209.

Table with 2 columns: Model, Order Number. Row for JEQ2-10RD with order number 5 582 222.

Table with 2 columns: Model, Order Number. Row for JEQ3-10RD with order number 5 582 223.

Table with 2 columns: Model, Order Number. Row for JEQ10-10RD with order number 5 582 220.

Table with 2 columns: Model, Order Number. Row for DEK5 with order number 8 868 201.

Table with 2 columns: Model, Order Number. Row for DEK5 with order number 8 868 201.

Table with 2 columns: Model, Order Number. Row for E/2 with order number 5 103 003.

Table with 2 columns: Model, Order Number. Row for E/2 with order number 5 103 003.

Table with 2 columns: Model, Order Number. Row for NS35/7.5 with order number 8 024 001.

Table with 2 columns: Model, Order Number. Row for NS35/7.5 with order number 8 024 001.

Table with 2 columns: Model, Order Number. Row for E/4 with order number 5 103 005.

Table with 2 columns: Model, Order Number. Row for E/4 with order number 5 103 005.

Table with 2 columns: Model, Order Number. Row for NS32/15 with order number 8 025 002.

Table with 2 columns: Model, Order Number. Row for NS32/15 with order number 8 025 002.



JUT3-6/RD(开发中)  
保险丝型接线端子 Fuse-type wiring terminal

|                                       |                  |
|---------------------------------------|------------------|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 12/86.5/56.5     |
| 适用于G型保险丝规格                            | 5 x 20; 6.3 x 32 |
| 刚性导线 (mm²)<br>Rigid cable             | 0.5-10           |
| 柔性导线 (mm²)<br>Soft cable              | 0.5-6            |
| AWG:24-8<br>IEC 60947-7-1             |                  |

说明 Specification 简图 Schematic Drawing

回拉式弹簧端子，可安装在NS35 L型导轨上。  
Return-pulling type spring terminal  
can be installed on tracks NS35 L-type

(1)端板 End plate



(2)插拔式桥接件，用于端子中央实现横向桥接，  
芯骨绝缘处可标示可分：2-位、3-位、10-位。  
Insert-pull type bridging component used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into 2-bit, 3-bit, 10-bit



(3)跨接取插件，可形成跳过某些端子需跳位置的跨接。  
Bridging leison component  
could form bridging by jumping  
some terminal position.



线分阻隔板：用于端子组间的视角  
及电气隔离。  
Segment spacer: for visual and electric  
separation between neigh-boring  
terminal groups.



(5)测试插头：形成测试连接。  
Test plug: forming test connection.



(6)螺丝刀  
Screwdriver



(7)操作工具：用于开启回拉式弹簧  
Operation tool: used to open  
returnpulling type spring.



扁平标记条：共10条，每条10位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



标识记录：有横向和竖向两种字体，10位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



(10)终端固定件：对端子排终端起固定件作用。  
Terminal fixed component: imposing fixed  
function on terminal row's  
termination, the mark clamp and mark  
strip can be blocked onto it for marking



型号 Model 订货号 Order Number

JUT3-6RD 5 574 332

JUT3-6RD/LED24 5 574 333  
带发光显示适用于电压  
The product with luminous  
display is applied to voltage of  
AC/DC:15-30V  
电流 current:1-2.5mA

JUT3-6RD/LA250 5 574 334  
带发光显示适用于电压  
The product with luminous  
display is applied to voltage of  
AC/DC:110-250V 电流 current:0.5-1.1mA

JFB10-16 5 585 150  
(中心联插件)  
Central adaptor

STF2-0.8 x 4 5 484 303

ZB8 8 868 104

E/3 5 103 003



JUT4-10RD  
熔断器型接线端子

|                                       |          |
|---------------------------------------|----------|
| 厚 / 宽 / 高<br>Thickness/Width / Height | 13/54/53 |
| 刚性导线 (mm²)<br>Rigid cable             | 0.5-6    |
| 柔性导线 (mm²)<br>Soft cable              | 0.5-4    |
| AWG:24-10<br>IEC 60947-7-1            | 41 800   |

说明 Specification 简图 Schematic Drawing

端子：可安装在NS32/15-AL L型导轨上。  
Terminal: can be installed on tracks NS32/15-1L L-type

(1)端板 End plate



线分阻隔板：用于端子组间的视角  
及电气隔离。  
Segment spacer: for visual and electric  
separation between neigh-boring  
terminal groups.



(3)中心联插件：用于端子中央，实  
现横向桥接，可分：2-位、3-位、5-位、10-位。  
Central adaptor: used at the center  
of terminal for transverse bridge  
connector, which is divided into:  
2-digit, 3-digit, 5-digit and 10-digit



(4)测试插座：与测试插头形成测试连接。  
Test socket: to form a testing connection  
by using test plug.



(5)测试插头：形成测试连接。  
Test plug: forming test connection.



(6)标记牌 Mark bar



(7)终端固定件：对端子排终端起固定件作用。  
Terminal fixed component: imposing fixed  
function on terminal row's  
termination.



(8)安装轨( NS32/15-AL)  
Installation track (NS32/15-AL)



JUT4-10RD 5 574 409

JUT4-10RD/LED 5 574 410  
带发光显示适用于电压  
The product with luminous display is ap-  
plied to voltage being AC/DC:10-250V  
电流 current:0.5-1mA

G-JUT4-10RD 8 750 405

JAH-10RD 8 750 405

JFH-10RD 5 584 405

PSB4/7/6 8 573 102

PS 5 553 102

HZB9 8 868 402

E/4 5 103 005

NS32/15-AL 8 025 002



JUT1-50T
直角型接线端子 Right-angle wiring terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT1-50T该端子结构独特，两接线端的绝缘件采用了分体独立结构，直角型的导电片将端子两接线端连成一体，使端子即可用于N线连接，也可用于进出线端要求空间位置呈直角的特殊连接。

The structure of this terminal is special, the insulation component of two wiring terminal adopts separate-body independent structure, right-angle electrical conduction slice connects two-wiring terminal directly able to be used for being N wire connection and special link in special case of wiring-in/out terminal needing right-angle for space position.

说明 Specification 简图 Schematic Drawing

端子：带通用安装在NS32 C型，或NS35 L型导轨上。
Terminal: with general-purpose mounting facet, can be installed on tracks NS32 C or NS35 L.

(1) 端板 End plate

封闭型外壳，不用端板。
Sealed outer-case, don't need end plate

Ø中心联线件：用于端子中央，实现横向桥接。螺钉头带绝缘圈，可分：2-位、3-位、5-位、10-位。
Central adaptor used at the center of terminal for transverse bridge connection, and screw head with insulated ring which is divided into: 2-digit, 3-digit, 5-digit and 10-digit.



Ø侧边式联线件：全绝缘2位、全绝缘3位、全绝缘10位。
Side adaptor: Full insulation in: 2digit, Full insulation in 3digit, Full insulation in 10 digit.

ZB10
标记条
Mark bar



JUT4B-4/2
基座型二位接线端子 base-type two-bit terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/2 5 574 421



JUT4B-4/3
基座型三位接线端子 base-type three-bit terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/3 5 574 422



JUT4B-4/5
基座型五位接线端子 base-type five-bit terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/5 5 574 423



JUT4B-4/12
基座型十二位接线端子 base-type two-bit terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/12 5 574 424



JUT4B-4/6
六位接线端子 SIX-bit wiring terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/6 5 574 431



JUT4B-4/10
十位接线端子 ten-bit wiring terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/10 5 574 432



JUT4BP-4/12
十二位接线端子 twelve-bit wiring terminal

Table with 4 columns: Thickness/Width/Height, Rigid cable, Soft cable, and Current/Voltage ratings.

Table with 2 columns: Model and Order Number.

JUT4B-4/12 5 574 433

工业配电接线端子-基座型接线端子系列

Industrial Distribution Terminal Blocks – Base type terminal series

结构特征

JUT5系列大电流接线分接端子由绝缘基座、接线框、防护罩三部分组成。接线框由导电夹、螺钉、螺母和支承框组成。导电夹与导线接触面呈包容型的大牙交错结构，具有接触面大，压接可靠的特点。通过不同形状的导电夹的相互组合，使其不仅具有通用型接线端子的一般功能，还可派生出大电流分接端子和母线排接线端子。能满足所有电控配电、成套装置中的大截面导线连接和导线的分接等各种用途。

Structure's properties

JUT5 series of great-current wiring/tapping terminal is composed of insulation base, wiring frame, protection cover. The wiring frame is composed of electrical conduction clamp, screw, nut and support frame, the conduction-clamp and lead contacted-face and reliable pressing/connection. With mutual combination of different-shape conduction clamp, this terminal not only owns common function of universal wiring terminal and bus row wiring terminal, which could realize big section lead connection in all electric-construction, complete sets appliance, tapping operation of lead etc.

| 型号<br>Mode | 形式<br>Mould                                                                  | 压线范围 (mm²)<br>Wire-pressing scope (mm²)         | 外形尺寸 (厚/宽/高mm)<br>Appearance dimension (deep/witth/high) | 订货号<br>Order Number |
|------------|------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------------|---------------------|
| JUT5-95    | 一路进 (电缆) 一路出 (电缆) 图1<br>1*circuit in (cable) 1*circuit out (cable)           | 16-95                                           | 31 x N+9/115/76(93)                                      | 5 574 501           |
| JUT5-95B   | 一路进 (铜排) 一路出 (铜排) 图2<br>1*circuit in (copper row) 1*circuit out (copper row) | 铜排宽 ≤ 18<br>copper-plate's width ≤ 18           | 31 x N+9/115/76(93)                                      | 5 574 502           |
| JUT5-95C   | 一路进 (铜排) 一路出 (电缆) 图2图1<br>1*circuit in (copper row) 1*circuit out (cable)    | 进 (宽 ≤ 18) 出 16-95<br>in (width ≤ 18) out 16-95 | 31 x N+9/115/76(93)                                      | 5 574 503           |
| JUT5-95D   | 一路进 (电缆) 二路出 (电缆) 图1图3<br>1*circuit in (cable) 2*circuit out (cable)         | 进 16-95 出 16-50<br>in 16-95 out 16-50           | 31 x N+9/140/88(105)                                     | 5 574 504           |
| JUT5-95E   | 一路进 (铜排) 二路出 (电缆) 图2图3<br>1*circuit in (copper row) 2*circuit out (cable)    | 进 (宽 ≤ 18) 出 16-50<br>in (width ≤ 18) out 16-50 | 31 x N+9/140/88(105)                                     | 5 574 505           |
| JUT5-95F   | 一路进 (电缆) 四路出 (电缆) 图1图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 16-95 出 10-25<br>in 16-95 out 10-25           | 31 x N+9/140/88(105)                                     | 5 574 506           |
| JUT5-95G   | 一路进 (铜排) 四路出 (电缆) 图2图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 (宽 ≤ 18) 出 10-25<br>in (width ≤ 18) out 10-25 | 31 x N+9/140/88(105)                                     | 5 574 507           |
| JUT5-95H   | 一路进 (电缆) 六路出 (电缆) 图4图5<br>1*circuit in (cable) 6*circuit out (cable)         | 进 16-95 出 10-25<br>in 16-95 out 20-25           | 31 x N+9/140/88(105)                                     | 5 574 508           |
| JUT5-95J   | 一路进 (电缆) 二路出 (电缆) 图3<br>2*circuit in (cable) 2*circuit out (cable)           | 进 16-95 出 16-95<br>in 16-95 out 16-95           | 31 x N+9/140/88(105)                                     | 5 574 509           |
| JUT5-95K   | 二路进 (电缆) 四路出 (电缆) 图3图5<br>2*circuit in (cable) 4*circuit out (cable)         | 进 16-95 出 10-25<br>in 16-95 out 10-25           | 31 x N+9/140/88(105)                                     | 5 574 510           |



**JUT5-95**

额定参数  
rated parameter  
电流/电压 160/1000 (A/V)  
current/voltage  
接线容量 16-95 (mm²)  
Wiring capacity  
A.W.G 4-000  
安装螺钉  
installment screw M5 (mm)

| 型号<br>Mode | 形式<br>Mould                                                                  | 压线范围 (mm²)<br>Wire-pressing scope (mm²)           | 外形尺寸 (厚/宽/高mm)<br>Appearance dimension (deep/witth/high) | 订货号<br>Order Number |
|------------|------------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------|---------------------|
| JUT5-150   | 一路进 (电缆) 一路出 (电缆) 图1<br>1*circuit in (cable) 1*circuit out (cable)           | 25-150                                            | 31 x N+9/115/88(105)                                     | 5 574 511           |
| JUT5-150B  | 一路进 (铜排) 一路出 (铜排) 图2<br>1*circuit in (copper row) 1*circuit out (copper row) | 铜排宽 ≤ 18<br>copper-plate's width ≤ 18             | 31 x N+9/115/88(105)                                     | 5 574 512           |
| JUT5-150C  | 一路进 (铜排) 一路出 (电缆) 图2图1<br>1*circuit in (copper row) 1*circuit out (cable)    | 进 (宽 ≤ 18) 出 25-150<br>in (width ≤ 18) out 25-150 | 31 x N+9/115/88(105)                                     | 5 574 513           |
| JUT5-150D  | 一路进 (电缆) 二路出 (电缆) 图1图3<br>1*circuit in (cable) 2*circuit out (cable)         | 进 25-150 出 16-70<br>in 16-95 out 16-70            | 46 x N+9/115/103(120)                                    | 5 574 514           |
| JUT5-150E  | 一路进 (铜排) 二路出 (电缆) 图2图3<br>1*circuit in (copper row) 2*circuit out (cable)    | 进 (宽 ≤ 25) 出 16-70<br>in (width ≤ 18) out 16-70   | 46 x N+9/115/103(120)                                    | 5 574 515           |
| JUT5-150F  | 一路进 (电缆) 四路出 (电缆) 图1图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 25-150 出 10-35<br>in 25-150 out 10-35           | 46 x N+9/115/103(120)                                    | 5 574 516           |
| JUT5-150G  | 一路进 (铜排) 四路出 (电缆) 图2图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 (宽 ≤ 25) 出 10-35<br>in (width ≤ 18) out 10-35   | 46 x N+9/115/103(120)                                    | 5 574 517           |
| JUT5-150H  | 一路进 (电缆) 六路出 (电缆) 图4图5<br>1*circuit in (cable) 6*circuit out (cable)         | 进 25-150 出 10-35<br>in 25-150 out 10-35           | 46 x N+9/115/103(120)                                    | 5 574 518           |
| JUT5-150J  | 一路进 (电缆) 二路出 (电缆) 图3<br>2*circuit in (cable) 2*circuit out (cable)           | 进 25-150 出 25-150<br>in 25-150 out 25-150         | 46 x N+9/115/103(120)                                    | 5 574 519           |
| JUT5-150K  | 二路进 (电缆) 四路出 (电缆) 图3图5<br>2*circuit in (cable) 4*circuit out (cable)         | 进 25-150 出 10-35<br>in 25-150 out 10-35           | 46 x N+9/115/103(120)                                    | 5 574 520           |




**JUT5-150**

额定参数  
rated parameter  
电流/电压 250/1000 (A/V)  
current/voltage  
接线容量 25-150 (mm²)  
Wiring capacity  
A.W.G 2-300MCM  
安装螺钉  
installment screw M5 (mm)

工业配电接线端子-基座型接线端子系列

Industrial Distribution Terminal Blocks – Base type terminal series

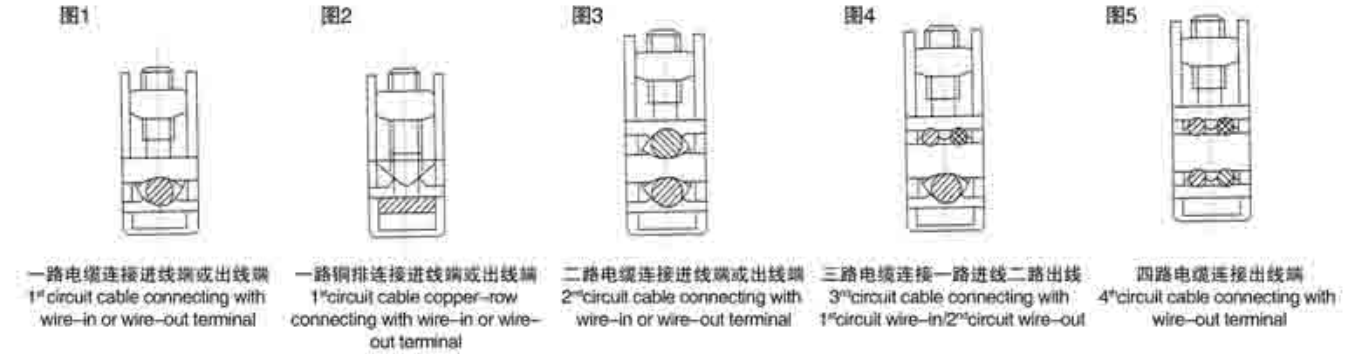

| 型号<br>Mode | 形式<br>Mould                                                                  | 压线范围 (mm²)<br>Wire-pressing scope (mm²)           | 外形尺寸 (厚/宽/高mm)<br>Appearance dimension (deep/witth/high) | 订货号<br>Order Number |
|------------|------------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------|---------------------|
| JUT5-240   | 一路进 (电缆) 一路出 (电缆) 图1<br>1*circuit in (cable) 1*circuit out (cable)           | 35-240                                            | 46 x N+9/115/103(120)                                    | 5 574 521           |
| JUT5-240B  | 一路进 (铜排) 一路出 (铜排) 图2<br>1*circuit in (copper row) 1*circuit out (copper row) | 铜排宽 ≤ 25<br>copper-plate's width ≤ 18             | 46 x N+9/115/103(120)                                    | 5 574 522           |
| JUT5-240C  | 一路进 (铜排) 一路出 (电缆) 图2图1<br>1*circuit in (copper row) 1*circuit out (cable)    | 进 (宽 ≤ 25) 出 35-240<br>in (width ≤ 25) out 35-240 | 46 x N+9/115/103(120)                                    | 5 574 523           |
| JUT5-240D  | 一路进 (电缆) 二路出 (电缆) 图1图3<br>1*circuit in (cable) 2*circuit out (cable)         | 进 35-240 出 35-240<br>in 35-240 out 25-120         | 62 x N+9/140/110(127)                                    | 5 574 524           |
| JUT5-240E  | 一路进 (铜排) 二路出 (电缆) 图2图3<br>1*circuit in (copper row) 2*circuit out (cable)    | 进 (宽 ≤ 25) 出 25-120<br>in (width ≤ 25) out 25-120 | 62 x N+9/140/110(127)                                    | 5 574 525           |
| JUT5-240F  | 一路进 (电缆) 四路出 (电缆) 图1图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 35-240 出 16-70<br>in 35-240 out 16-70           | 62 x N+9/140/110(127)                                    | 5 574 526           |
| JUT5-240G  | 一路进 (铜排) 四路出 (电缆) 图2图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 (宽 ≤ 25) 出 16-70<br>in (width ≤ 25) out 16-70   | 62 x N+9/140/110(127)                                    | 5 574 527           |
| JUT5-240H  | 一路进 (电缆) 六路出 (电缆) 图4图5<br>1*circuit in (cable) 6*circuit out (cable)         | 进 35-240 出 16-70<br>in 35-240 out 16-70           | 62 x N+9/140/110(127)                                    | 5 574 528           |
| JUT5-240J  | 一路进 (电缆) 二路出 (电缆) 图3<br>2*circuit in (cable) 2*circuit out (cable)           | 进 35-240 出 35-240<br>in 35-240 out 35-240         | 62 x N+9/140/110(127)                                    | 5 574 529           |
| JUT5-240K  | 二路进 (电缆) 四路出 (电缆) 图3图5<br>2*circuit in (cable) 4*circuit out (cable)         | 进 35-240 出 60-70<br>in 35-240 out 60-70           | 62 x N+9/140/110(127)                                    | 5 574 530           |



**JUT5-240**

额定参数  
rated parameter  
电流/电压 400/1000 (A/V)  
current/voltage  
接线容量 35-240 (mm²)  
Wiring capacity  
A.W.G 2-400MCM  
安装螺钉  
installment screw M6 (mm)

| 型号<br>Mode | 形式<br>Mould                                                                  | 压线范围 (mm²)<br>Wire-pressing scope (mm²)           | 外形尺寸 (厚/宽/高mm)<br>Appearance dimension (deep/witth/high) | 订货号<br>Order Number |
|------------|------------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------|---------------------|
| JUT5-300   | 一路进 (电缆) 一路出 (电缆) 图1<br>1*circuit in (cable) 1*circuit out (cable)           | 50-300                                            | 62 x N+10/140/110(127)                                   | 5 574 531           |
| JUT5-300B  | 一路进 (铜排) 一路出 (铜排) 图2<br>1*circuit in (copper row) 1*circuit out (copper row) | 铜排宽 ≤ 30<br>copper-plate's width ≤ 30             | 62 x N+10/140/110(127)                                   | 5 574 532           |
| JUT5-300C  | 一路进 (铜排) 一路出 (电缆) 图2图1<br>1*circuit in (copper row) 1*circuit out (cable)    | 进 (宽 ≤ 30) 出 50-300<br>in (width ≤ 30) out 50-300 | 62 x N+10/140/110(127)                                   | 5 574 533           |
| JUT5-300D  | 一路进 (电缆) 二路出 (电缆) 图1图3<br>1*circuit in (cable) 2*circuit out (cable)         | 进 50-300 出 25-150<br>in 50-300 out 25-150         | 72 x N+10/140/137(166)                                   | 5 574 534           |
| JUT5-300E  | 一路进 (铜排) 二路出 (电缆) 图2图3<br>1*circuit in (copper row) 2*circuit out (cable)    | 进 (宽 ≤ 30) 出 25-150<br>in (width ≤ 30) out 25-150 | 72 x N+10/140/137(166)                                   | 5 574 535           |
| JUT5-300F  | 一路进 (电缆) 四路出 (电缆) 图1图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 50-300 出 16-95<br>in 50-300 out 16-95           | 72 x N+10/140/137(166)                                   | 5 574 536           |
| JUT5-300G  | 一路进 (铜排) 四路出 (电缆) 图2图5<br>1*circuit in (cable) 4*circuit out (cable)         | 进 (宽 ≤ 30) 出 16-95<br>in (width ≤ 30) out 16-95   | 72 x N+10/140/137(166)                                   | 5 574 537           |
| JUT5-300H  | 一路进 (电缆) 六路出 (电缆) 图4图5<br>1*circuit in (cable) 6*circuit out (cable)         | 进 50-300 出 16-95<br>in 50-300 out 16-95           | 72 x N+10/140/137(166)                                   | 5 574 538           |
| JUT5-300J  | 一路进 (电缆) 二路出 (电缆) 图3<br>2*circuit in (cable) 2*circuit out (cable)           | 进 50-300 出 50-300<br>in 50-300 out 20-300         | 72 x N+10/140/137(166)                                   | 5 574 539           |
| JUT5-300K  | 二路进 (电缆) 四路出 (电缆) 图3图5<br>2*circuit in (cable) 4*circuit out (cable)         | 进 50-300 出 16-95<br>in 50-300 out 16-95           | 72 x N+10/140/137(166)                                   | 5 574 540           |




**JUT5-300**

额定参数  
rated parameter  
电流/电压 630/1000 (A/V)  
current/voltage  
接线容量 50-300 (mm²)  
Wiring capacity  
A.W.G 1-500MCM  
安装螺钉  
installment screw M6 (mm)

工业配电接线端子-基座型接线端子系列  
Industrial Distribution Terminal Blocks - Base type terminal series

| 三位大电流接线端子<br>3-bit great current wiring terminal                                  |                                                 | JUT603     | JUT6-1003  |
|-----------------------------------------------------------------------------------|-------------------------------------------------|------------|------------|
|  | 订货号Order Number                                 | 5 574 601  | 5 574 603  |
|                                                                                   | 电流 / 电压<br>current/voltage (A/V)                | 76/690     | 101/690    |
|                                                                                   | 极数 / 导线截面<br>pole quantity lead section (极/mm²) | 3/16 AWG:6 | 3/25 AWG:4 |
|                                                                                   | 安装螺钉<br>installment screw (mm)                  | M6         | M6         |
| 四位大电流接线端子<br>4-bit great current wiring terminal                                  |                                                 | JUT6-604   | JUT6-1004  |
|  | 订货号Order Number                                 | 5 574 602  | 5 574 604  |
|                                                                                   | 电流 / 电压<br>current/voltage (A/V)                | 76/690     | 101/690    |
|                                                                                   | 极数 / 导线截面<br>pole quantity lead section (极/mm²) | 4/16 AWG:6 | 4/25 AWG:4 |
|                                                                                   | 安装螺钉<br>installment screw (mm)                  | M6         | M8         |

JUT6端子外形尺寸  
JUT6 terminal appearance dimension



JUT7螺钉式组合型接线端子排系列  
JUT7 Screw combination-type wiring terminal row series

| 螺钉式多极接线端子<br>screw-type many-pole wiring terminal                                   |                                                                    | JUT7-2.5/2C*      | JUT7-2.5/3C    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------|----------------|
|  | 订货号Order Number                                                    | 5 574 701         | 5 574 702      |
|                                                                                     | L / W / 宽 □ 高 + 盖高<br>thickness/W/width □ height+cover height (mm) | 20/8/40/34+2      | 25/6.7/40/34+2 |
|                                                                                     | 电流/电压<br>current/voltage (A/V)                                     | 24/690            | 24/690         |
|                                                                                     | 极数/导线截面<br>pole quantity lead section (极/mm²)                      | 2/2.5 AWG:14      | 3/2.5 AWG:14   |
|  | 安装螺钉<br>installment screw (mm)                                     | M3                | M3             |
|                                                                                     | 螺钉式单极接线端子<br>screw-type single-pole wiring terminal                | JUT-710C          | JUT-16C        |
|                                                                                     | 订货号Order Number                                                    | 5 574 711         | 5 574 712      |
|                                                                                     | L / W / 宽 □ 高 + 盖高<br>thickness/W/width □ height+cover height (mm) | 15.5/13.5/45/38+2 | 22/18/56/38+2  |
|  | 电流/电压<br>current/voltage (A/V)                                     | 57/690            | 76/690         |
|                                                                                     | 极数 / 导线截面<br>pole quantity lead section (极/mm²)                    | -/10 AWG:8        | -/16 AWG:6     |
|                                                                                     | 安装螺钉<br>installment screw (mm)                                     | M4                | M6             |

\*JUT7-2.5/2C 表示带盖罩, JUT7-2.5/2表示不带盖罩。  
JUT7-2.5/2C means with-cover, JUT7-2.5/2 means without-cover



工业配电接线端子-基座型接线端子系列  
Industrial Distribution Terminal Blocks - Base type terminal series

| JUT6-1503  | JUT6-2003        | JUT6-3003        | JUT6-4003        |
|------------|------------------|------------------|------------------|
| 5 574 605  | 5 574 607        | 5 574 609        | 5 574 611        |
| 150/690    | 232/690          | 309/690          | 415/690          |
| 3/50 AWG:0 | 3/120 AWG:250MCM | 3/150 AWG:300MCM | 3/240 AWG:500MCM |
| M8         | M8               | M10              | M12              |
| JUT6-1504  | JUT6-2004        | JUT6-3004        | JUT6-4004        |
| 5 574 606  | 5 574 608        | 5 574 610        | 5 574 612        |
| 150/690    | 232/690          | 309/690          | 415/690          |
| 4/50 AWG:0 | 4/120 AWG:250    | 4/150 AWG:300MCM | 4/240 AWG:500MAM |
| M8         | M8               | M10              | M12              |

| 型号<br>Model | 尺寸 Dimension |      |      |      |      |
|-------------|--------------|------|------|------|------|
|             | L            | B    | H    | A    | W    |
| JUT6-603    | 86.5         | 42.7 | 31   | 25.5 | 17   |
| JUT6-1003   | 113.5        | 55.2 | 36.3 | 28.0 | 22.5 |
| JUT6-1503   | 115          | 67   | 40   | 30.5 | 25.3 |
| JUT6-2003   | 133          | 72.1 | 44.4 | 34   | 28.3 |
| JUT6-3003   | 164          | 89.4 | 50.6 | 47.5 | 30   |
| JUT6-4003   | 164          | 89.4 | 50.6 | 47.5 | 36   |

| 型号<br>Model | 尺寸 Dimension |      |      |      |      |
|-------------|--------------|------|------|------|------|
|             | L            | B    | H    | A    | W    |
| JUT6-604    | 115          | 42.7 | 31   | 25.5 | 17   |
| JUT6-1004   | 137.5        | 55.2 | 36.3 | 28.0 | 22.5 |
| JUT6-1504   | 153          | 67   | 40   | 30.5 | 25.3 |
| JUT6-2004   | 177          | 72.1 | 44.4 | 34   | 28.3 |
| JUT6-3004   | 218          | 89.4 | 50.6 | 47.5 | 30   |
| JUT6-4004   | 218          | 89.4 | 50.6 | 47.5 | 36   |

|                |                |
|----------------|----------------|
| JUT7-4/3C      | JUT7-6/3C      |
| 5 574 703      | 5 574 704      |
| 35/9.7/40/34+2 | 43/9.7/45/38+2 |
| 32/690         | 41/690         |
| 3/4 AWG:12     | 3/6 AWG:10     |
| M3.5           | M4             |

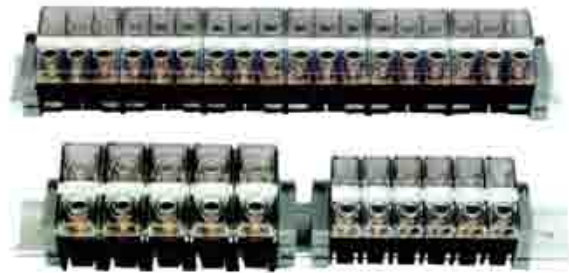

|                 |                 |                    |
|-----------------|-----------------|--------------------|
| JUT7-35C        | JUT7-95C        | JUT7-150C          |
| 5 574 713       | 5 574 714       | 5 574 715          |
| 32/24/75/49+2.5 | 39/31/86/61+2.5 | 62/52.3/125/77+3.5 |
| 125/690         | 232/690         | 309/690            |
| -/35 AWG:2      | -/95 AWG:000    | -/150 AWG:300MCM   |
| M6              | M8              | M10                |

固定件/安装轨 Fixed component/installment track



| 名称appellation        | 型号Mode      | 订货号Order Number |
|----------------------|-------------|-----------------|
| 固定件Fixed component   | E7          | 5 103 008       |
| 安装轨installment track | NS35/7.5-AL | 8 024 002       |

工业配电接线端子-基座型接线端子系列
Industrial Distribution Terminal Blocks – Base type terminal series

在电气设备的电气线路中，经常会将中线（N线）、地线（PE线）或相线（L线）接到中央汇流条上。因此必须对导线及端子与相应回的所属关系作出明确标识。
JUT8系列能从两个方面满足上述要求。


可对每个端子分别进行标识。

端子具有蓝色（N线）、黄绿线（PE线）、黑色（L线）三种标识。

In the electrical wire of electrical equipment, operator often connects neutral line(N), earth line(PE) or looks-line (L) onto center junction strip, so operator should clearly mark the ownership relationship of lead, terminal and corresponding circuit. JUT8 series could meet above demand from two aspects: could mark separately every terminal, terminal has blue(neutral line), yellow/green (earth line), black(looks-line) three identifications.



L/N/PE接线端子L/N/PE wiring terminal

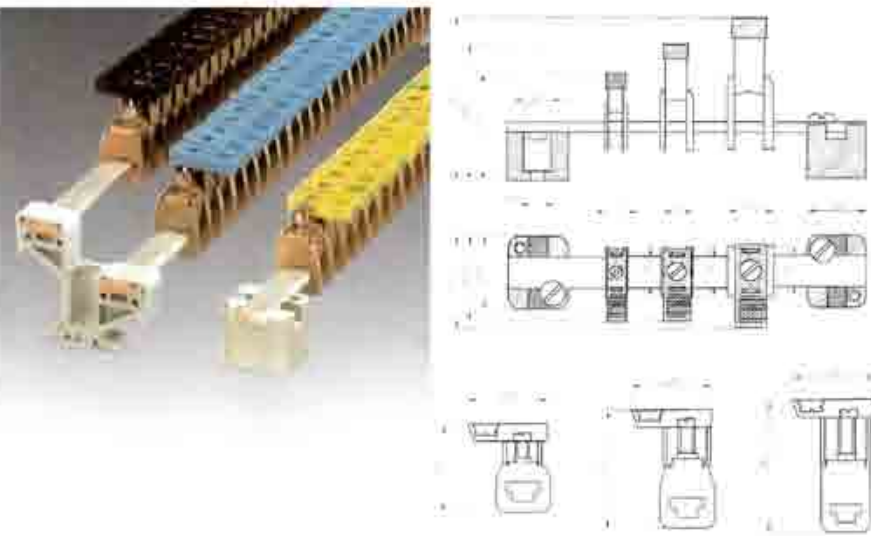

JUT8 JUT8-16 JUT8-35

说明 Specification 简图 Schematic Drawing

端子：铜制件，镀锡。安装在N线汇流条上。
Terminal: made of copper, nickel plating suspend-connected on N line's junction strip.

(1)N线汇流条：铜制件，镀锡。3×10mm, 10m长。
N line's junction strip, made of copper, nickel plating, 3×10mm, with 1m length.



(2)双垫块：由绝缘材料制成。
Double-heel: made of insulation material.



(3)垫块：由绝缘材料制成。
Heel: made of insulation material.



(4)支架：带通用安装脚可安装在C型、或L型导轨上。
Support: with universal installment foot, it could be installed on C type or L type track.



(5)标记条：10位
Mark strip: 10bits



Table with 4 columns: Model, Order Number, and specifications for JUT8-4, JUT8-16, and JUT8-35. It includes details about cable types (rigid/soft), cross-sections, and current ratings.

导轨用终端固定件
Pieces with a fixed rail terminal



E/1



E/1A



E/1B



E/1E



E/2



E/3



E/4

产品端盖  
Product cover



G-JUT1-2.5S



G-UT1-2.5/4(T)



G-UT1-2.5/4(T)



G-JUT1-2.5/4Q



DP-JUT1-2.5/4Q



G-JUT1-4/1-2



G-JUT1-4/2-2



G-JUT1-6S



G-JUT2-2.5



G-JUT2-4/2



G-JUT2-4/10



G-JUT2-4RD



G-JUT2-6S1



G-JUT2-16



G-JUT2-35



TW2.5



TW4/10



G-JUT3-1.5/2.5



G-JUT3-2.5/2



G-JUT3-2.5/1-2



G-JUT3-2.5/2-2



G-JUT3-4



G-JUT3-4 /2-2



JAP-6S



JAP

快速标记条  
Quick Tag bar



ZB4



ZB5



ZB6



ZB8



ZB10



DEK5



ZBFM4



ZBFM5



ZBFM6



ZBFM8




JUT4-B



JUT2-3B


JUT2-5B

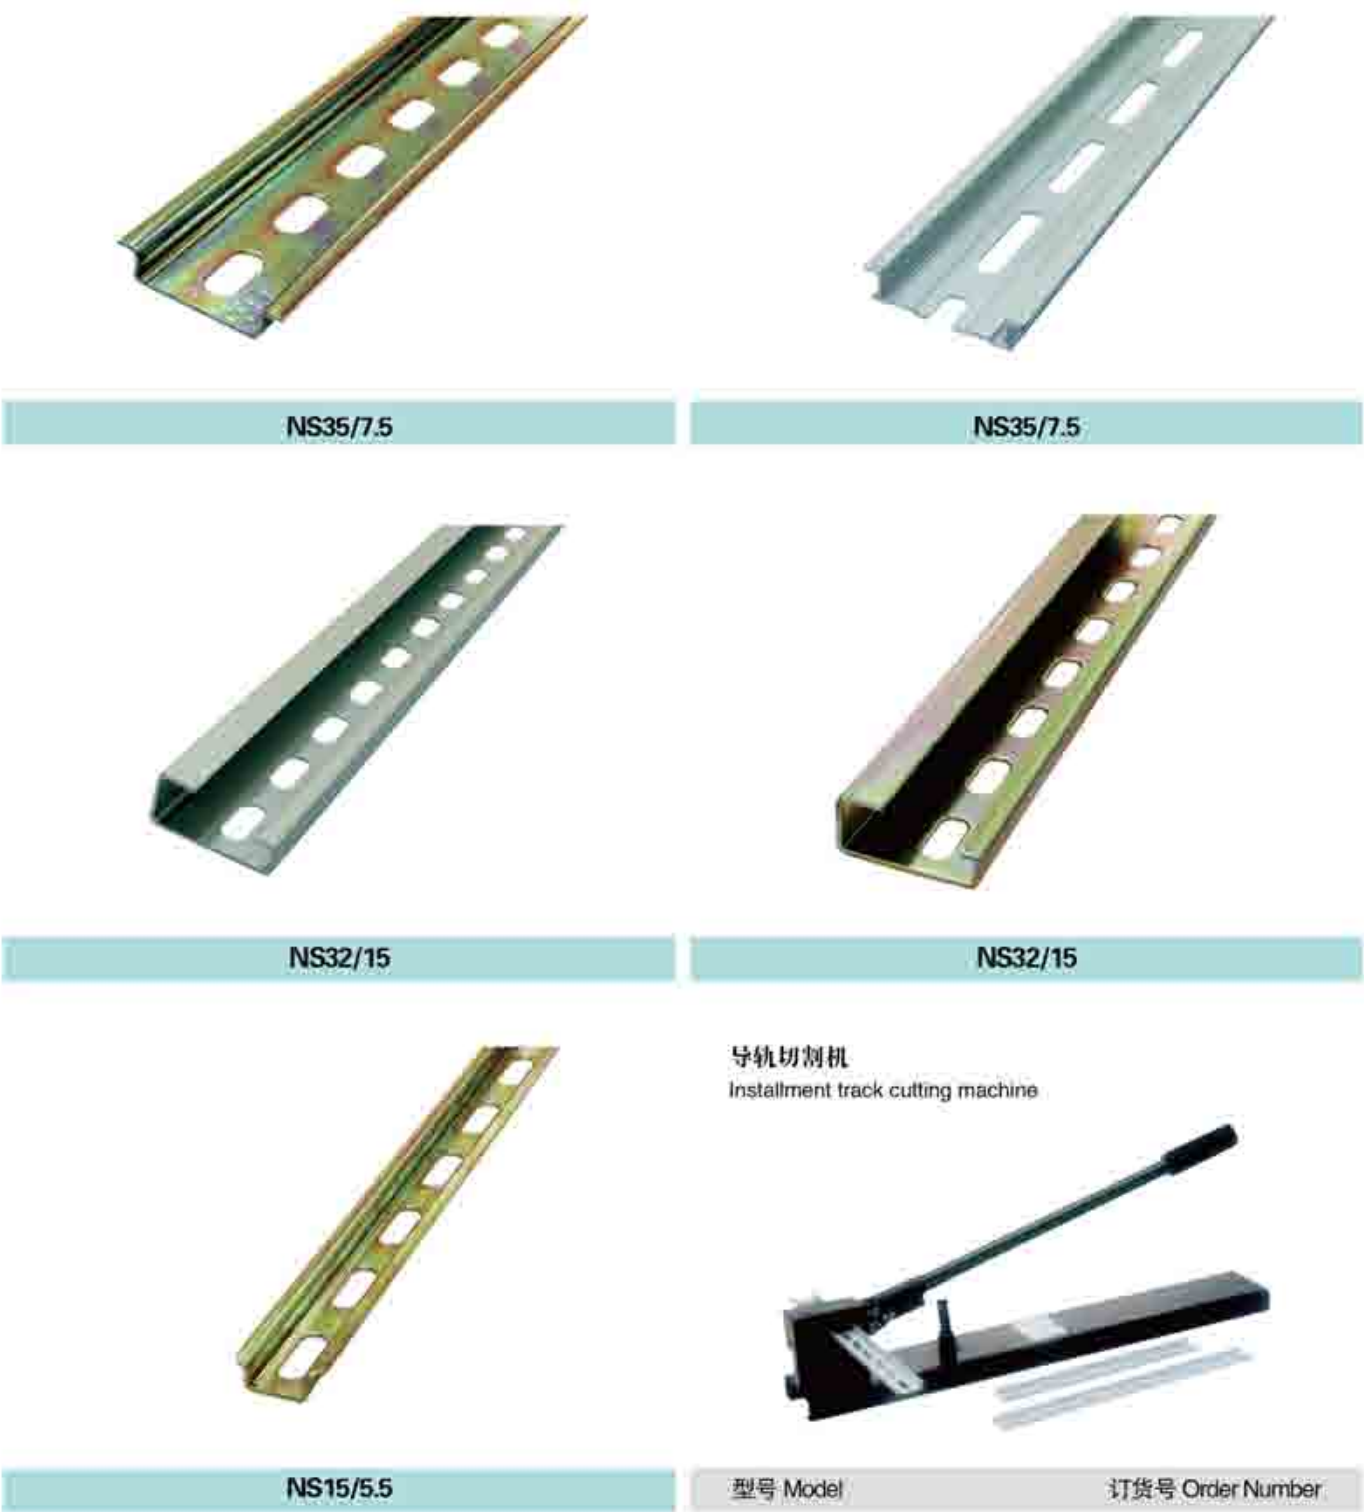

导轨切割机  
Installment track cutting machine

| 型号 Model | 订货号 Order Number |
|----------|------------------|
| JUTDR2   | 8 026 001        |
| JUTDR4   | 8 026 002        |

导轨切割机的特点：设计新颖，结构合理。省力、特殊设计的刀模，使切断面平整、无毛刺。  
用途：适用于钢或铝合金材质导轨的切断作业。  
The properties of guide-track cut-off machine: creatable/new design, rational structure, economizing labor, the knife-model of special design can mak cutting surface and non-rag.  
Usage: used for cutting operation of steel or Al alloy guide track.

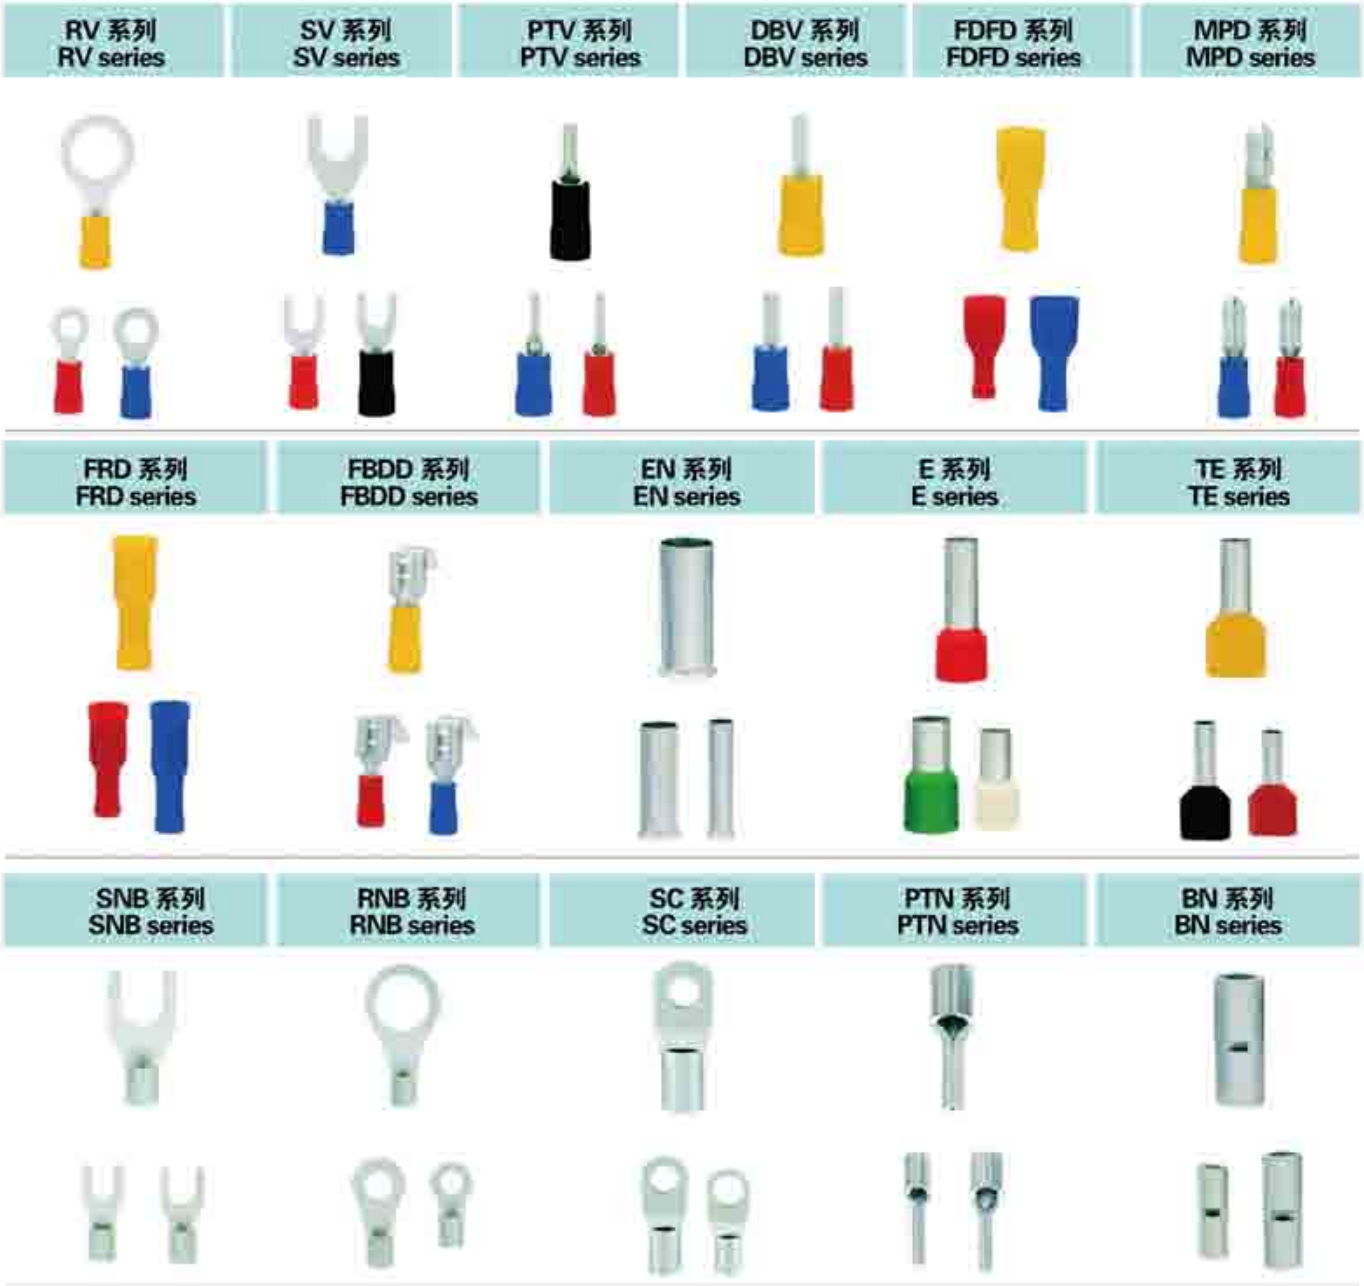

冷压接端头型号及其含义  
Could press-connection header type and its meaning




说明：RNBS代表小号未接缝裸圆形端头  
Instruction:RNBS stands for small size non-joint exposed round header

端头字母含义说明  
Header alphabet's meaning instruction

|      |                                                          |
|------|----------------------------------------------------------|
| R    | 圆形端头 Round header                                        |
| E    | 管形端头 Pipe-shape header                                   |
| S    | 叉形端头 Fork-shape header                                   |
| H    | 钩形端头 hook-shape header                                   |
| PT   | 针形端头 Needle-shape header                                 |
| BV   | 长形中间接头 Long-shape middle connector                       |
| FDFD | 母全绝缘接头Female whole-insulation connector                  |
| MP   | 子弹型公接头 Bullet-type F and m connector                     |
| FR   | 子弹型母接头 shoulder-type F and m connector                   |
| FBD  | 肩背型公母接头 shoulder-type F and m connector                  |
| N    | 裸端头Exposed header                                        |
| NB   | 未接缝裸端头Non-joint exposed header                           |
| V    | 带绝缘套(预绝缘)端头 Header with insulation-cover(pre-insulation) |

导线用冷压接头  
Wire connected with the cold ends


管形裸端头 (EN型)  
pipe-shape exposed header(EN type)

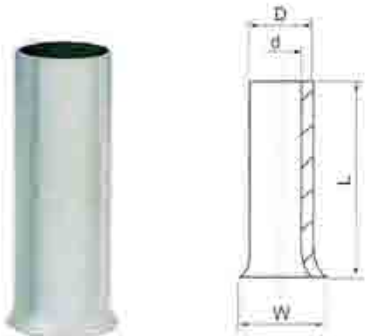

| 型号<br>Model | 订货号<br>Order Number | 尺寸 Dimension |      |      |      |  | 导线截面<br>lead section |                 |
|-------------|---------------------|--------------|------|------|------|--|----------------------|-----------------|
|             |                     | L            | D    | d    | W    |  | AWG                  | mm <sup>2</sup> |
| EN0508      | 8 570 101           | 8            | 1.3  | 1.0  | 1.7  |  | 22#                  | 0.5             |
| EN7508      | 8 570 102           | 8            | 1.5  | 1.2  | 1.9  |  | 20#                  | 0.75            |
| EN1008      | 8 570 103           | 8            | 1.7  | 1.4  | 2.2  |  | 18#                  | 1.0             |
| EN1508      | 8 570 104           | 8            | 2.0  | 1.7  | 2.5  |  | 16#                  | 1.5             |
| EN2508      | 8 570 105           | 8            | 2.6  | 2.2  | 3.3  |  | 14#                  | 2.5             |
| EN4009      | 8 570 106           | 9            | 3.2  | 2.8  | 3.9  |  | 12#                  | 4.0             |
| EN6010      | 8 570 107           | 10           | 3.9  | 3.5  | 4.8  |  | 10#                  | 6.0             |
| EN10-12     | 8 570 108           | 12           | 4.9  | 4.5  | 5.8  |  | 7#                   | 10              |
| EN16-12     | 8 570 109           | 12           | 6.2  | 5.8  | 7.2  |  | 5#                   | 16              |
| EN25-16     | 8 570 110           | 16           | 7.9  | 7.5  | 9.1  |  | 4#                   | 25              |
| EN35-16     | 8 570 111           | 16           | 8.7  | 8.3  | 10.2 |  | 2#                   | 35              |
| EN50-25     | 8 570 112           | 25           | 10.9 | 10.3 | 12.4 |  | 1#                   | 50              |

最大耐压:  $U_i=300$ 伏 材质: 紫铜管 绝缘材质: 尼龙  
Maximum voltage:  $U_i=300$ V Material: red copper-pipe Insulation material: nylon

管形预绝缘端头 (E型)  
pipe-type pre-insulation header(E type)

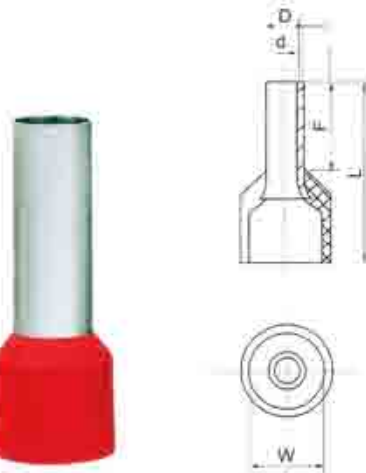

| 型号<br>Model | 订货号<br>Order Number | 尺寸 Dimension |      |      |      |      | 导线截面<br>lead section |                 |
|-------------|---------------------|--------------|------|------|------|------|----------------------|-----------------|
|             |                     | F            | L    | D    | d    | W    | AWG                  | mm <sup>2</sup> |
| E0508       | 8 570 131           | 8            | 14   | 1.3  | 1.0  | 2.6  | 22#                  | 0.5             |
| E7508       | 8 570 132           | 8            | 14.6 | 1.5  | 1.2  | 2.8  | 20#                  | 0.75            |
| E1008       | 8 570 133           | 8            | 14.6 | 1.7  | 1.4  | 3.0  | 18#                  | 1.0             |
| E1508       | 8 570 134           | 8            | 14.6 | 2.0  | 1.7  | 3.5  | 16#                  | 1.5             |
| E2508       | 8 570 135           | 8            | 15.2 | 2.6  | 2.3  | 4.0  | 14#                  | 2.5             |
| E4009       | 8 570 136           | 9            | 16.5 | 3.2  | 2.8  | 4.4  | 12#                  | 4.0             |
| E6010       | 8 570 137           | 10           | 18   | 3.9  | 3.5  | 6.3  | 10#                  | 6.0             |
| E10-12      | 8 570 138           | 12           | 21.5 | 4.9  | 4.5  | 7.6  | 7#                   | 10              |
| E16-12      | 8 570 139           | 12           | 22.2 | 6.2  | 5.8  | 8.8  | 5#                   | 16              |
| E25-16      | 8 570 130           | 16           | 29   | 7.9  | 7.5  | 11.2 | 4#                   | 25              |
| E35-16      | 8 570 131           | 16           | 30   | 8.7  | 8.3  | 12.7 | 2#                   | 35              |
| E50-25      | 8 570 132           | 25           | 8.7  | 10.9 | 10.3 | 15.3 | 1#                   | 50              |

最大耐压:  $U_i=300$ 伏 材质: 紫铜管 绝缘材质: 尼龙  
Maximum voltage:  $U_i=300$ V Material: red copper-pipe Insulation material: nylon


双线管形预绝缘端头 (TE型)  
double-line pipe-type pre-insulation header(TE type)



| 型号<br>Model | 订货号<br>Order Number | 尺寸 Dimension |      |     |     |      | 导线截面<br>lead section(mm <sup>2</sup> ) |  |
|-------------|---------------------|--------------|------|-----|-----|------|----------------------------------------|--|
|             |                     | F            | L    | D   | d   | W    |                                        |  |
| TE0508      | 8 570 121           | 8            | 14.5 | 1.8 | 1.5 | 5    | 2 × 0.5                                |  |
| TE7508      | 8 570 122           | 8            | 14.7 | 2.1 | 1.8 | 5.5  | 2 × 0.75                               |  |
| TE1008      | 8 570 123           | 8            | 15.1 | 2.3 | 2.0 | 5.5  | 2 × 1.0                                |  |
| TE1508      | 8 570 124           | 8            | 15.5 | 2.6 | 2.3 | 6.4  | 2 × 1.5                                |  |
| TE2510      | 8 570 125           | 10           | 18.5 | 3.3 | 2.9 | 8    | 2 × 2.5                                |  |
| TE4012      | 8 570 126           | 12           | 23.1 | 4.2 | 3.8 | 8.8  | 2 × 4.0                                |  |
| TE6014      | 8 570 127           | 14           | 26.1 | 5.3 | 4.9 | 9.5  | 2 × 6.0                                |  |
| TE10-14     | 8 570 128           | 14           | 26.6 | 6.9 | 6.5 | 12.6 | 2 × 10                                 |  |
| TE16-14     | 8 570 129           | 14           | 31.3 | 8.7 | 8.3 | 19   | 2 × 16                                 |  |

注: TG、JT等标题型号为国家标准, EN、TE、E等表列型号为国家标准。  
Remarks: TG, JT and other headline type are state standard, and the EN, TE, E and other listed type are international standard.

叉型裸端头 (SNB型)  
Fork-type exposed header(SNB type)

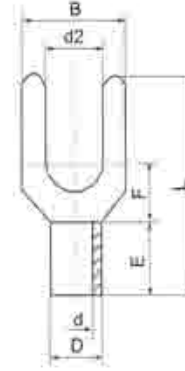

叉型裸端头 (SNB型)  
Fork-type exposed header(SNB type)



叉型预绝缘端头 (SV型)  
FORK-type pre-insulation header(SV type)



叉型预绝缘端头SV与叉型裸端头SNB的技术参数一致。区别在于SV带绝缘套。  
The technical parameter of fork-type pre-insulation header SV is the same as fork-type exposed header SBN, the only distinction lies in SV having insulation cover.

| 型号<br>Model  | 订货号<br>Order Number | 美制螺栓号<br>USA-made bolt number | 螺栓口直径<br>screw bolt mouth's diameter d2(mm) | 尺寸 Dimension(mm) |    |     |     |     |     |
|--------------|---------------------|-------------------------------|---------------------------------------------|------------------|----|-----|-----|-----|-----|
|              |                     |                               |                                             | B                | L  | F   | E   | D   | d   |
| SNB1.25-3    | 8 570 601           | #4                            | 3.2                                         | 5.7              | 16 | 6.5 |     |     |     |
| SNBS1.25-3.5 | 8 570 602           | #6                            | 3.7                                         | 5.7              | 16 | 6.5 |     |     |     |
| SNBL1.25-3.5 | 8 570 603           | #6                            | 3.7                                         | 8.4              | 16 | 6.5 |     |     |     |
| SNBS1.25-4   | 8 570 604           | #8                            | 4.3                                         | 6.4              | 16 | 6.5 |     |     |     |
| SNBM1.25-4   | 8 570 605           | #8                            | 4.3                                         | 7.2              | 16 | 6.5 | 4.8 | 3.4 | 1.7 |
| SNBL1.25-4   | 8 570 606           | #8                            | 4.3                                         | 8.1              | 16 | 6.5 |     |     |     |
| SNBS1.25-5   | 8 570 607           | #10                           | 5.3                                         | 8.1              | 16 | 6.5 |     |     |     |
| SNBL1.25-5   | 8 570 608           | #10                           | 5.3                                         | 9.5              | 16 | 6.5 |     |     |     |
| SNBS1.25-6   | 8 570 609           | 1/4                           | 6.4                                         | 9.5              | 16 | 6.5 |     |     |     |
| SNBL1.25-6   | 8 570 610           | 1/4                           | 6.4                                         | 12               | 22 | 11  |     |     |     |

导线截面0.5~1.5mm<sup>2</sup> (AWG:22-16) 最大电流:  $I_{max}=19$ A 材质: 紫铜 材料厚度0.75mm  
Lead section 0.5~1.5mm<sup>2</sup> (AWG:22-16) Maximum current:  $I_{max}=19$ A Material: red copper-pipe Material thickness 0.75mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made bolt number | 螺栓口直径<br>screw bolt mouth's diameter d2(mm) | 尺寸 Dimension(mm) |    |     |     |     |     |
|-------------|---------------------|-------------------------------|---------------------------------------------|------------------|----|-----|-----|-----|-----|
|             |                     |                               |                                             | B                | L  | F   | E   | D   | d   |
| SNB2-3      | 8 570 611           | #4                            | 3.2                                         | 5.7              | 16 | 6.5 |     |     |     |
| SNBS2-3.5   | 8 570 612           | #6                            | 3.7                                         | 5.7              | 16 | 6.5 |     |     |     |
| SNBL2-3.5   | 8 570 613           | #6                            | 3.7                                         | 6                | 16 | 6.5 |     |     |     |
| SNBS2-4     | 8 570 614           | #8                            | 4.3                                         | 6.4              | 16 | 6.5 |     |     |     |
| SNBM2-4     | 8 570 615           | #8                            | 4.3                                         | 7.2              | 16 | 6.5 | 4.8 | 4.1 | 2.3 |
| SNBL2-4     | 8 570 616           | #8                            | 4.3                                         | 8.1              | 16 | 6.5 |     |     |     |
| SNBS2-5     | 8 570 617           | #10                           | 5.3                                         | 8.1              | 16 | 6.5 |     |     |     |
| SNBL2-5     | 8 570 618           | #10                           | 5.3                                         | 9.5              | 16 | 6.5 |     |     |     |
| SNBS2-6     | 8 570 619           | 1/4                           | 6.4                                         | 9.5              | 16 | 6.5 |     |     |     |
| SNBL2-6     | 8 570 620           | 1/4                           | 6.4                                         | 12               | 22 | 11  |     |     |     |

导线截面1.5~2.5mm<sup>2</sup> (AWG:16-14) 最大电流:  $I_{max}=27$ A 材质: 紫铜 材料厚度0.8mm  
Lead section 1.5~2.5mm<sup>2</sup> (AWG:16-14) Maximum current:  $I_{max}=27$ A Material: red copper-pipe Material thickness 0.8mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made bolt number | 螺栓口直径<br>screw bolt mouth's diameter d2(mm) | 尺寸 Dimension(mm) |      |      |   |   |   |
|-------------|---------------------|-------------------------------|---------------------------------------------|------------------|------|------|---|---|---|
|             |                     |                               |                                             | B                | L    | F    | E | D | d |
| SNB3.5-3    | 8 570 621           | #4                            | 3.2                                         | 5.7              | 18.3 | 7    |   |   |   |
| SNB3.5-4    | 8 570 622           | #8                            | 4.3                                         | 8                | 18.3 | 7    |   |   |   |
| SNB3.5-5    | 8 570 623           | #10                           | 5.3                                         | 8                | 18.3 | 7    | 6 | 5 | 3 |
| SNB3.5-6    | 8 570 624           | 1/4                           | 6.4                                         | 12               | 21.5 | 12.1 |   |   |   |

导线截面2.5~4mm<sup>2</sup> (AWG:16-14) 最大电流:  $I_{max}=37$ A 材质: 紫铜 材料厚度1.0mm  
Lead section 2.5~4mm<sup>2</sup> (AWG:16-14) Maximum current:  $I_{max}=37$ A Material: red copper-pipe Material thickness 1.0mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made bolt number | 螺栓口直径<br>screw bolt mouth's diameter d2(mm) | 尺寸 Dimension(mm) |      |      |   |   |   |
|-------------|---------------------|-------------------------------|---------------------------------------------|------------------|------|------|---|---|---|
|             |                     |                               |                                             | B                | L    | F    | E | D | d |
| SNB5.5-3.5  | 8 570 625           | #6                            | 3.7                                         | 8.3              | 19.5 | 7.5  |   |   |   |
| SNBS5.5-4   | 8 570 626           | #8                            | 4.3                                         | 8.3              | 19.5 | 7.5  |   |   |   |
| SNBL5.5-4   | 8 570 627           | #8                            | 4.3                                         | 9                | 19.5 | 7.5  |   |   |   |
| SNBS5.5-5   | 8 570 628           | #10                           | 5.3                                         | 9                | 19.5 | 7.5  |   |   |   |
| SNBS5.5-6   | 8 570 629           | 1/4                           | 6.4                                         | 9                | 25.5 | 12   |   |   |   |
| SNBL5.5-6   | 8 570 630           | 1/4                           | 6.4                                         | 12               | 25.5 | 12   |   |   |   |
| SNB5.5-8    | 8 570 631           | 5/16                          | 8.4                                         | 14               | 24.5 | 11.5 |   |   |   |

导线截面4~6mm<sup>2</sup> (AWG:12-10) 最大电流:  $I_{max}=48$ A 材质: 紫铜 材料厚度1.0mm  
Lead section 4~6mm<sup>2</sup> (AWG:12-10) Maximum current:  $I_{max}=48$ A Material: red copper-pipe Material thickness 1.0mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made bolt number | 螺栓口直径<br>screw bolt mouth's diameter d2(mm) | 尺寸 Dimension(mm) |      |     |      |      |     |
|-------------|---------------------|-------------------------------|---------------------------------------------|------------------|------|-----|------|------|-----|
|             |                     |                               |                                             | B                | L    | F   | E    | D    | d   |
| SNB8-4      | 8 570 632           | #8                            | 4.3                                         | 8.7              | 23   | 6   | 8.5  | 7.2  | 4.2 |
| SNB8-5      | 8 570 633           | #10                           | 5.3                                         | 12               | 24.5 | 5.7 | 8.5  | 7.2  | 4.5 |
| SNB8-6      | 8 570 634           | 1/4                           | 6.4                                         | 12               | 24.5 | 5.7 | 8.5  | 7.2  | 4.5 |
| SNB8-8      | 8 570 635           | 5/16                          | 8.4                                         | 14.5             | 28.0 | 8.3 | 8.5  | 7.2  | 4.5 |
| SNB14-6     | 8 570 636           | 1/4                           | 6.4                                         | 12               | 28.0 | 7.5 | 10.5 | 9.0  | 5.8 |
| SNB14-14-8  | 8 570 637           | 5/16                          | 8.4                                         | 14               | 28.0 | 7.5 | 10.5 | 9.0  | 5.8 |
| SNB14-22-8  | 8 570 638           | 5/16                          | 8.4                                         | 14               | 34.5 | 9.0 | 12   | 11.5 | 7.7 |

材质: 紫铜 材料厚度 1.2mm 1.4mm 1.7mm  
Material: red copper-pipe Material thickness 1.2mm 1.4mm 1.7mm

圆型裸端头 ( RND型 )  
Round-type exposed header(RND type)

| 型号<br>Model  | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |     |     |     |
|--------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|-----|-----|-----|
|              |                     |                                  |                                                | B                | L    | F    | E   | D   | d   |
| SNB1.25-3    | 8 570 201           | #4                               | 3.2                                            | 5.7              | 12.6 | 4.95 |     |     |     |
| SNBS1.25-3.5 | 8 570 202           | #6                               | 3.7                                            | 5.7              | 12.6 | 4.95 |     |     |     |
| RNBM1.25-3.5 | 8 570 203           | #6                               | 3.7                                            | 6.6              | 14.4 | 6.3  |     |     |     |
| RNBL1.25-3.5 | 8 570 204           | #6                               | 3.7                                            | 8.0              | 15.8 | 7.0  |     |     |     |
| RNBS1.25-4   | 8 570 205           | #8                               | 4.3                                            | 6.6              | 14.4 | 6.3  |     |     |     |
| RNBL1.25-4   | 8 570 206           | #8                               | 4.3                                            | 8.0              | 15.8 | 7.0  | 4.8 | 3.4 | 1.7 |
| RNBS1.25-5   | 8 570 207           | #10                              | 5.3                                            | 8.0              | 15.8 | 7.0  |     |     |     |
| RNBL1.25-5   | 8 570 208           | #10                              | 5.3                                            | 9.8              | 18   | 8.5  |     |     |     |
| RNBS1.25-6   | 8 570 209           | 1/4                              | 6.4                                            | 9.8              | 18   | 8.5  |     |     |     |
| RNBL1.25-6   | 8 570 210           | 1/4                              | 6.4                                            | 11.6             | 21.8 | 11.1 |     |     |     |
| RNB1.25-8    | 8 570 211           | 5/16                             | 8.4                                            | 11.6             | 21.8 | 11.1 |     |     |     |
| RNB1.25-10   | 8 570 212           | 3/8                              | 10.5                                           | 13.6             | 25.5 | 13.9 |     |     |     |
| RNBL1.25-12  | 8 570 213           | 1/2                              | 13.0                                           | 19.2             | 31   | 16.5 |     |     |     |

圆型裸端头 ( RND型 )  
Round-type exposed  
header(RND TYPE)



圆型预绝缘端头 ( RV)型  
Round-type pre-insulation  
header(RV type)



圆型预绝缘端头RV与圆型裸端头RNB的技术参数一致。区别在于RV带绝缘套。  
The technical parameter of round-type pre-insulation header RV is the same as round-type exposed header RNB, the only distinction lies in RV having insulation cover.

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |     |     |     |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|-----|-----|-----|
|             |                     |                                  |                                                | B                | L    | F    | E   | D   | d   |
| SNB2-3      | 8 570 214           | #4                               | 3.2                                            | 6.6              | 12.3 | 4.3  |     |     |     |
| SNBS2-3.5   | 8 570 215           | #6                               | 3.7                                            | 6.6              | 12.3 | 4.3  |     |     |     |
| RNBM2-3.5   | 8 570 216           | #6                               | 3.7                                            | 6.6              | 16.0 | 7.0  |     |     |     |
| RNBL2-3.5   | 8 570 217           | #6                               | 3.7                                            | 8.5              | 16.8 | 7.75 |     |     |     |
| RNBS2-4     | 8 570 218           | #8                               | 4.3                                            | 6.6              | 16.0 | 7.0  |     |     |     |
| RNBL2-4     | 8 570 219           | #8                               | 4.3                                            | 8.5              | 16.8 | 7.75 | 4.8 | 4.1 | 2.6 |
| RNBS2-5     | 8 570 220           | #10                              | 5.3                                            | 8.5              | 16.8 | 7.75 |     |     |     |
| RNBL2-5     | 8 570 221           | #10                              | 5.3                                            | 9.5              | 16.8 | 7.25 |     |     |     |
| RNBS2-6     | 8 570 222           | 1/4                              | 6.4                                            | 12               | 21.8 | 11   |     |     |     |
| RNB2-8      | 8 570 223           | 5/16                             | 8.4                                            | 12               | 21.8 | 11   |     |     |     |
| RNB2-10     | 8 570 224           | 3/8                              | 10.5                                           | 13.6             | 25.5 | 13.9 |     |     |     |
| RNBL2-12    | 8 570 225           | 1/2                              | 13.0                                           | 19.2             | 31   | 16.5 |     |     |     |

导线截面 1.5 ~ 2.5mm<sup>2</sup> ( AWG:16-14) 最大电流: I<sub>max</sub>=27A 材质: 紫铜 材料厚度 0.8mm  
Lead section 1.5 ~ 2.5mm<sup>2</sup> ( AWG:16-14) Maximum current: I<sub>max</sub>=27A Material: red copper-pipe Material thickness 0.8mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |     |   |   |   |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|-----|---|---|---|
|             |                     |                                  |                                                | B                | L    | F   | E | D | d |
| RNB3.5-4    | 8 570 226           | #8                               | 4.3                                            | 8.0              | 18   | 7.7 |   |   |   |
| RNB3.5-5    | 8 570 227           | #10                              | 5.3                                            | 8.0              | 18   | 7.7 |   |   |   |
| RNBL3.5-5   | 8 570 228           | #10                              | 5.3                                            | 12.0             | 21.4 | 7.7 | 6 | 5 | 3 |
| RNB3.5-6    | 8 570 229           | 1/4                              | 6.4                                            | 12               | 21.4 | 7.7 |   |   |   |

导线截面 2.5 ~ 4mm<sup>2</sup> ( AWG:16-14) 最大电流: I<sub>max</sub>=37A 材质: 紫铜 材料厚度 1.0mm  
Lead section 2.5 ~ 4mm<sup>2</sup> ( AWG:16-14) Maximum current: I<sub>max</sub>=37A Material: red copper-pipe Material thickness 1.0mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |     |     |     |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|-----|-----|-----|
|             |                     |                                  |                                                | B                | L    | F    | E   | D   | d   |
| RNB5.5-3.5  | 8 570 230           | #6                               | 3.7                                            | 7.2              | 15.7 | 5.9  |     |     |     |
| RNBS5.5-4   | 8 570 231           | #8                               | 4.3                                            | 7.2              | 15.7 | 5.9  |     |     |     |
| RNBL5.5-4   | 8 570 232           | #8                               | 4.3                                            | 9.5              | 19.8 | 8.3  | 6.8 | 5.6 | 3.4 |
| RNB5.5-5    | 8 570 233           | #10                              | 5.3                                            | 9.5              | 19.8 | 8.3  |     |     |     |
| RNB5.5-6    | 8 570 234           | 1/4                              | 6.4                                            | 12               | 25.8 | 13.0 |     |     |     |
| RNB5.5-8    | 8 570 235           | 5/16                             | 8.4                                            | 15               | 28.0 | 13.7 |     |     |     |
| RNB5.5-10   | 8 570 236           | 3/8                              | 10.5                                           | 15               | 28.0 | 13.7 |     |     |     |
| RNB5.5-12   | 8 570 237           | 1/2                              | 13.0                                           | 19.2             | 32.4 | 16   |     |     |     |

导线截面 4 ~ 6mm<sup>2</sup> ( AWG:12-10) 最大电流: I<sub>max</sub>=47A 材质: 紫铜 材料厚度 1.0mm  
Lead section 4 ~ 6mm<sup>2</sup> ( AWG:12-10) Maximum current: I<sub>max</sub>=47A Material: red copper-pipe Material thickness 1.0mm

圆型裸端头 ( RNB型 )  
Round-type exposed header(RNB type)

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |     |     |     |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|-----|-----|-----|
|             |                     |                                  |                                                | B                | L    | F    | E   | D   | d   |
| RNB8-4      | 8 570 238           | #8                               | 4.3                                            | 8.8              | 23.8 | 9.3  |     |     |     |
| RNBS8-5     | 8 570 239           | #10                              | 5.3                                            | 8.8              | 23.8 | 11.1 |     |     |     |
| RNBM8-5     | 8 570 240           | #10                              | 5.3                                            | 12               | 23.8 | 9.3  |     |     |     |
| RNBL8-5     | 8 570 241           | #10                              | 5.3                                            | 15               | 29.8 | 13.8 |     |     |     |
| RNBS8-6     | 8 570 242           | 1/4                              | 5.3                                            | 15               | 29.8 | 13.8 | 8.5 | 7.2 | 4.5 |
| RNBL8-6     | 8 570 243           | 1/4                              | 6.4                                            | 12               | 23.8 | 9.3  |     |     |     |
| RNB8-8      | 8 570 244           | 5/16                             | 8.4                                            | 15               | 29.8 | 13.8 |     |     |     |
| RNBL8-10    | 8 570 245           | 3/8                              | 10.5                                           | 15               | 29.8 | 13.8 |     |     |     |
| RNBS8-12    | 8 570 246           | 1/2                              | 13.0                                           | 20               | 33.5 | 15   |     |     |     |

导线截面 6 ~ 10mm<sup>2</sup> ( AWG:8) 最大电流: I<sub>max</sub>=62A 材质: 紫铜 材料厚度 1.2mm  
Lead section 6 ~ 10mm<sup>2</sup> ( AWG:8) Maximum current: I<sub>max</sub>=62A Material: red copper-pipe Material thickness 1.2mm

圆型裸端头 ( RND型 )  
Round-type exposed  
header(RND TYPE)



圆型预绝缘端头 ( RV)型  
Round-type pre-insulation  
header(RV type)



圆型预绝缘端头RV与圆型裸端头RNB的技术参数一致。区别在于RV带绝缘套。  
The technical parameter of round-type pre-insulation header RV is the same as round-type exposed header RNB, the only distinction lies in RV having insulation cover.

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |      |     |     |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|------|-----|-----|
|             |                     |                                  |                                                | B                | L    | F    | E    | D   | d   |
| RNB14-4     | 8 570 247           | #8                               | 4.3                                            | 12.0             | 29.8 | 13.3 |      |     |     |
| RNBS14-5    | 8 570 248           | #10                              | 5.3                                            | 12.0             | 29.8 | 13.3 |      |     |     |
| RNBS14-6    | 8 570 249           | 1/4                              | 6.4                                            | 12.0             | 29.8 | 13.3 |      |     |     |
| RNBL14-6    | 8 570 250           | 1/4                              | 8.4                                            | 16               | 32.8 | 13.3 | 10.5 | 9.0 | 5.8 |
| RNB14-8     | 8 570 251           | 5/16                             | 8.4                                            | 16               | 32.8 | 14.5 |      |     |     |
| RNBL14-10   | 8 570 252           | 3/8                              | 10.5                                           | 16               | 32.8 | 14.5 |      |     |     |
| RNB14-12    | 8 570 253           | 1/2                              | 13                                             | 22               | 41   | 19.5 |      |     |     |

导线截面 10 ~ 16mm<sup>2</sup> ( AWG:6) 最大电流: I<sub>max</sub>=88A 材质: 紫铜 材料厚度 1.4mm  
Lead section 10 ~ 16mm<sup>2</sup> ( AWG:6) Maximum current: I<sub>max</sub>=88A Material: red copper-pipe Material thickness 1.4mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |    |      |     |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|----|------|-----|
|             |                     |                                  |                                                | B                | L    | F    | E  | D    | d   |
| RNBS22-5    | 8 570 254           | #10                              | 5.3                                            | 12.2             | 33.2 | 14.5 |    |      |     |
| RNBL22-5    | 8 570 255           | #10                              | 5.3                                            | 16.5             | 33.7 | 13.5 |    |      |     |
| RNBS22-6    | 8 570 256           | 1/4                              | 6.4                                            | 12.2             | 33.2 | 14.5 |    |      |     |
| RNBL22-6    | 8 570 257           | 1/4                              | 6.4                                            | 16.5             | 33.7 | 13.5 |    |      |     |
| RNB22-8     | 8 570 258           | 5/16                             | 8.4                                            | 16.5             | 33.7 | 13.5 | 12 | 11.5 | 7.7 |
| RNB22-10    | 8 570 259           | 3/8                              | 10.5                                           | 16.5             | 33.7 | 13.5 |    |      |     |
| RNB22-11    | 8 570 260           | 7/16                             | 11.5                                           | 22               | 42.5 | 19.5 |    |      |     |
| RNB22-12    | 8 570 261           | 1/2                              | 13                                             | 22               | 42.5 | 19.5 |    |      |     |

导线截面 16 ~ 25mm<sup>2</sup> ( AWG:4) 最大电流: I<sub>max</sub>=115A 材质: 紫铜 材料厚度 1.7mm  
Lead section 16 ~ 25mm<sup>2</sup> ( AWG:4) Maximum current: I<sub>max</sub>=115A Material: red copper-pipe Material thickness 1.7mm

| 型号<br>Model | 订货号<br>Order Number | 美制螺栓号<br>USA-made<br>bolt number | 螺栓口直径<br>screw bolt mouth's<br>diameter d2(mm) | 尺寸 Dimension(mm) |      |      |    |      |     |
|-------------|---------------------|----------------------------------|------------------------------------------------|------------------|------|------|----|------|-----|
|             |                     |                                  |                                                | B                | L    | F    | E  | D    | d   |
| RNB38-5     | 8 570 262           | #10                              | 5.3                                            | 15.3             | 39.0 | 18.3 |    |      |     |
| RNB38-6     | 8 570 263           | 1/4                              | 6.4                                            | 15.3             | 39.0 | 18.3 |    |      |     |
| RNBS38-8    | 8 570 264           | 5/16                             | 8.4                                            | 15.3             | 39.0 | 18.3 |    |      |     |
| RNBL38-8    | 8 570 265           | 5/16                             | 8.4                                            | 22.0             | 42.7 | 17.7 |    |      |     |
| RNBS38-10   | 8 570 266           | 3/8                              | 10.5                                           | 15.3             | 39.0 | 18.3 | 14 | 13.3 | 9.4 |
| RNBL38-10   | 8 570 267           | 3/8                              | 10.5                                           | 22               | 42.7 | 17.7 |    |      |     |
| RNB38-11    | 8 570 268           | 7/16                             | 11.5                                           | 22               | 42.7 | 17.7 |    |      |     |
| RNB38-12    | 8 570 269           | 1/2                              | 13.0                                           | 22               | 42.7 | 17.7 |    |      |     |

导线截面 35 ~ 50mm<sup>2</sup> ( AWG:2) 最大电流: I<sub>max</sub>=160A 材质: 紫铜 材料厚度 1.8mm  
Lead section 35 ~ 50mm<sup>2</sup> ( AWG:2) Maximum current: I<sub>max</sub>=160A Material: red copper-pipe Material thickness 1.8mm